


AROLLA AQUA M-LT CL3043

DATA SHEET

15th JUNE 2026



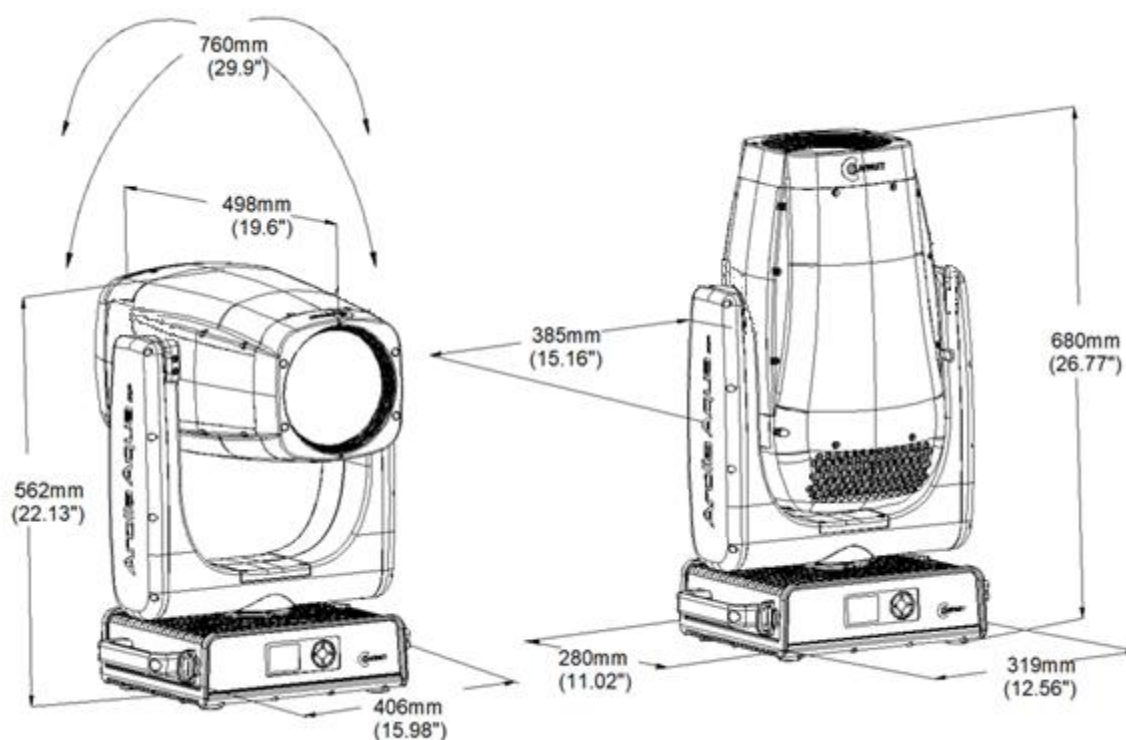

LIGHT SOURCE:

- Power:**
 - 550W
- Color temperature:**
 - 6500 K $\pm$ 300K
- CRI:**
 - Up to 70 with selectable filter for CRI up to 88
- LED life expectancy:**
 - 40.000 Hrs L70*

* It may vary depending on various factors, such as the type of use and environment

PHOTOMETRIC DATA:

- Zoom range:**
 - 3.5° - 53.5°
- Lm output:**
 - 31.000 Lm (integrating sphere)
- Front lens:**
 - Ø 160 mm
- Optical syst.:**
 - High efficiency

NOISE LEVEL:

Fixed presets:	Silent mode:	37.8 dB
	Auto mode:	39.0 dB
	Theatre mode:	35.2 dB
	Constant mode:	43.6 dB

CONTROL & CONNECTIONS:

- | | |
|-----------------------|--|
| Personalities: | <ul style="list-style-type: none">• 2 modes:<ul style="list-style-type: none">◦ Basic: 44 channels◦ Standard: 54 channels |
| Protocols: | <ul style="list-style-type: none">• DMX, Art-Net, sACN, RDM• CRMX (Timo FX) (Lumen Radio) |
| Connectors: | <ul style="list-style-type: none">• Locking 5 pin XLR IN/OUT• RJ45 IN/OUT |
| Power con.: | <ul style="list-style-type: none">• PowerCon True1 IN/OUT |
| Web server: | <ul style="list-style-type: none">• Built-in |
| CloudIO: | <ul style="list-style-type: none">• Fully compatible |

DYNAMIC EFFECTS:

- | | |
|--------------------------|--|
| Colors: | <ul style="list-style-type: none">• Linear CMY/CTO color mixing• Linear CTO filter 3000K – 6500K• 1 color wheel with 6 dichroic colors, tint channel |
| Framing Systems: | <ul style="list-style-type: none">• 4 blades ($\pm 35^\circ$ inclination) with $\pm 60^\circ$ rotation of the full system• "Total Curtain" effect allowing full blackout with each single blade• Built-in macros |
| Gobos: | <ul style="list-style-type: none">• 1 static gobo wheel with 9 dichroic fixed interchangeable gobos• 1 rotating gobo wheel with 7 interchangeable glass gobos |
| Frost: | <ul style="list-style-type: none">• 2 frost filters: 1 heavy and one soft |
| Rotating effects: | <ul style="list-style-type: none">• 1 four-facet conical prism with rotation in both directions at variable speed• 1 four-facet linear prism with rotation in both directions at variable speed• 1 aluminium animation disc with continuous rotation in both directions at variable speed movement |
| Iris: | <ul style="list-style-type: none">• 3% - 100% linear adjustment• Motorized with variable pulse effects |
| Movement: | <ul style="list-style-type: none">• Tilt: endless• Pan: endless• Absolute position• Automatic repositioning• Tilt brake• Mechanical Pan/Tilt lock for safe transportation and maintenance |
| Beam: | <ul style="list-style-type: none">• Motorized zoom and focus |

Dimmer / Shutter:

- High resolution electronic dimmer - 24 bit, 5 curves
- High speed electronic shutter and strobe

HARDWARE & SOFTWARE:

- Long life self-charging battery
- Display graphic LCD backlit B/W display
- Firmware upload from another fixture
- Firmware upgrade via Web Server
- Diagnostic
- DMX monitoring
- Remote access through RDM

HOUSING:

- Magnesium and steel structure with plastic components
- Two side handles for transportation
- IP66 protection rate
- Working in any position
- Hanging system: with fast-lock Omega clamps (1/4 turn on the base)
- Optional safety chain

ELECTRICAL:

Operating voltage:

- 100-240V, 50/60 Hz

Power Supply:

- Electronic auto range with active PFC

MAX power consumption:

- Max 1000W (10.0A) @ 100V - 900W (4,0A) @ 240V

THERMAL SPECIFICATION:

MAX Ambient temperature: • 45°C (113°F)

Min Ambient Temperature: • -20°C (-4°F)

SAFETY SPECIFICATIONS:

Min. dist. of illum. objs:

- 4,5 m

Min. dist. from flamm. mat.:

- 0,2 m (8')

Protections:

- Thermally protected power supply (overheating and cooling failure)
- Forced ventilation with axial fans
- Battery fuse: T6.3A 250V
- Main fuse: 10A 250V

COMPLIANCE:

CE Marking (in conformity to the following):

- 2014/53/EU - Radio Equipment Directive (RED)

- 2011/65/EU - Restriction of the use of certain hazardous substances (RoHS)
- 2009/125/EC - EcoDesign requirements for Energy-related Products (ErP)

UKCA conforms to UK regulations:

- S.I. 2017 N.1206
- S.I. 2012 N.3032
- S.I. 2021 N.745

cETLus LISTED:

- UL 1573:2003
- CSA C22.2 N.166:2015

PACKAGING:

- Carton box + Polystyrene
- Carton box + Foam shell
- Flight case + Foam shell

WEIGHT & SIZES:

Weight: • 31.2 Kg (68.8 lbs)

Base dim.s: • 319 x 280 mm
• 12,5 x 11,0 In

Height with vert. head (h): • 680 mm
• 26,77 In

Dist. b/t 2 fixt: • 800 mm
• 31,5 In

Max size: • 406 x 385 mm
• 16 x 15,2 In

ACCESSORIES:

Omega bracket: • 2x183102/805 (Included)

ETL Power: • CAB02B/802 (Included)*
* Cord 1.5 m (bare end with IP65 PowerConTrue1 conn.)

Flight case: • CF1051 (Optional)

Flight case + foam shell (2 pos.): • CF1051F (Optional)

Safety Chain: • 105041/001 (Optional)

Clamp: • C21070 (Optional)

WARNING: THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY CLAY PAKY S.R.L.