



Building on the launch and immediate success of the all-new Veloce Profile, Ayrton proudly introduces Veloce Wash—the fourth luminaire in the “Ultimate” family—featuring a state-of-the-art design and exceptional performance. Engineered with the advanced principle of perfect scalability, this ultra-compact luminaire redefines integration, housing a sealed 850 W high-efficiency LED module calibrated at 6500 K. Delivering an impressive 40,000 lumen output with optimal black body positioning, it guarantees flawless light neutrality.

Like all Ultimate series luminaires, Veloce Wash is a versatile powerhouse, designed to excel in any environment—indoors, outdoors, and even in coastal conditions. Its lightweight aluminium construction minimizes weight, achieving the industry’s best weight-to-power ratio without relying on costly or unstable special alloys.

★ KEY FEATURES

➤ Timeless Fresnel Lens Design

Veloce Wash features a classic Fresnel lens, which is known for its distinct ridged edges that refract and disperse light, enhancing source visibility and depth on stage. It is an ideal choice for top-light and back-light applications, providing seamless and uniform coverage that integrates naturally into stage design.

➤ Advanced Variable Frost

The frost in Veloce Wash is progressive, allowing for smooth transitions in diffusion. Three flags close in front of the beam, similar to the overlapping blades of an iris. At 100% intensity, the level of diffusion is equivalent to 20 degrees..

➤ Scrim Filter

The scrim filter in Veloce wash is above all a glass gobo. It has a neutral density gradient from 100% opaque to clear.

The intention is for it to be used to even out the intensity and remove the hotspot of a beam when projecting onto the stage at an angle or onto a wall or cloth.

➤ Beam shaper

The beam shaper is a piece of brushed silk, housed in one of the prism slots and is fully rotatable and indexable. This accessory is designed to spread and elongate the beam to create an oblong beam of human proportions in a similar way to a CP62 parcan

➤ Lightweight

Ayrton’s engineers have introduced lightweight aluminium components to drastically reduce weight, achieving the best power-to-weight ratio in its class—without relying on costly or unstable alloys. At just 39 kg, it’s the lightest in its category.



TECHNICAL SPECIFICATIONS

SOURCE

Engine	LED Mono Block, Sealed, White
LED Watts	850 W (total fixture use, see Electrical section)
LED Engine Life (L70)	Up to 40,000 hours
LED Refresh Rate	1.2 kHz, 2.4 kHz, 16 kHz, 25 kHz
Dimming	Electronic
Dimming Curves	Square & Linear
Dimming Control Options	Auto on/off dimmer smoothing when Snap effects
Strobe Speed	1-25 Hz Per Second
Strobe Modes	Strobe Effects / Pulse Effects / Random Effects

ELECTRICAL

Max Power Consumption	1,300 W
Standby Consumption	177.5 W @ 20 °C
Voltage Range	100-240 V 50-60 Hz
Current (Max)	5.5 A @ 230 V / 11.6 A @ 110 V
Inrush (Half Cycle)	110 V: 19.2 A 230 V: 16.6 A
Total Fixtures per Circuit	N/A
Connector	PowerCON True1 TOP
Power Supply Unit	Active PFC
Contains Battery	N/A

TYPICAL POWER AND CURRENT

120V , 60Hz	9.624 A, 1138 W, PF 0.988
208V, 60Hz	5.482 A, 1110 W, PF 0.960
230V, 50Hz	5.029 A, 1108 W, PF 0.957
240V, 50Hz	4.998 A, 1105 W, PF 0.954

Suitable disclaimer nominal, etc

OPTICAL PERFORMANCE

Lens Size	190 mm (7.48 in)
Zoom Range	4° (half peak) to 57° (one-tenth peak)
Zoom Ratio	14:1
Gate Size	25 mm (0.98 in)

MOVEMENT

Pan Range		Infinite
Pan Speed (End to End or range)	180°	88.1 rpm
	360°	141.4 rpm
	EtoE	181 rpm
Tilt Range		Infinite
Tilt Speed (End to End or range)	180°	94 rpm
	360°	149.5 rpm
	EtoE	110 rpm
Resolution		8- or 16-bit
Calibration Time		77.7 sec
Position Correction System		Yes / Automatic repositioning
Follow Spot Modes		Manual & Tracking system

COLOUR SYSTEM

Colour System(s)	CMY, CTO and 7-Colour Wheel
Control	CMY 16-bit & 8-bit
CTO	2900 K - 6500 K
Variable CTP	TrueColour Enhancer™ filter to 88 CRI
Colour Wheel	One Wheel. Seven Dichroic changeable colours
Colour Wheel Effects	Continuous Rotation

GOBOS

Indexing Wheel	1
Indexing Gobos	6 + 1 Scrim Filter (Glass see load below)
Gobo Diameter	30 mm
Image Diameter	18 mm
Gobo Thickness	1.1 mm
Animation Wheel	Yes, CMY + RGB
Animation Details	Bi-Directional with continuous rotation

TECHNICAL SPECIFICATIONS

PERFORMANCE		
LED engine out (Sphere)		Up to 40,000 lm
Fixture Output (Sphere)		38,800 lm (Fan Mode Auto)
		39,600 lm (Fan Mode Stage)
		29,500 lm (Fan Mode Silence)
		20,600 lm (Fan Mode Super Silence)
Fixture Output (Goniometer)		30,800 lm (Fan Mode Auto after derating)
Field Lumens (Goniometer)	Narrow	13,800 lm
	Middle	30,800 lm
	Wide	31,800 lm
Lumen Per Watt (LPW) Max fixture output / 230 V Typical power		35.7
CCT		6500 K (±350 K)
Δ uv		-0.0005
CRI		Ra: 70 (±2)
With TrueColour Enhancer™ Filter		Up to 86
Tm30		Rf: 70 Rg: 94.6
TLCI		48
CQS		68.3

IMAGING	
Framing	4 Blade – 4 Plain Full Swipe
Framing Rotation	+/- 90°
Iris	15 Blade - 15% to 100% (Open)
Frost	0% to 100% variable linear frost
Effects	▪ Focusable CMY & RGB graphic animation effect-wheel with continuous rotation in both directions. ▪ Beam ovalising filter, indexable and rotatable

CONNECTORS	
Power	In powerCON True 1
DMX	In/Thru 5 Pin XLR
Network	In/Thru RJ45
Wireless	DMX Only

CONTROL	
DMX Control	DMX (USITT DMX-512-A) RDM (ANSI/ESTA E1.20)
Transceiver/Receiver	RS-485 with Opto Isolation
DMX Modes	2 User Modes
Channel Count	Mode St – 38 / Mode Ex – 60
DMX Chart	Scan the QR code on page 5
Network Protocols	ArtNet & sACN
Local Control	Colour LCD Panel 5 Menu Buttons NFC
Stand Alone Mode	Leader/Follower, presets 250
RDM Functions	Yes
Wireless DMX	CRMX TiMo RDM receiver
WiFi Card	Included
USB Port	No

THERMAL	
Max Surface Temperature, steady state, at Ta 40°	90 °C (194 °F)
Max Ambient Temperature (Ta Max)	45 °C (113 °F)
Min Ambient Temperature (Ta Min)	-20 °C (-4 °F)
Total Heat Dissipation (Calculated +/- 10%)	323.8 BTU/H 1105 W @ 240 V 333.4 BTU/H 1138 W @ 120 V
Minimum distance to illuminated surface	2 m (6.56 ft)
Minimum distance to combustible surface	4 m (13.12 ft)
Thermal Protection system	Yes
Cooling modes	See Acoustics
Cooling System	Advanced Liquid Cooling

TECHNICAL SPECIFICATIONS

ACOUSTICS STATIC

Fan Mode	dBA ¹	NC ²
Auto	41.6 dBA	32
Stage	46.1 dBA	37
Silence/Studio	36.4 dBA	26
Super Silence	34.8 dBA	26

DYNAMIC

Mode	dBA ¹	NC ²
Auto	42.5 dBA	32
Stage	46.2 dBA	37
Silence/Studio	40.6 dBA	30
Super Silence	40.1 dBA	30

1. Measured @ 1m Static, 31dBA ambient


2. Noise Criterion

https://www.engineeringtoolbox.com/nc-noise-criterion-d_517.html

ENVIRONMENTAL

IP Rating	IP65 / IP66
Salt Spray Testing	Pending
Estimated embodied carbon including: ▪ A1 – Raw materials of fixture and packaging ▪ A3 – Product manufacturing	371.9 kg CO ₂ e/fixture
Recycling options	Packaging widely recyclable. Cardboard is made of recycled pulp ³ .
SIP Optional	Yes

Our Environmental Commitment



3. Up to 92%

WARRANTY

Fixture	2 years
LED Engine	5 years

From date of invoice

INSTALLATION

Orientation	Any
Mounting attachments	- Fastening bracket system: two Omega ¼ turn brackets designed for use with standard clamps. - Mounting points: four ¼ turn locking fittings allowing installation of Omega brackets on luminaire. - Safety cable attachment point.
Installation version	Yes IP66

CONSTRUCTION

Colour	Carbon Black Standard Custom colours on request
Materials	- Moving-head skeleton made of aluminium and steel metal plates - Head in die-cast aluminium - Base in die-cast aluminium - Heatsinks in aluminium and copper - Arms in self-extinguishing fire retardant ABS PC (V0 class) - Four-side handles for transportation - Four heavy-duty feet for better stability


INCLUDED ITEMS

Manual	1
OMEGA brackets with quarter-turn locks	2
Cables	- IP65: 1 cable PowerCON True1 TOP to bare end, 1.5m - IP66: DMX IN / OUT tails to bare end for IP66 DMX connection - Ethernet IN / OUT tails to bare end for IP66 ArtNet™ connection - Power tail to bare end for IP66 power connection
Other accessories	N/A

TECHNICAL SPECIFICATIONS

PHYSICAL	
Fixture	
Length	405 mm (15.9 in)
Height	757 mm (29.8 in)
Depth	366 mm (14.4 in)
Weight	39 kg (85.9 lb)
IP65	
Length	405 mm (15.9 in)
Height	757 mm (29.8 in)
Depth	366 mm (14.4 in)
Weight	39 kg (85.9 lb)
IP66	
Length	405 mm (15.9 in)
Height	757 mm (29.8 in)
Depth	366 mm (14.4 in)
Weight	39 kg (85.9 lb)
Shipping Dimensions	
Length	695 mm (27.4 in)
Height	745 mm (29.3 in)
Depth	515 mm (20.3 in)
Weight	54.5 kg (lb)
In SIP Dimensions	
Length	680 mm (26.7in)
Height	640 mm (25.2 in)
Depth	500 mm (19.7 in)
Weight (excl fixture)	10 kg (22 lb)

SIP Drawing

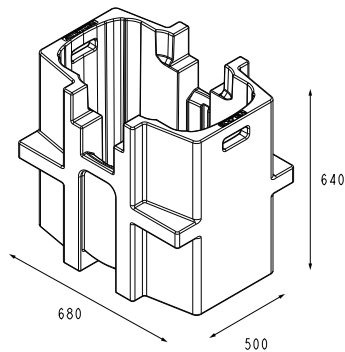







SUPPORTING DOCUMENTS	
Manual	
GDTF Profile	
GMA Profile	
IES File	
DMX Chart	
Photometric Files	
Software	
Warranty	

COMPLIANCE	
EU (EMC & LVD)	• EMC Directive 2014/30/EU • LVD Directive 2014/35/EU
US (Safety & EMC)	• UL 1573 • FCC Part 15, Subpart B: 2023
Substance Regulations	• RoHS • REACH • CP65
Declarations	Scan the QR code above


ORDERING DETAILS	
Veloce Wash S	012541

ACCESORIES	
IP Test Kit	048250
Lynx Control	045130
Omega Bracket	GP50501990353


TECHNICAL SPECIFICATIONS

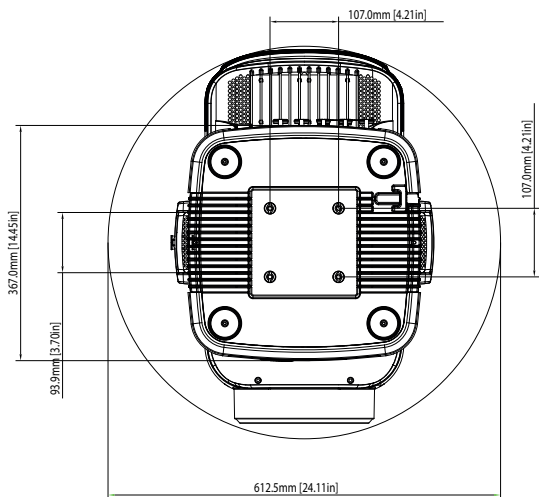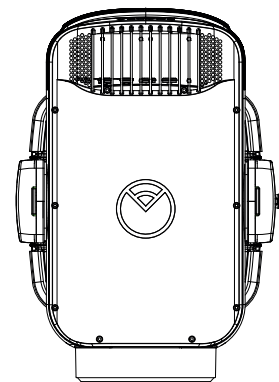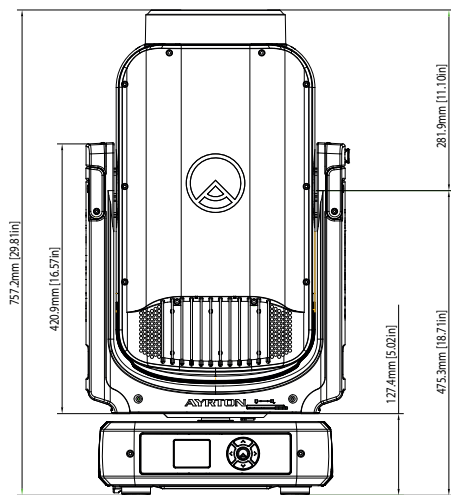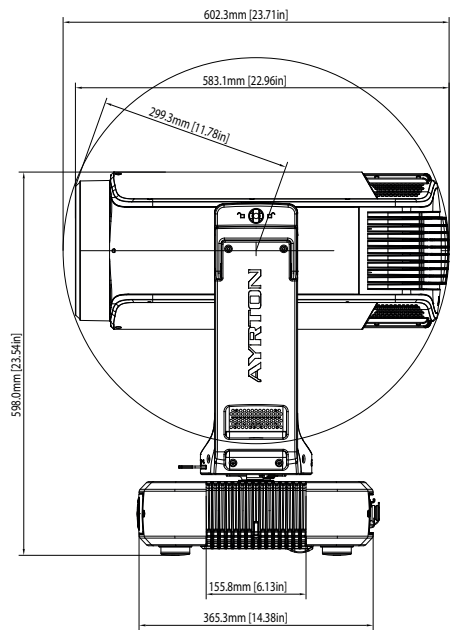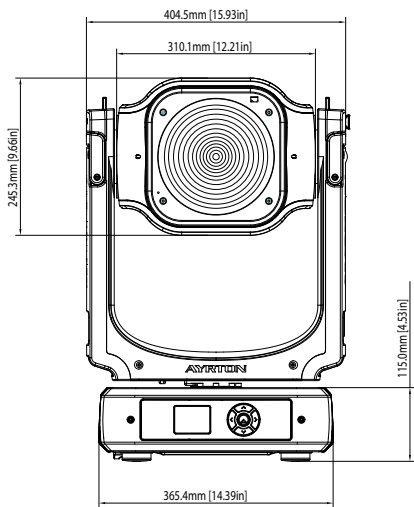


TECHNICAL SPECIFICATIONS

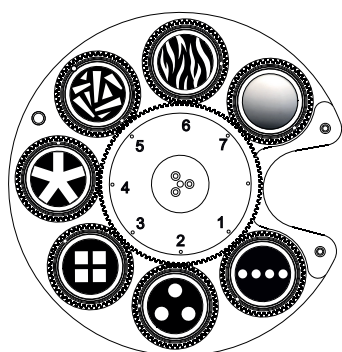


> Dimension/Tolerance/Requirement:



> Temperature Tolerance: 500°C

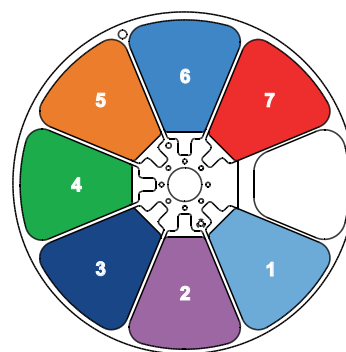

> Dimension/Tolerance/Requirement:




GOBO WHEEL

Rotating Gobo

1	314	Dot Line 4	GPG0500504
2	326	Dot Triangle 3	GPG0500506
3	332	Square Beam 4	GPG0500507
4	342	Five Spokes	GPG0500509
5	266	Breaking Glass	GPG0500505
6	098	Waves	GPG0500508
7	-	Scrim Filter	GPG0500662

COLOUR WHEEL

1	CTB 1/4	GPG0100097
2	Magenta	GPG0100098
3	Congo Blue	GPG0100099
4	Green	GPG0100100
5	Orange	GPG0100101
6	Blue	GPG0100102
7	Red	GPG0100103




ANIMATION WHEEL

- GP603039901290

BEAM SHAPER

-

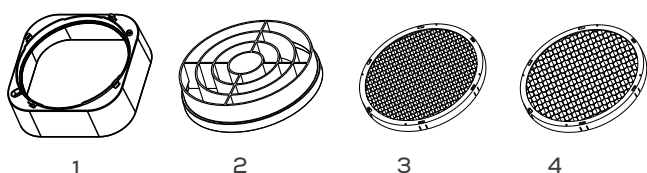


ACCESSORIES

1	Top Hat	GPC0001050N0
2	Concentric Ring	GPC0001157N0
3	Honey Comb Small	GPP0005667
4	Honey Comb Big	GPP0005666

AUTO MODE: PHOTOMETRIC DETAIL


MIN ZOOM

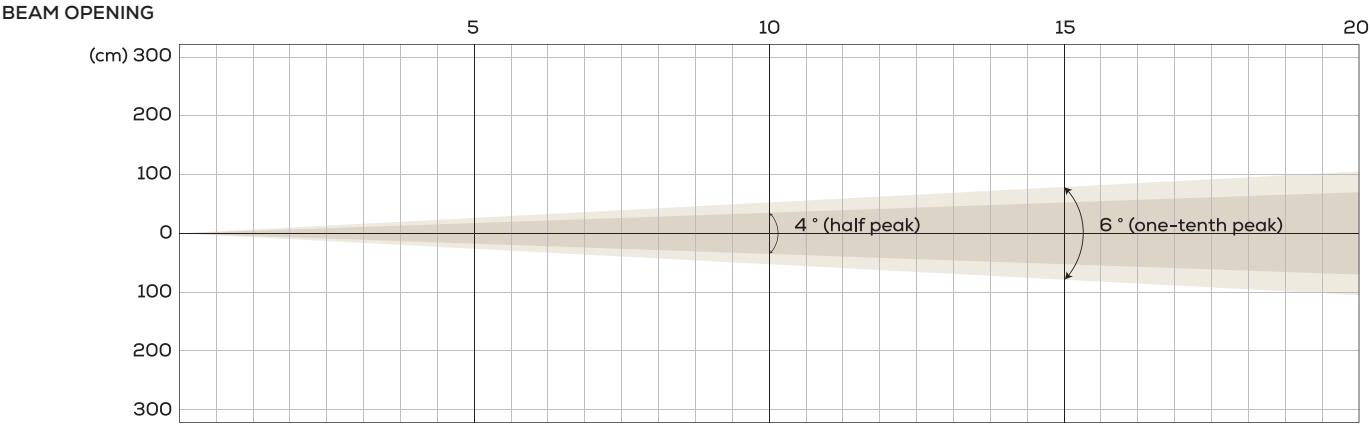

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	81,264	0.35	20,316	0.7	9,029	1.05	5,079	1.4
		0.52		1.05		1.57		2.1


MIDDLE ZOOM

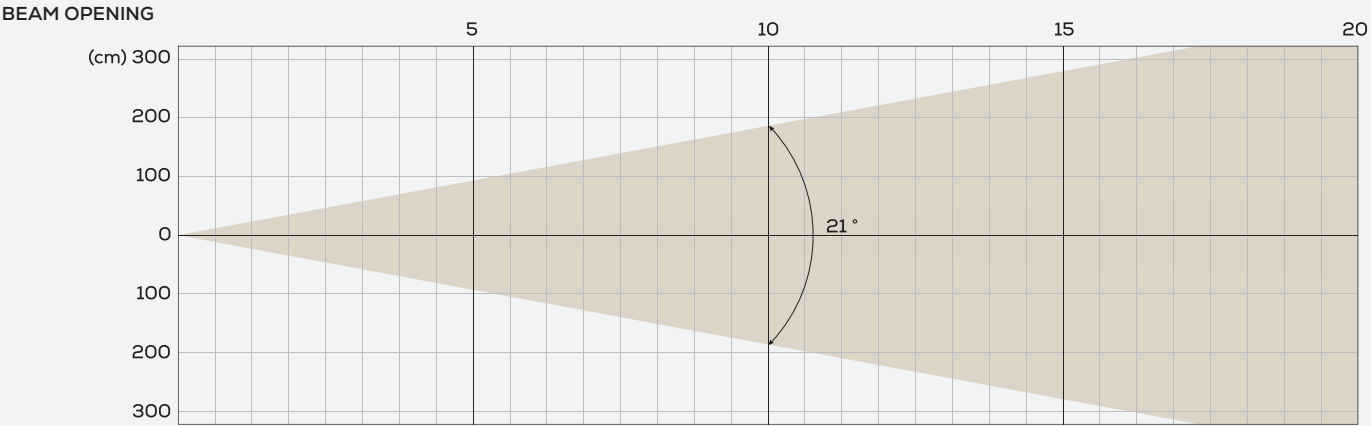

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	16,266	1.85	4,067	3.71	1,807	5.56	1,017	7.41

MAX ZOOM

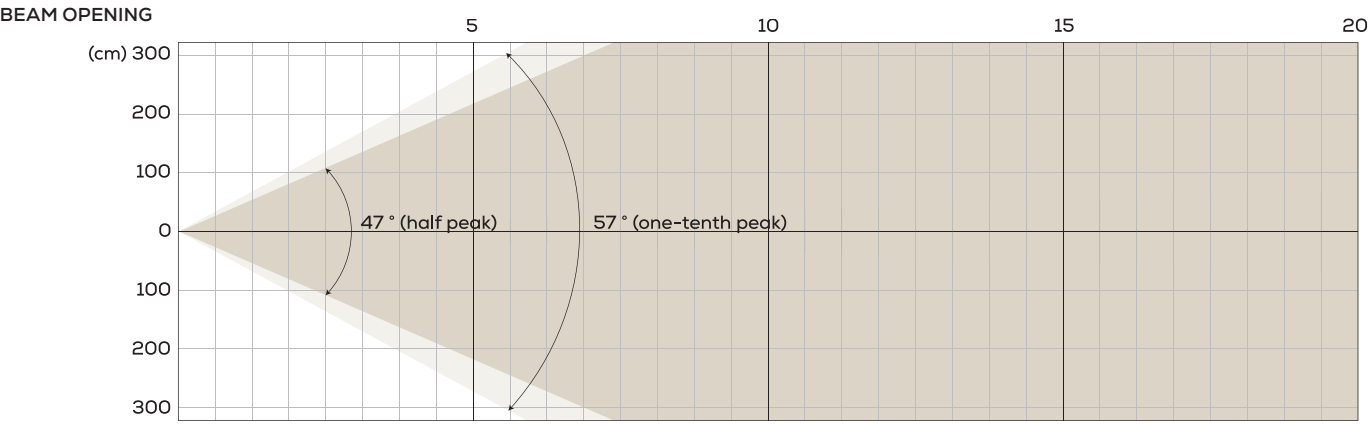


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	2,467	4.35	617	8.7	274	13.04	154	17.39
		5.43		10.86		16.29		21.72

STAGE MODE: PHOTOMETRIC DETAIL


MIN ZOOM

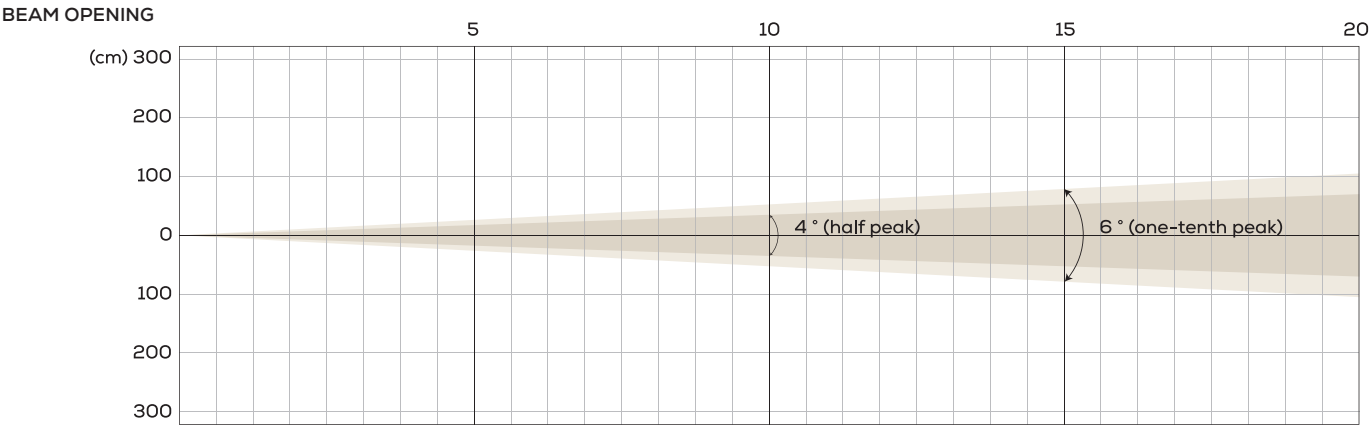

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	87,814	0.35 0.52	21,954	0.7 1.05	9,757	1.05 1.57	5,488	1.4 2.1


MIDDLE ZOOM

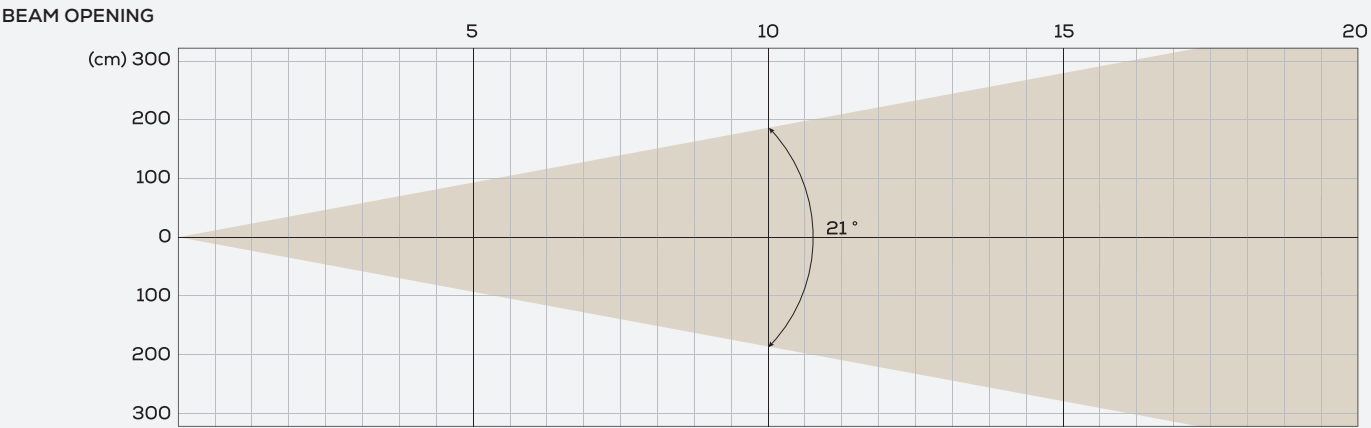

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	17,459	1.85	4,365	3.71	1,940	5.56	1,091	7.41

MAX ZOOM

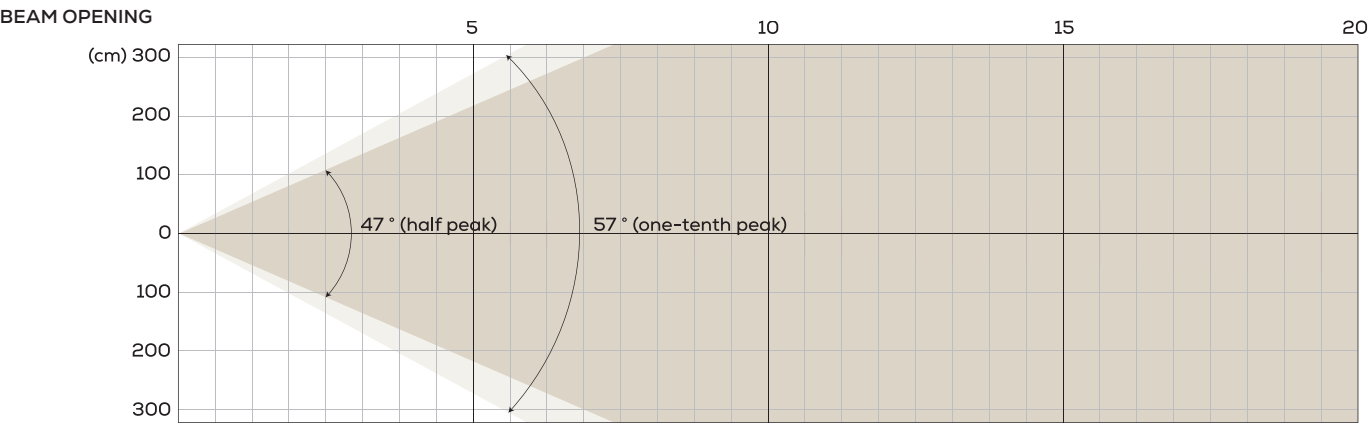


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	2,517	4.35 5.43	629	8.7 10.86	280	13.04 16.29	157	17.39 21.72

SILENCE MODE: PHOTOMETRIC DETAIL


MIN ZOOM

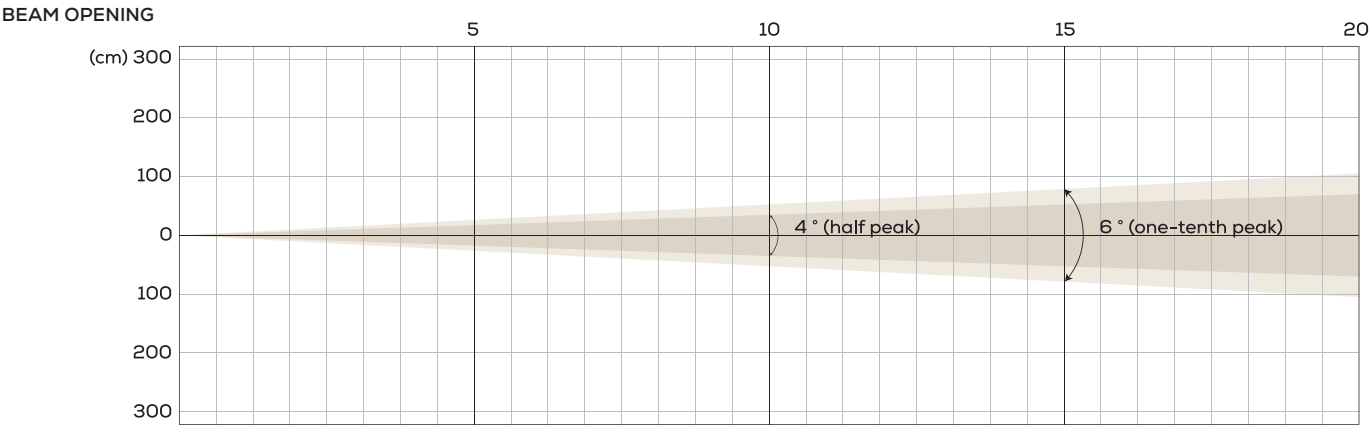

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	65,451	0.35	16,363	0.7	7,272	1.05	4,090	1.4
		0.52		1.05		1.57		2.1


MIDDLE ZOOM

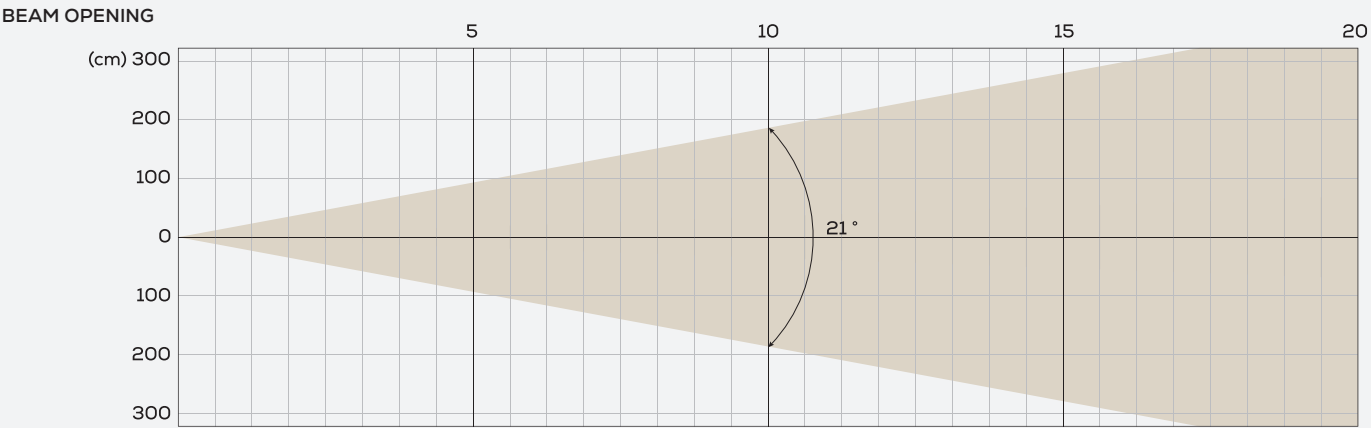

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	12,980	1.85	3,245	3.71	1,442	5.56	811	7.41

MAX ZOOM

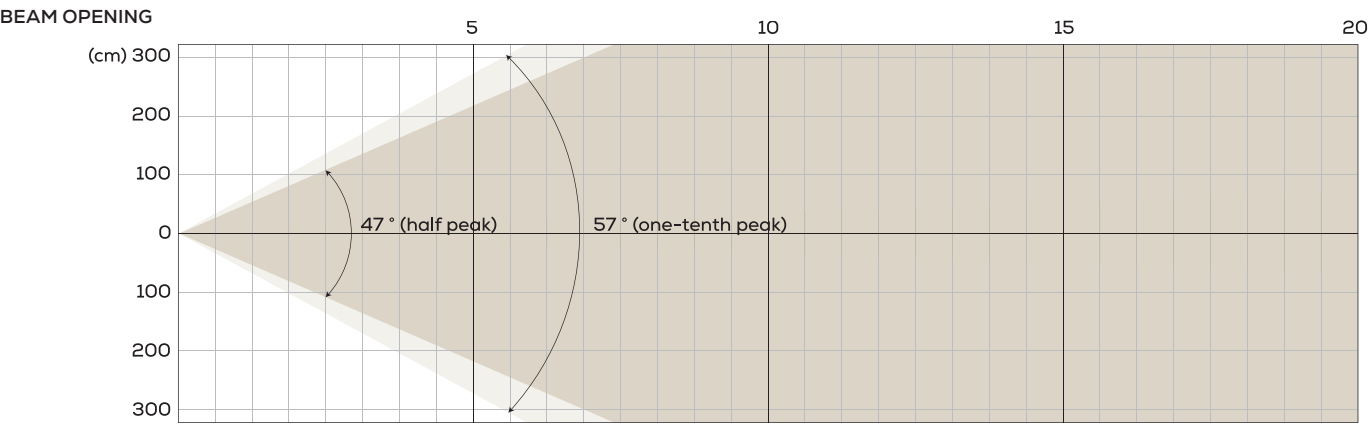


INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	1,875	4.35	469	8.7	208	13.04	117	17.39
		5.43		10.86		16.29		21.72

SUPER SILENCE MODE: PHOTOMETRIC DETAIL


MIN ZOOM

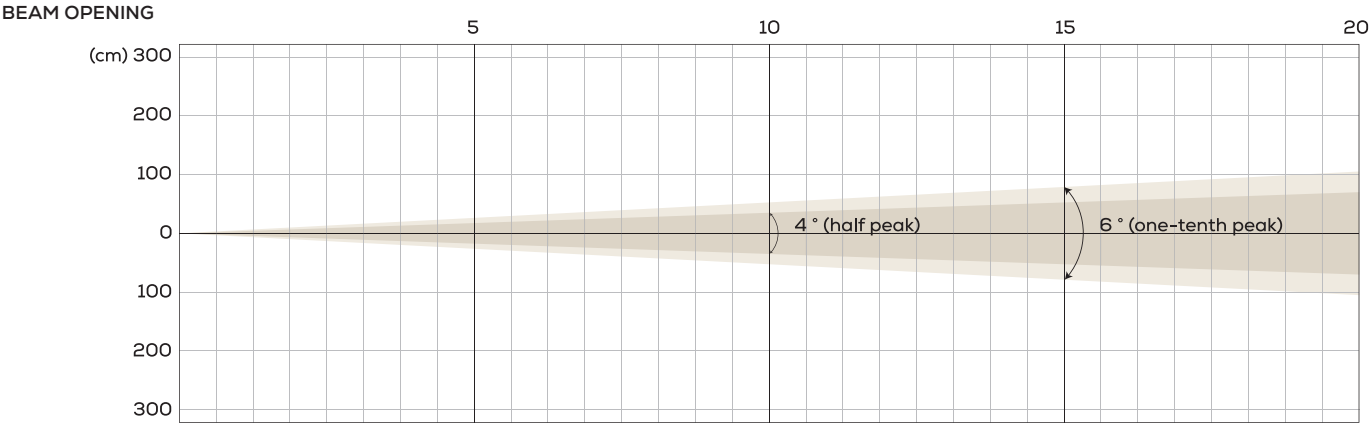

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	44,919	0.35	11,229	0.7	4,990	1.05	2,808	1.4
		0.52		1.05		1.57		2.1


MIDDLE ZOOM

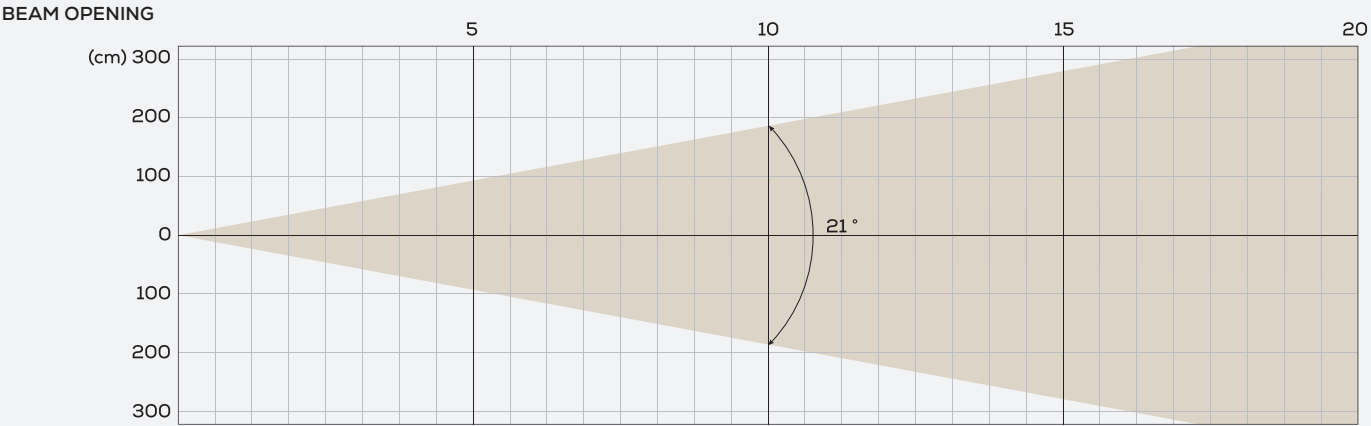

INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
White	9,103	1.85	2,276	3.71	1,011	5.56	569	7.41


MAX ZOOM

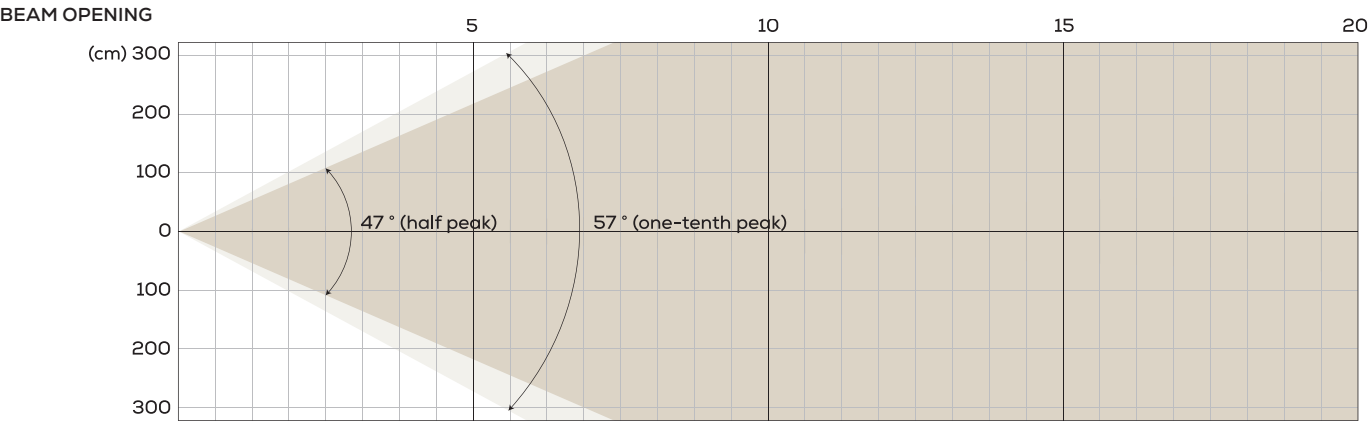



INTENSITY

Distance (m)	5		10		15		20	
unit	Lux	Diameter	Lux	Diameter	Lux	Diameter	Lux	Diameter
Half peak/ One-tenth peak	1,306	4.35	326	8.7	145	13.04	82	17.39
		5.43		10.86		16.29		21.72


COLOUR PARAMETERS

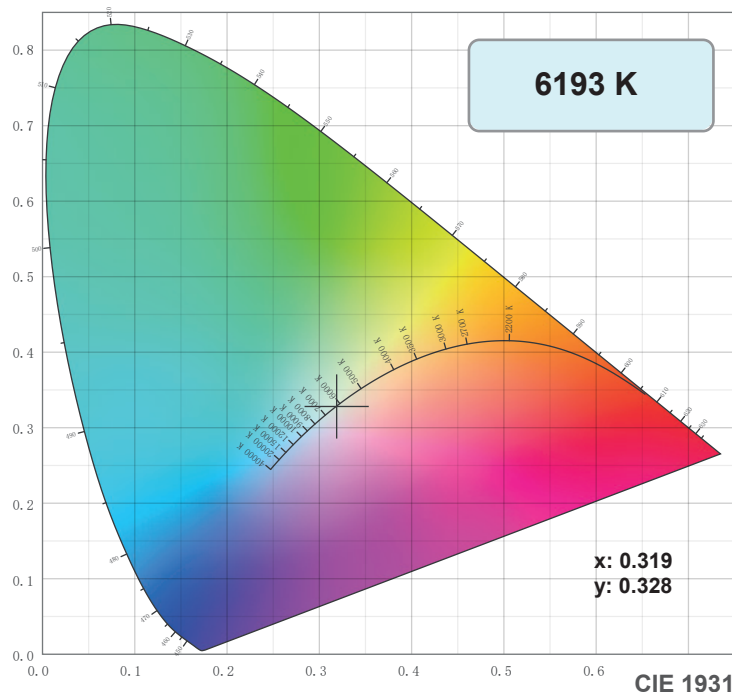

TM-30: 70.8

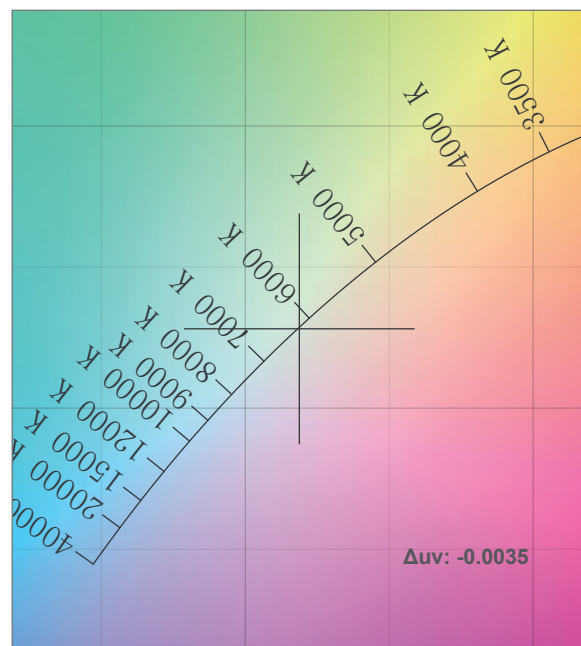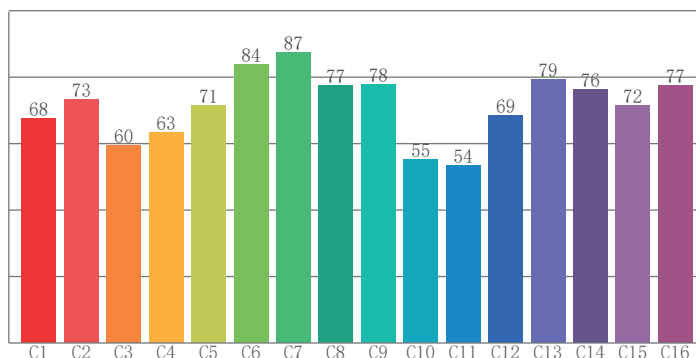

CRI: 71.2 (R1-R8)

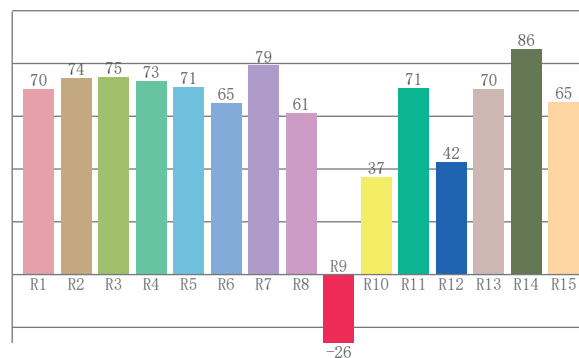

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
70.3	74.5	74.9	73.4	71.1	64.9	79.2	61.2	-25.9	37.0	70.7	42.5	70.2	85.6	65.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
67.6	73.3	59.5	63.3	71.5	83.9	87.4	77.5	77.8	55.1	53.5	68.5	79.4	76.2	71.6	77.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.0	91.1	59.0	52.8	65.6	70.8	76.0	85.9	86.6	68.0	61.6	63.9	67.9	57.7	67.1

CQS: 68.3

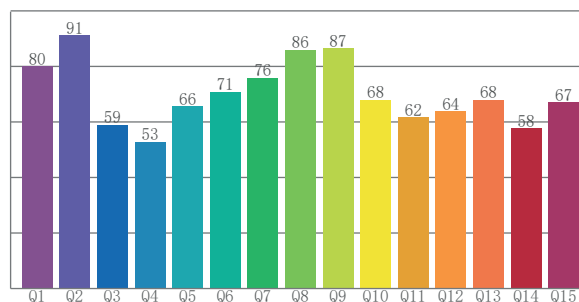

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6193 K	71.2	-25.9	70.8	94.6	68.3	0.319	0.328	0.202	0.312	-0.0035

TM-30







Rf 70.8

Fidelity index Rf







Rg 94.6

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	68	-18%	-4%
2	73	-13%	10%
3	60	-7%	23%
4	63	4%	23%
5	71	13%	14%
6	84	10%	-2%
7	87	0%	-8%
8	77	-10%	-9%
9	78	-19%	5%
10	55	-15%	23%
11	54	-4%	29%
12	69	5%	21%
13	79	14%	8%
14	76	12%	-5%
15	72	9%	-24%
16	77	-5%	-13%

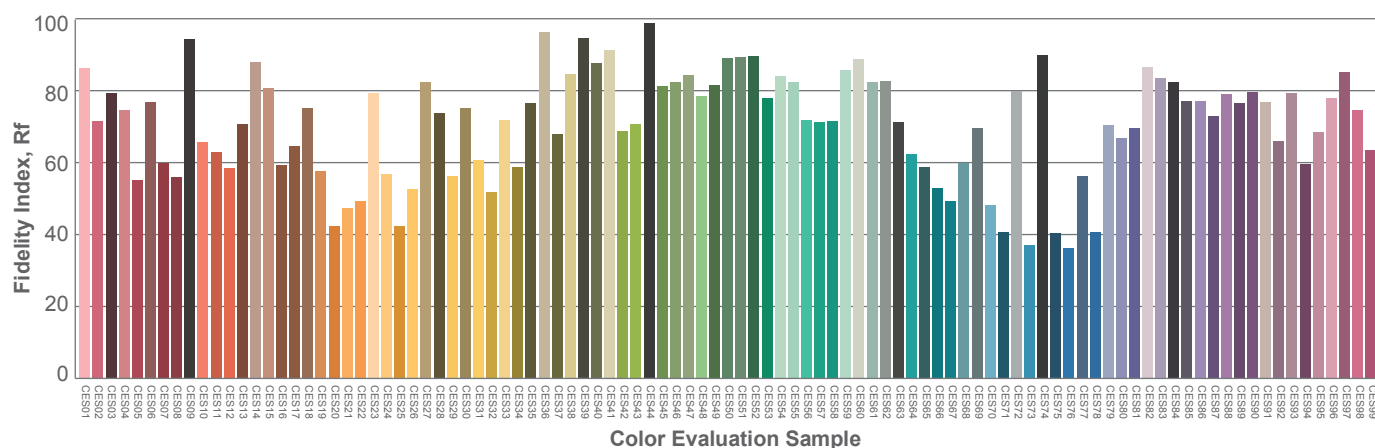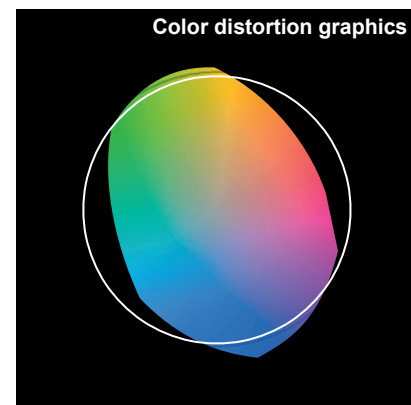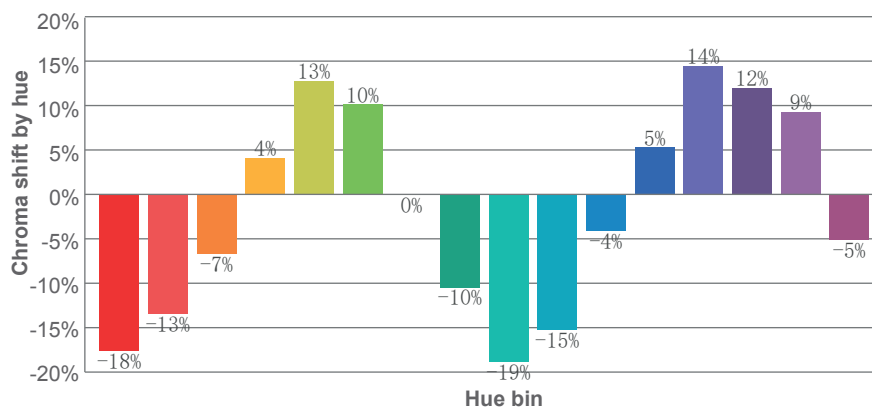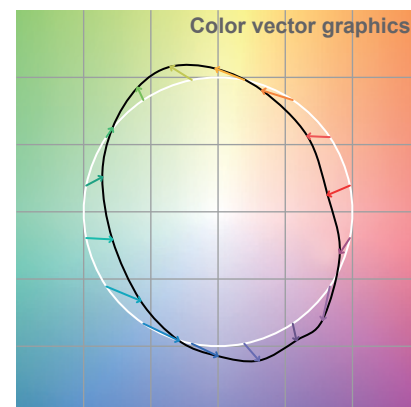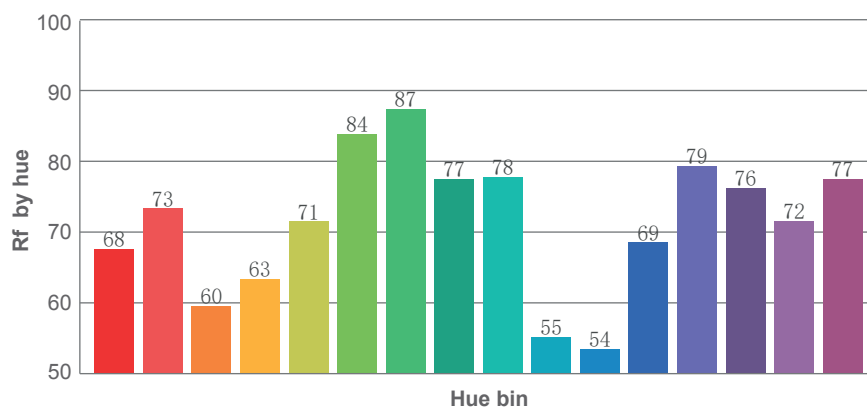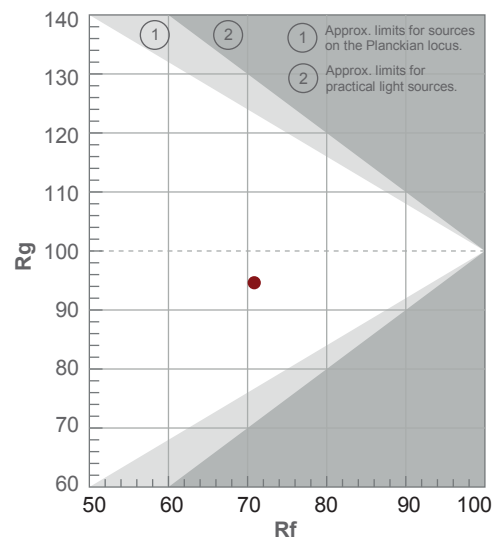

TLCI-48

					
Dark skin	Light skin	Blue sky	Foliage	Blue flower	Bluish green
					
Orange	Purplish blue	Moderate red	Purple	Yellow green	Orange yellow
					
Blue	Green	Red	Yellow	Magenta	Cyan
					
White 90.01%	Neutral 8, 59.1%	Neutral 6.5, 36.2%	Neutral 5, 19.77%	Neutral 3.5, 9%	Black 3.13%

 DISCLAIMER

Errors and omissions for all information given in this specification sheet are possible. All information is subject to change without prior notice.