

ARES IP

XP 500 BEAM IP



Light Source

PHILIPS MSD Platinum 19R LL

Total Lumen Output of Fixture

10,500 lumens

Diameter of Frontal Lens

200 mm

Beam Angle

1.3°

Protection Rating

IP66

ACME

ARES IP



Main Features

Light Source: PHILIPS MSD Platinum 19R LL

200 mm diameter front lens

Beam Angle: 1.3°

Total Lumen Output of Fixture: 10,500 lumens

Color Temperature Output of Fixture: 6,700K

1 Static Gobo Wheel:

10 gobos and 3 effect gobos, plus open

1 Color Wheel: 13 colors + CRI, plus open, with rainbow effect

1 FX Wheel:

Effect 1: 3 gobos, plus open, overlapping with static gobo wheel

Effect 2: 2 diffuser filters can effectively improve the uniformity of the beam spot

Linear CMY color mixing

Variable CTO ranging from 3,200K-6,500K

4 Prisms:

1 x 6-facet linear prism, 1 x 8-facet circular prism,


1 x 24-facet circular prism, 1 x 48-facet circular prism.

The 6-facet linear prism or 8-facet circular prism can be rotated and overlaid with the 24-facet or 48-facet circular prism in both directions.

1 combinable frost filter

IP66 rated

Technical Specifications

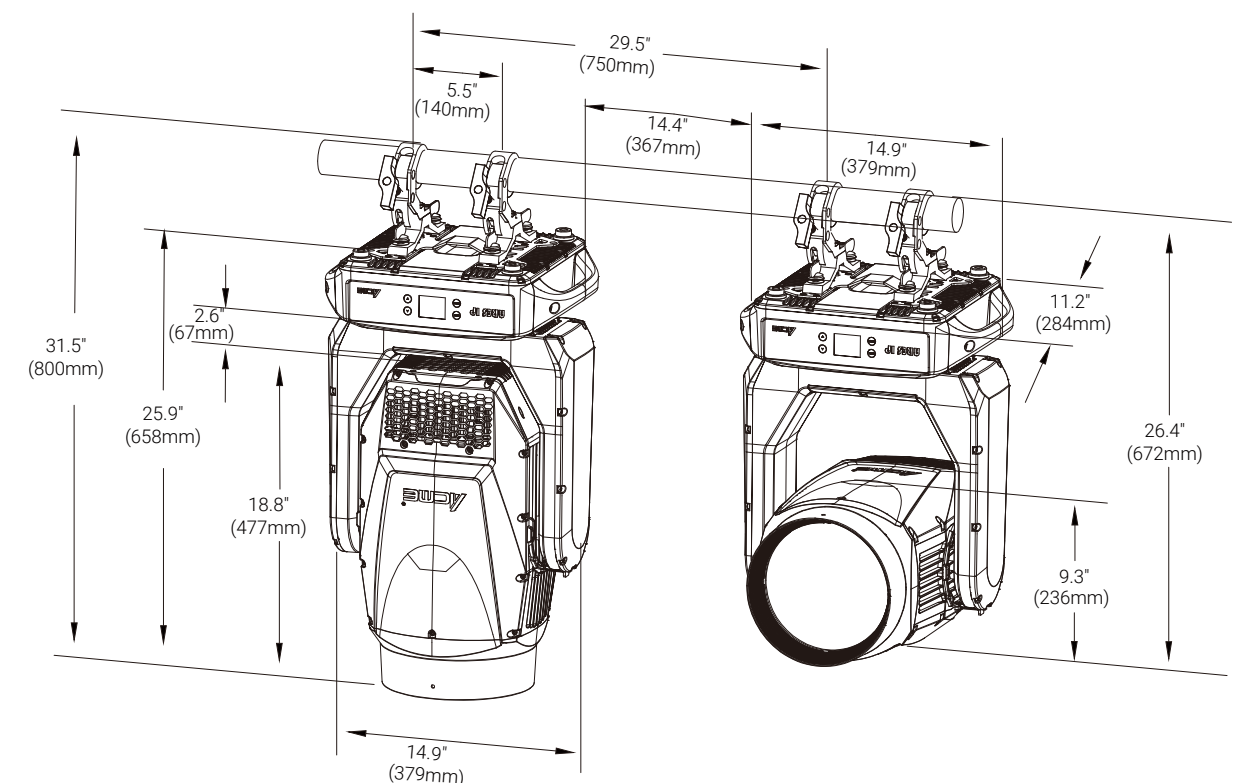

Light Source


- Light Source: PHILIPS MSD Platinum 19R LL
- Color Temperature Output of Fixture: 6,700K
- Total Lumen Output of Fixture: 10,500 lumens
- Life Expectancy: 5,000 hours*

*Source manufacturer specification

Optical System

- Diameter of Frontal Lens: 200 mm
- Beam Angle: 1.3°

Prism / Frost Filter / Diffuser Filter

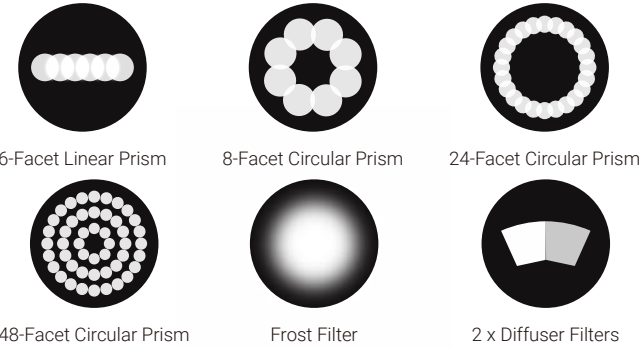

Colors


- Linear CMY color mixing



- Variable CTO: 3,200-6,500K




- 1 Color Wheel:
13 colors + CRI, plus open, with rainbow effect

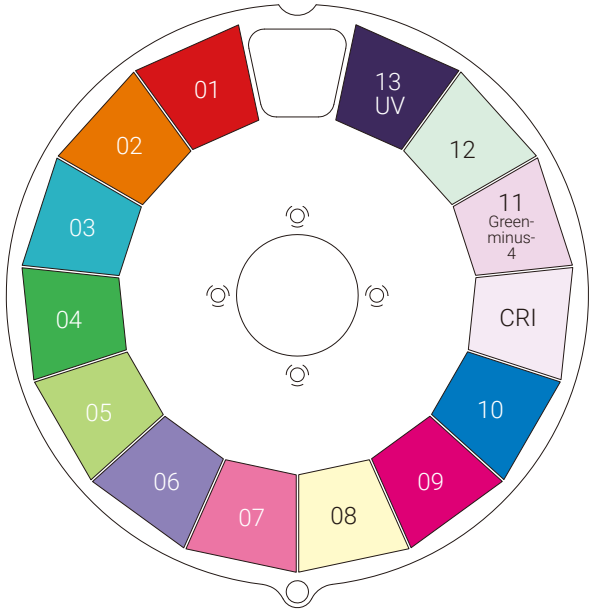

Color Wheel

Static Gobos


- 1 Static Gobo Wheel:
10 gobos and 3 effect gobos, plus open

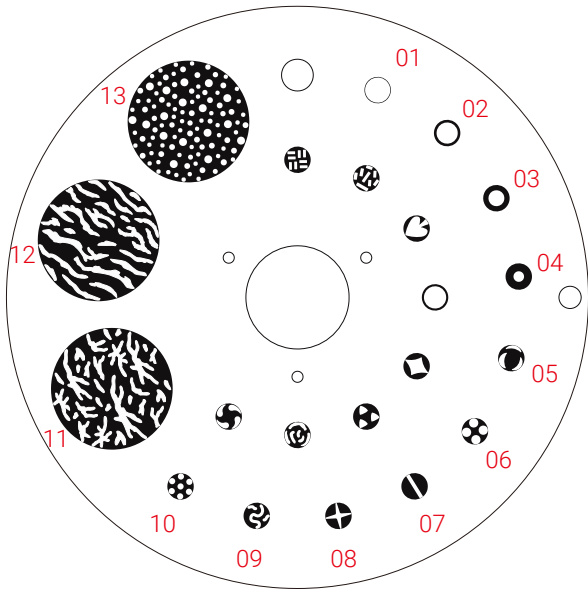

Static Gobo Wheel

FX Wheel

- 1 FX Wheel:
Effect 1: 3 gobos, plus open, overlapping with static gobo wheel
Effect 2: 2 diffuser filters can effectively improve the uniformity of the beam spot

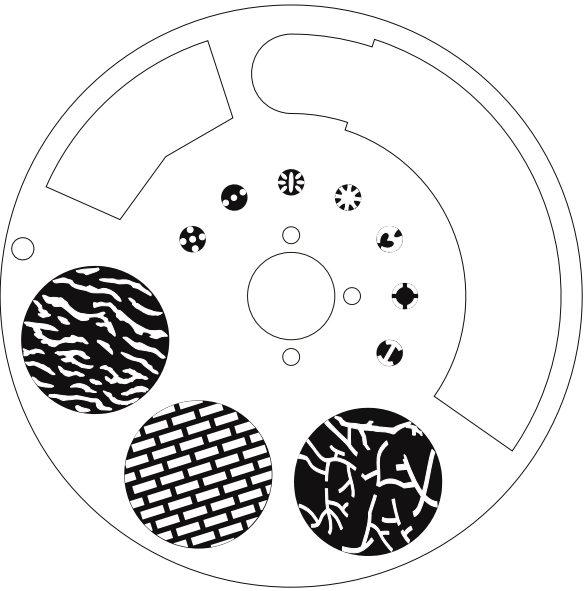

FX Wheel

Pan & Tilt

- Pan Movement: 540°
- Tilt Movement: 260°
- Automatic Pan/Tilt position correction
- Moving-head operated with 16 bit resolution

Control

- 4 touch button control panel
- Display: LCD Display
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol modes: 1
- Control Channels: 24
- Firmware Upgrade: Upgrade via DMX link or USB disk

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 615W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector, USB connector

Physical Information

- Fixture Dimensions:
380 x 284 x 659 mm (15.0" x 11.2" x 25.9")
- Weight: 43.5 kg (95.9 lbs)

Packing Information

- Flight Case Dimensions:
1,220 x 610 x 805 mm (48.0" x 24.0" x 31.7")
- Weight:
Standard:
G.W.: 125.0 kg (275.6 lbs) (two-pack loader case)
North American Standard:
G.W.: 131.4 kg (289.7 lbs) (two-pack loader case)
Carton Dimensions:
610 x 490 x 675 mm (24.0" x 19.3" x 26.6")
- Weight:
G.W.: 36.5 kg (80.5 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 75°C
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 omega brackets
- Safety cable attachment point


Included Items

- Digital user manual
- Power cable
- 2 omega brackets (3002003003)

Optional Accessories (With Order Code)

- Flight Case:
Standard : Two-pack loader case (63583575)
North American Standard : Two-pack loader case (63583567)
- Clamps: C-250B (2060001632-B), C-150B (2060001625-C)
- Safety Cable: SW-05 (2060001603-A)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)

Photometric (Images)

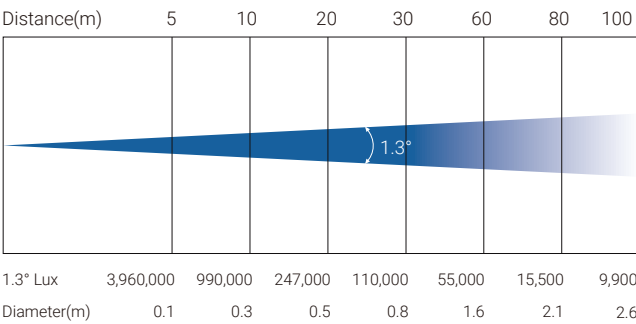

Specifications subject to change without notice.
06/14/2025