

BLINDER LINE 10 IP

BLB 10 IP



Light Source

10 x 150W RGBAW LED

Beam Angle

23°, 31°, 54° (W)

24°, 32°, 54° (RGBA)

Field Angle

47°, 74°, 130° (W)

49°, 79°, 131° (RGBA)

Total Lumen Output of Fixture

26,300 lumens

Protection Rating

IP66

Acme

BLINDER LINE 10 IP



Main Features

LED Engine comprised of 10, 150-Watt RGBAW LEDs

Individual pixel control and built-in color macro effects

DMX Controllable Smart Glass technology:

Patent No. :

CN216010577U

US11698183B1

DE202023101966U1

FR3134870B3

Hidden, accessories-free interlocking system for combining units


IP66 rated

Tungsten emulation during dimming

Outstanding strobe effect

Smooth dimming 0-100%

Technical Specifications

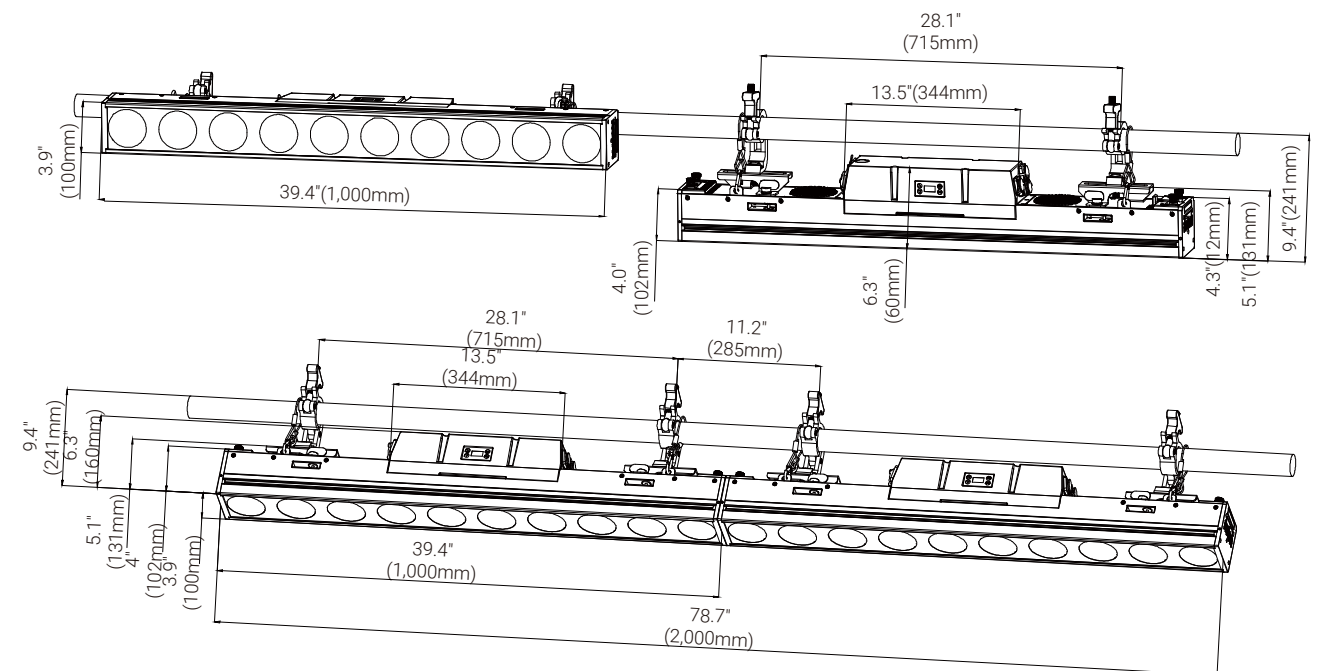

Light Source

- Light Source: 10 x 150W RGBAW LED Engine
- Total Lumen Output of Fixture: 26,300 lumens
- Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical System

- Beam Angle:
23°, 31°, 54° (W)
24°, 32°, 54° (RGBA)
- Field Angle:
47°, 74°, 130° (W)
49°, 79°, 131° (RGBA)

Other Effects

- Patented Smart Glass Technology for frost effects
- Smooth dimming 0-100%
- Patented Smart Glass Technology for frost effects

Control

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes: 2
- Control Channels: 14/55
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 600W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 5-pin waterproof XLR, RJ45 connector

Physical Information

- Fixture Dimensions:
1,000 x 103 x 158.5 mm (39.4" x 4.0"x 6.2")
- Weight: 13.6 kg (30.0 lbs)

Packing Information

- Flight Case Dimensions 1:
1,220 x 610 x 555 mm (48" x 24" x 21.9")
Weight: 107.0 kg (235.9 lbs) (four-pack loader case)
- Flight Case Dimensions 2:
1,220 x 610 x 530 mm (48.0" x 24.0" x 33.5")
Weight: 107.0 kg (235.9 lbs) (four-pack loader case)
- Carton Dimensions:
1,105 x 285 x 200 mm (43.5" x 11.2" x 7.9")
Weight: 16.0 kg (35.3 lbs)(one-pack loader carton)

Work environment



- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 70°C
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- Vertical Stand: Mounted to one base stand (sold separately), When installed at a tilt, stand single unit only, no other fixtures may be connected. When stand vertically, a maximum of 2 fixtures may be connected
- Horizontal: Utilizing two omega brackets (supplied) and two clamps (by others), there is no limit to the number of fixtures in the horizontal direction, and a maximum of 5 fixtures may be connected in the vertical direction
- Vertical: Using one hanging bracket (sold separately) with one clamp (by others), a maximum of 3 fixtures may be connected
- Floor: Utilizing two omega brackets (supplied) and two floor stands (sold separately)
- Safety cable attachment point

Included Items

- Digital user manual
- Power cable
- 2 omega brackets

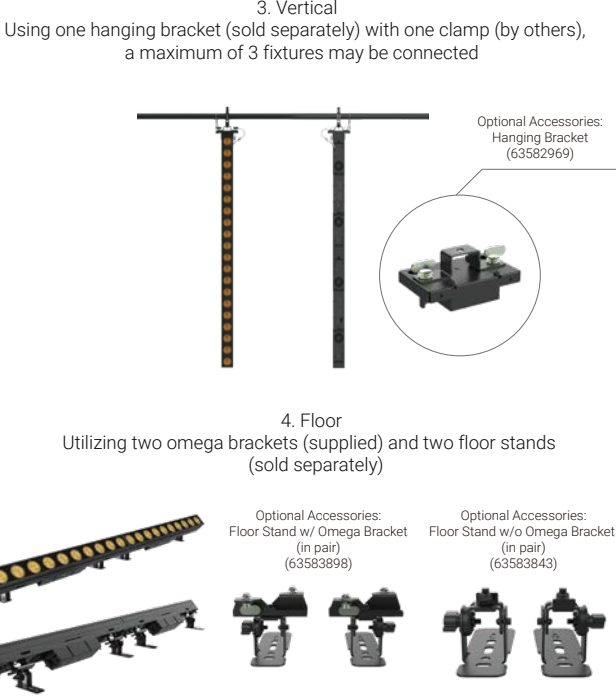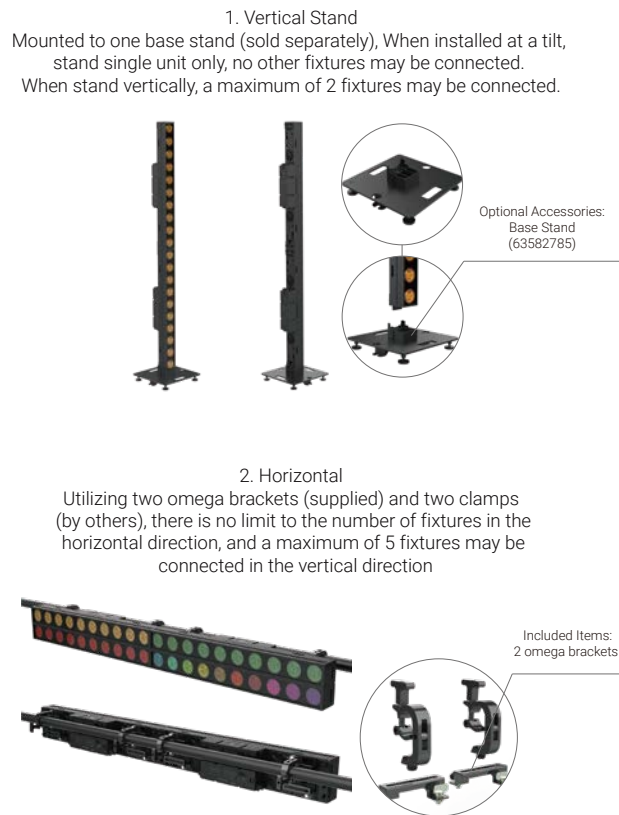


Optional Accessories (with item code)


- Flight Case 1
Standard : Four-pack loader case (63583274)
- Flight Case 2
Standard : Eight-pack loader case (63583576)
North American Standard : Eight-pack loader case (63583041)
- Clamp : C-250B (2060001632-B)
- Safety Cable: SW-05 (2060001603-A)
- Signal Cable: 3-pin waterproof signal cable (3017013468) or 5-pin waterproof signal cable (3017013473)
- Hanging Bracket: 63582969
- Base Stand: 63582785
- Customized Floor Stand w/ Omega Bracket: 63583898 (in pair)
- Customized Floor Stand w/o Omega Bracket: 63583843 (in pair)

Photometric (Images)


Beam Angle (W):

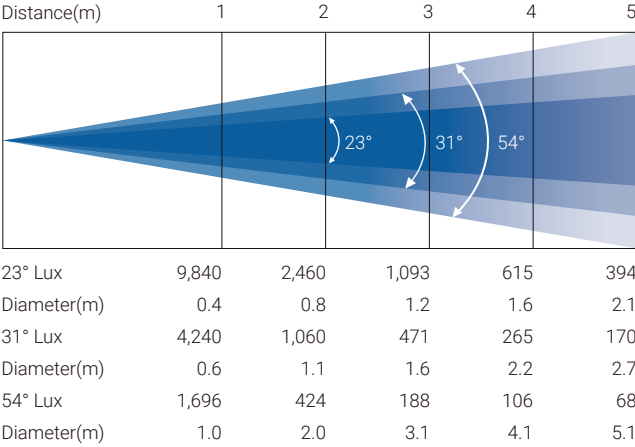


Beam Angle (RGBA):

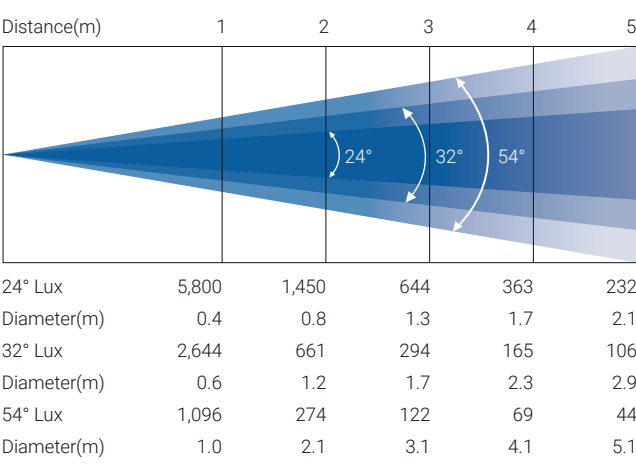

Field Angle (W):

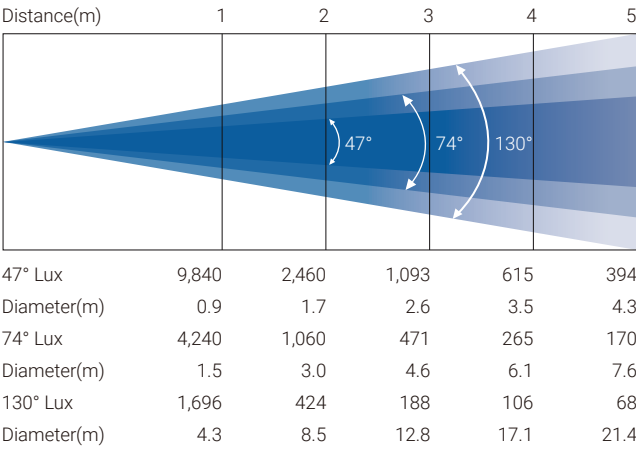

Field Angle (RGBA):

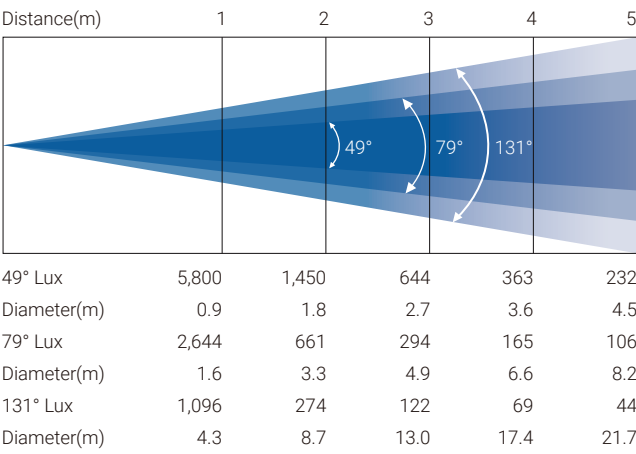

Specifications subject to change without notice.
08/22/2025