

LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET



Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: www.acmelighting.com Email: sales@acmelighting.com

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 03/07/2026

Acme®

LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

FIXTURE OVERVIEW

- The ACME **LINEFORCE 5 IP** is a compact, half-meter linear effect light that packs the same outstanding performance as the LINEFORCE 10 IP in a smaller form. The LINEFORCE series is a game-changing innovation in the lighting market, integrating cyclorama light, blinder, bar light, and footlight all in one.
- Equipped with five powerful 120W RGBWAC+UV LEDs, the **LINEFORCE 5 IP** offers a multi-spectrum output from vivid hues to mysterious UV effects. What sets it apart is ACME's patented electronic frost system, divided into four linear individually controllable zones. The frost zones enable the user to create multiple combinations, allowing for seamless transitions between different beam angles to create soft looks. With all frost zones activated, you can achieve an ultra-wide wash that covers large areas.
- Using the included floor stands, it can rotate from 0-90°, making it a versatile footlight. Whether delivering crisp beams or soft washes, the fixture adapts effortlessly to any creative setup.
- Lightweight, highly versatile, and IP66-rated, the **LINEFORCE 5 IP** is designed to elevate creative lighting designs for any applications. Redefining the possibilities of linear lighting.



FEATURE HIGHLIGHTS

- LED engine comprised of 5 x 120W RGBWAC+UV LEDs
- Beam Angle: 14°-55°
- Field Angle: 29°-136°
- Fixture Luminous Output: 8,470 lumens
- Variable CTO ranging from 2,500K-8,000K
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100% (4 user selectable dimming curves)
- DMX controllable Smart Glass technology
Patent No.:
CN216010577U US11698183B1
DE202023101966U1 FR3134870B3
- The electronic frost system was divided into four controllable zones, allowing multiple combinations
- Tungsten emulation
- Individual pixel control and built-in color macro effects
- Uniform wash effect
- Integrated interlocking system for combining units
- Three fan modes to meet the noise requirements of each scenario
- IP66 rated

LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

TECHNICAL SPECIFICATIONS

Light Source

- Light Source: 5 x 120W RGBWAC+UV LEDs
- Life Expectancy: 20,000 hours*
- *Source manufacturer specification

Photometric Data

- Fixture Luminous Output: 8,470 lumens
- CCT: 8,000K (+/- 200K)
- CRI: ≥92
- TM-30 Rf (IES TM-30-15 Fidelity Index): 68
- TM-30 Rg (IES TM-30-15 Fidelity Index): 128
- TLCI: 77

Optical System

- Beam Angle: 14°-55°
- Field Angle: 29°-136°
- DMX controllable Smart Glass technology
- Patent No.:
CN216010577U
US11698183B1
DE202023101966U1
FR3134870B3

Control & Program

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX, RDM, Art-Net, sACN
- Setting and Addressing: Display menu, RDM
- DMX Modes: 8
- DMX Channels: 10/11/16/17/19/20/44/46
- Firmware Upgrade: Upgrade via DMX link

Color Correction

- Linear CTO Color Correction: 2,500K-8,000K

Electrical

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 325W
- Power In/Out: Waterproof power connector in/out
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector

Physical

- Weight: 8.6 kg (19.0 lbs)
- Width: 500 mm (19.7")
- Depth: 100 mm (3.9")
- Height: 162 mm (6.4")

Construction

- Housing: Aluminum-magnesium alloy
- Color: Black
- Protection Rating: IP66

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -20°C
- Maximum Surface Temperature: 70°C

Acoustic Data

- Standard Mode: Noise Level <45dB

Installation

- Horizontal or vertical mounting
- Universal working position
- Horizontal: Utilizing two brackets (supplied) and two clamps (by others), there is no limit to the number of fixtures in the horizontal direction, and a maximum of 6 fixtures may be connected in the vertical direction
- Vertical: Using one hanging bracket (sold separately) with one clamp (by others), a maximum of 5 fixtures may be connected
- Vertical Stand: Mounted to one base stand (sold separately). When installed at a tilt, a maximum of 2 fixtures may be connected. When stand vertically, a maximum of 4 fixtures may be connected
- Floor: Utilizing two brackets (supplied) and two floor stands (supplied)
- Integrated interlocking system for combining units
- Safety cable attachment point

Approvals

- CE compliant
- UKCA compliant
- cETLus compliant



LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

Installation Diagram

1. Horizontal

Horizontal: Utilizing two brackets (supplied) and two clamps (by others), there is no limit to the number of fixtures in the horizontal direction, and a maximum of 6 fixtures may be connected in the vertical direction



2. Vertical

Vertical: Using one hanging bracket (sold separately) with one clamp (by others), a maximum of 5 fixtures may be connected




3. Vertical Stand

Mounted to one base stand (sold separately). When installed at a tilt, a maximum of 2 fixtures may be connected. When stand vertically, a maximum of 4 fixtures may be connected



4. Floor

Utilizing two brackets (supplied) and two floor stands (supplied)

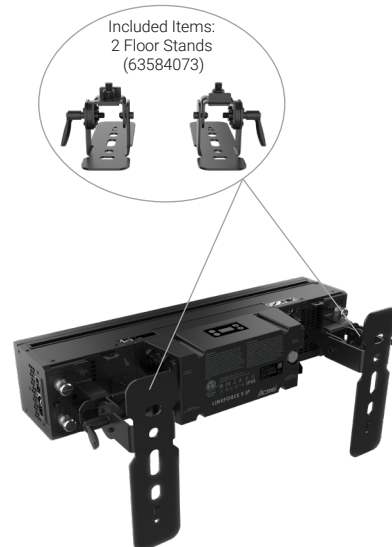

LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

INCLUDED ITEMS

Included Items

- Digital user manual
- Power cable
- 2 brackets
- 2 floor stands (63584073)



2 floor stands


ORDERING INFORMATION

Optional Accessories (With Order Code)

- Flight Case:
- Standard: Twelve-pack loader case (63584291)
- North American Standard: : TBD
- Hanging Bracket: 63582969
- Base Stand: 63582785
- Glare Shield: 63584114
- Diffuser Filter (10°): 3005006478
- Diffuser Filter (40°x20°): 3005006477
- Signal Cable:
- 3-pin waterproof signal cable (3017013468) or
- 5-pin waterproof signal cable (3017013473)
- Safety Cable: SW-05 (2060001603-E)
- Clamp: C-250B (2060001632-B)

Carton Dimensions


- Width: 625 mm (24.6")
- Depth: 335 mm (13.2")
- Height: 230 mm (9.1")
- Weight:
- G.W.: 10.5 kg (23.2 lbs) (one-pack loader carton)



Hanging Bracket: 63582969



Base Stand: 63582785



Glare Shield: 63584114



SW-05: 2060001603-E



3-pin/5-pin waterproof
signal cable: 3017013468/3017013473



C-250B: 2060001632-B

LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

(STANDARD) FLIGHT CASE

APPLICABLE MODELS

- LINEFORCE 5 IP (CYC 5 IP)

ORDER CODE

- 63584291 LINEFORCE 5 IP (CYC 5 IP)

CASE WEIGHT

- 63 kg (139.0 lbs)

MEAS





- 1220 x 610 x 795 mm (48.0" x 24.0" x 31.3")

LOADING Q'TY

- Twelve-pack loader case

MAXIMUM STACKING

- 2 stacks

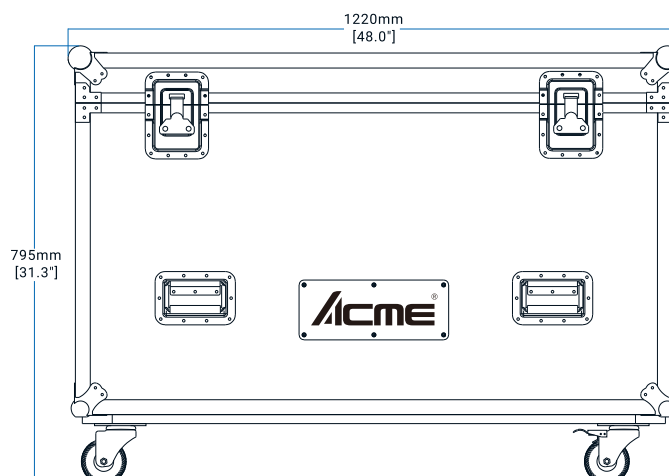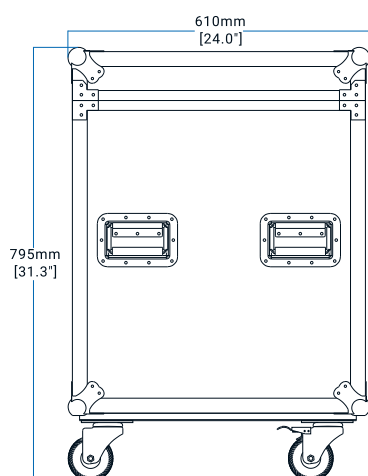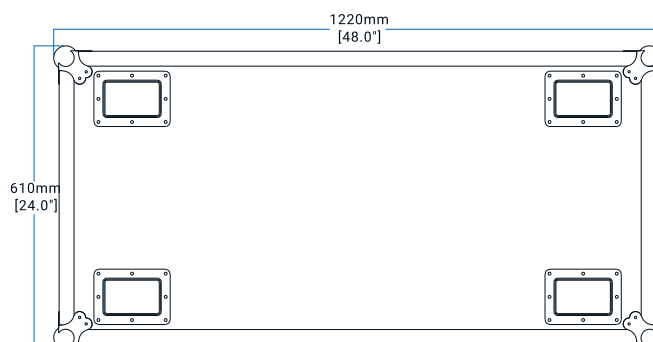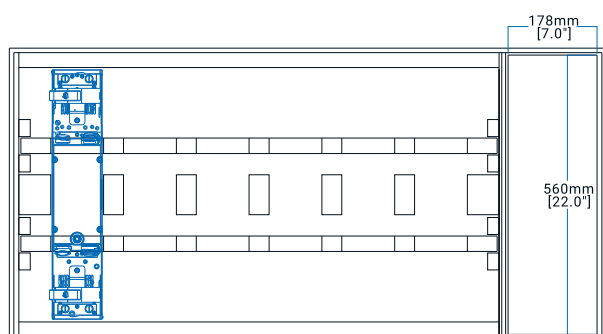

ACASE by ACME Version: 20251208-A

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: www.acmelighting.com Email: sales@acmelighting.com

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 03/07/2026


ACME®

LINEFORCE 5 IP


Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

DIMENSIONS

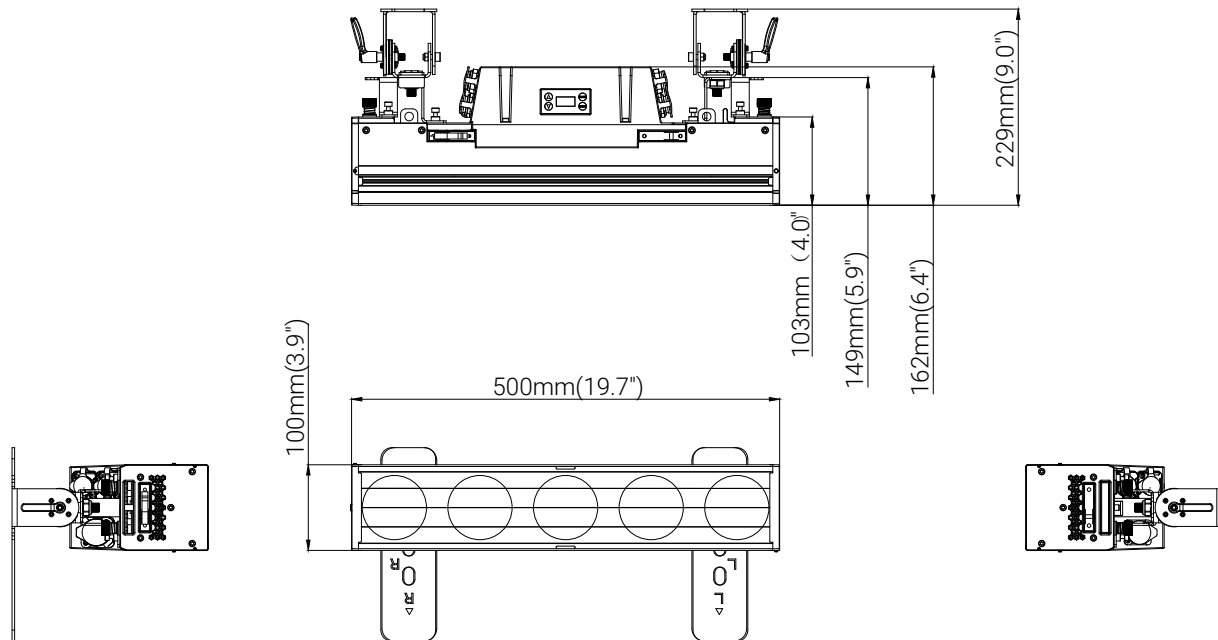

HANGING DIMENSIONS

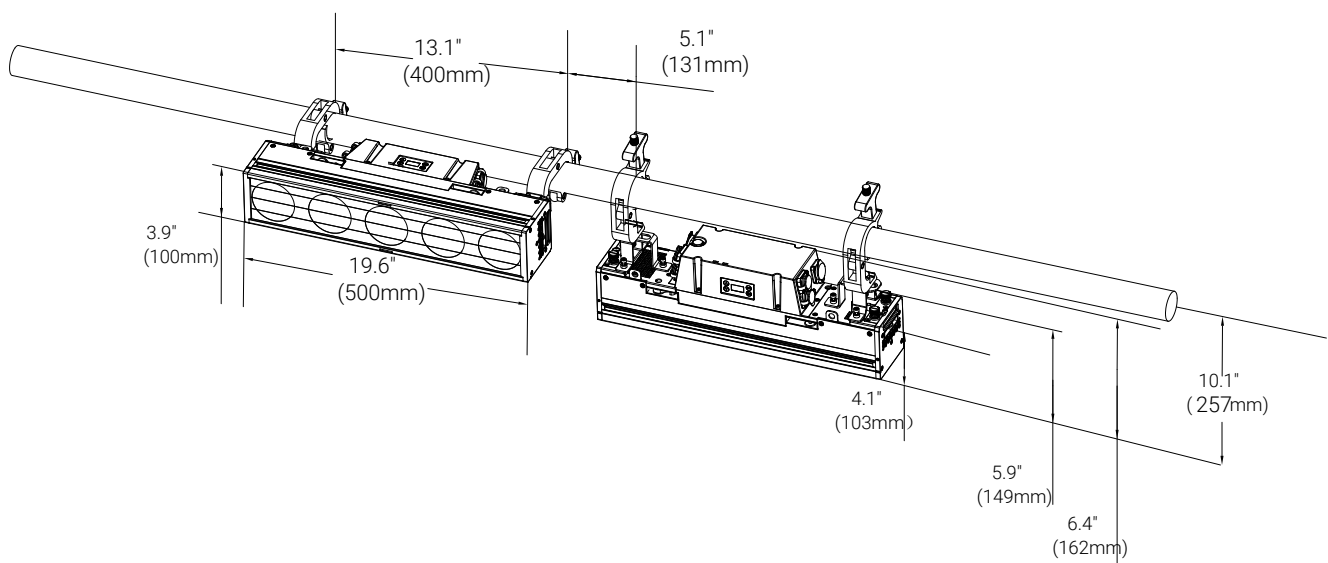

Foshan YiFeng Electric Industrial Co.,Ltd.

No.898, Gaoming Avenue East, Hecheng Blvd, Gaoming District, Foshan, Guangdong, China.

Web: www.acmelighting.com Email: sales@acmelighting.com

All rights reserved by Acme®. Features, specifications and appearance are subject to change without notice.

REV: 03/07/2026

Acme®


LINEFORCE 5 IP

Outdoor Linear Light with Multi-Spectrum Output

SPEC SHEET

PHOTOMETRIC

Beam Angle:

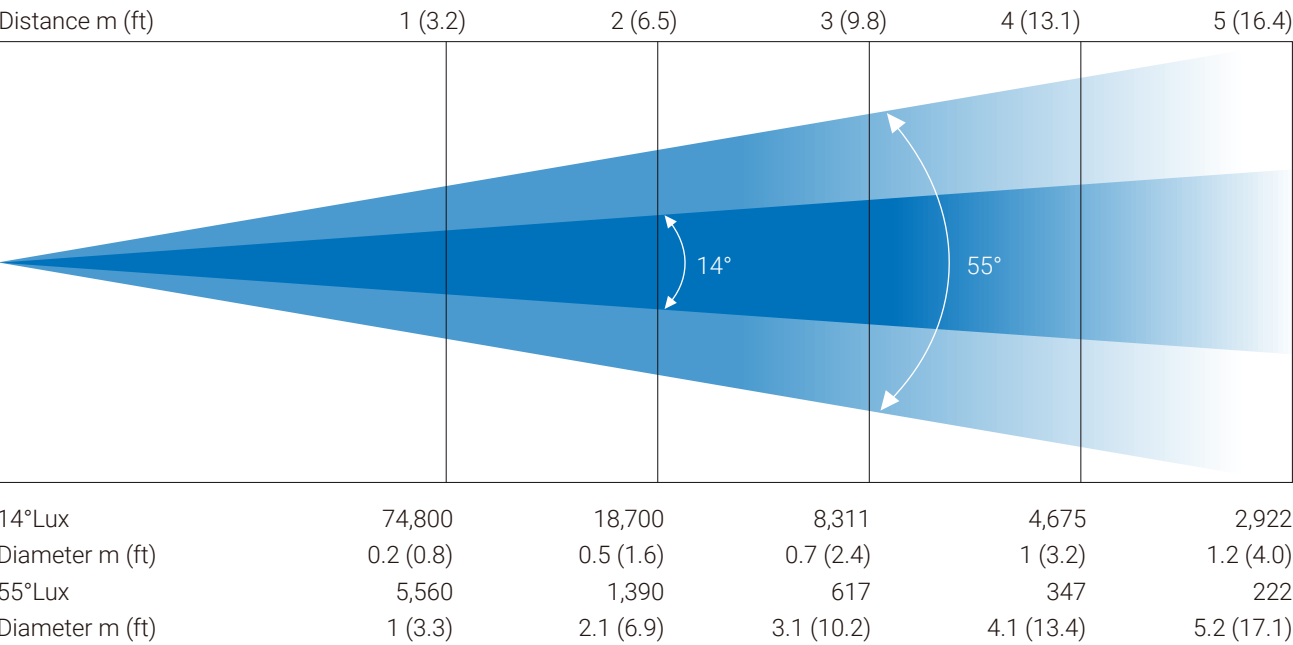

Field Angle:

