

STAGE PAR 100 COLOUR IP

LED-PAR100 RGBA IP



Light Source
1 x 120W RGBA LED module

Beam Angle
7°/11.5°/16°/20.5°/25°

Acme

STAGE PAR 100 COLOUR IP




Main Features

Light Source: 1 x 120W RGBA LED module
Outstanding color mixing effect
Total Lumen Output of Fixture: 1,913 lumens
Beam Angle: 7°/11.5°/16°/20.5°/25°

Ultra-high brightness, energy-saving replacement
for traditional 1,000W PAR and colored gels
Outstanding strobe effect with variable speed
Smooth dimming 0-100%
Flicker-free management
IIPX4 rated
Dust-proof and oil-proof design

Technical Specifications

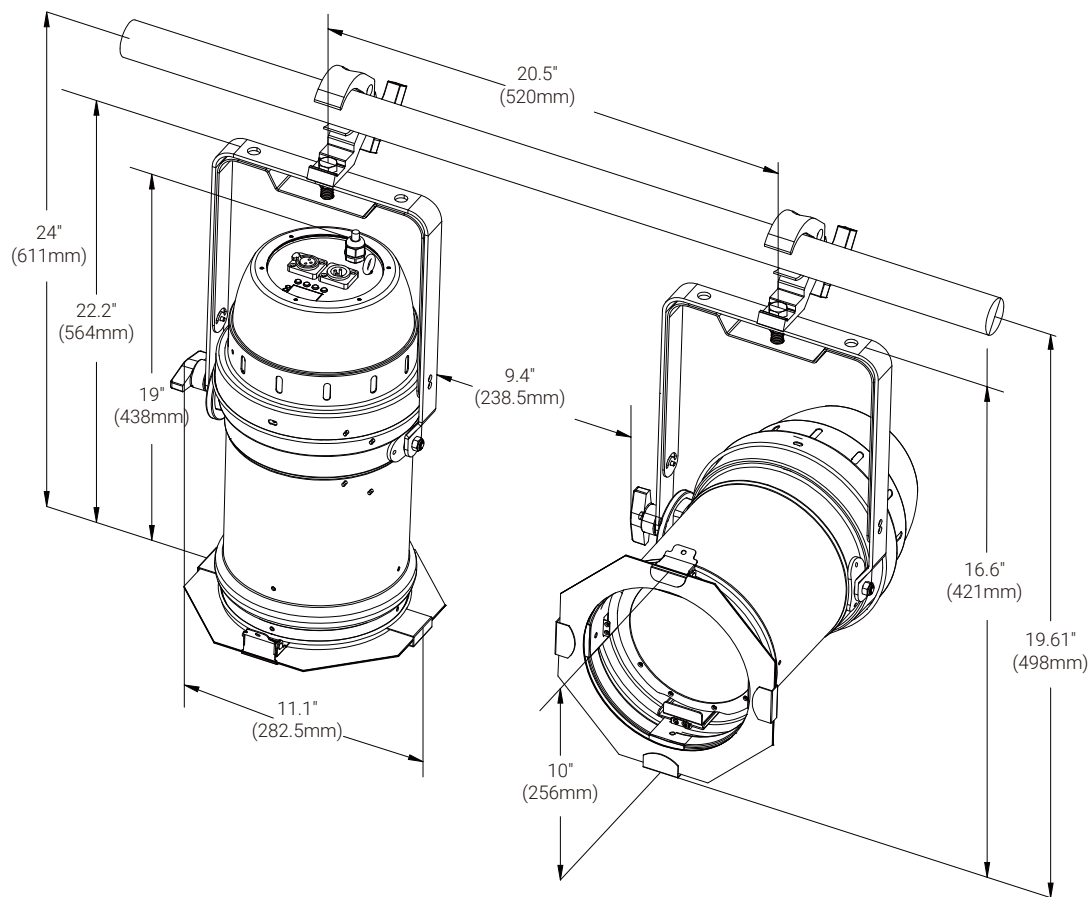



Light Source

- Light Source: 1 x 120W RGBA LED module
- Total Lumen Output of Fixture: 1,913 lumens
- Life Expectancy: 10,000 hours * manufacturer specification

Optical System

- Advanced optical system ensures clear, wide-range wash effect
- Beam Angle: 7°/11.5°/16°/20.5°/25°

Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%

Control

- 4 touch button control panel
- Protocols: DMX-512, RDM, Manual
- DMX Protocol Modes: 4
- Control Channels: 4/6/7/8
- Dimmer: 8 bit or 16 bit
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 110W
- Power In/Out: Power cord out
- Data In/Out: 3-pin or 5-pin waterproof XLR

Physical Information

- Fixture Dimensions:
256 x 283 x 564 mm (10.1" x 11.1" x 22.6")
Weight: 4.5 kg (9.9 lbs)

Work Environment


- Maximum Ambient Temperature: 40°C
- Maximum Surface Temperature: 65°C
- Minimum Operating Temperature: 0°C
- Protection Rating: IPX4

Installation

- Horizontal or vertical mounting
- Universal working position
- Supporting feet with 3 locking points
- Safety cable attachment point



Photometric (Images)

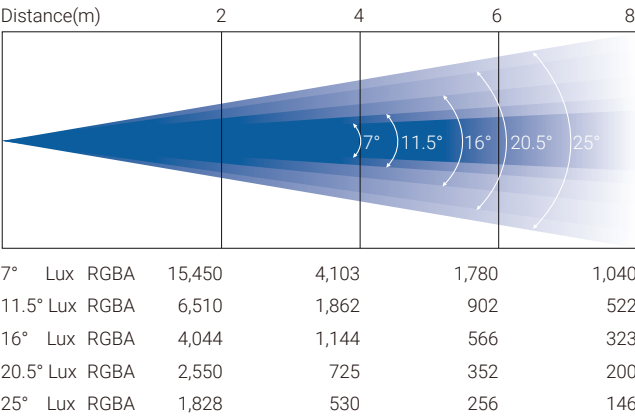

Specifications subject to change without notice.
11/05/2024