

STAGE PAR 100 IP

LED-PAR100 WW/CW IP



Light Source

1x 100W CW LED module (CW)
1x 100W WW LED module (WW)

Beam Angle

9°/15°/20°/25°/30°

Acme

STAGE PAR 100 IP CW/WW



Main Features

Light Source: 1 x 100W CW LED module (CW)
1 x 100W WW LED module (WW)

Color Temperature: 5,700K (CW)
3,000K (WW)

Total Lumen Output of Fixture: 4,973 lumens
CRI≥90

Beam angle: 9°/15°/20°/25°/30°

Ultra-high brightness, energy-saving replacement
for traditional 1000W PAR

Outstanding strobe effect with variable speed


Smooth dimming 0-100%

Flicker-free management

IPX4 rated

Dust-proof and oil-proof design

Technical Specifications

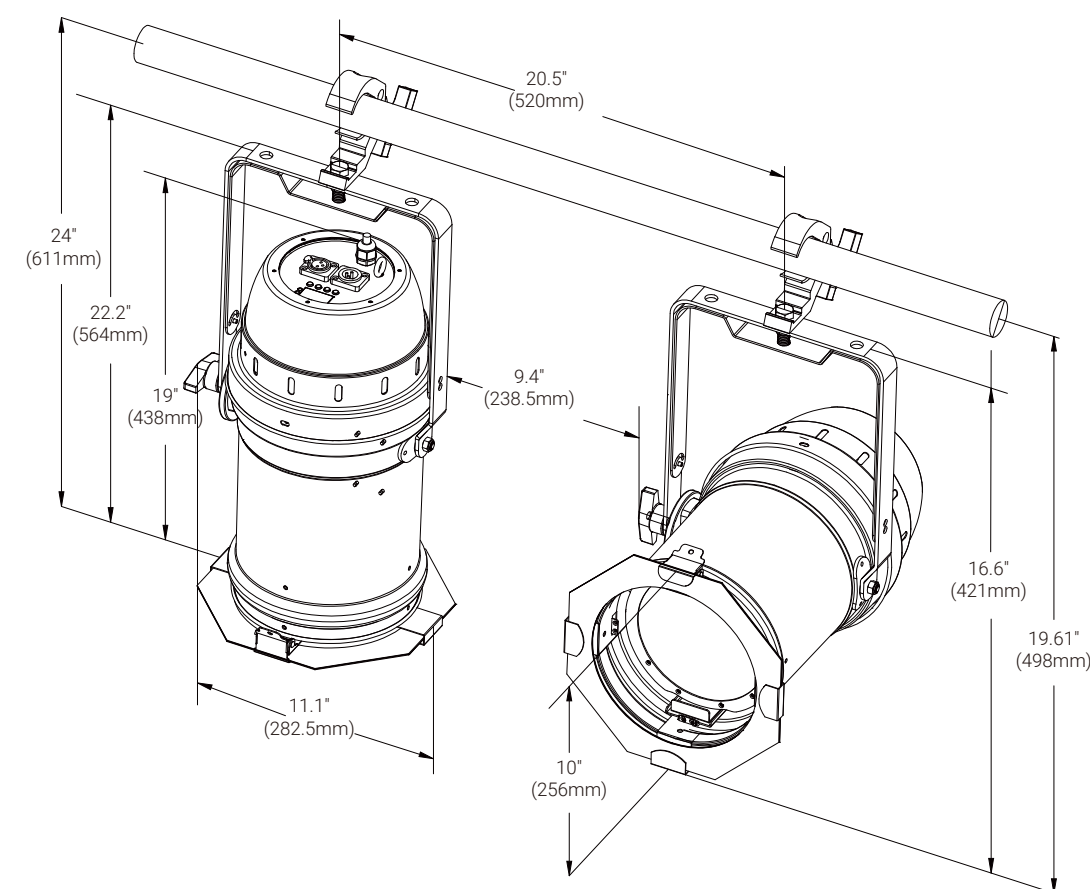

Light Source

- Light Source: 1x 100W CW LED module (CW)
1x 100W WW LED module (WW)
- Total Lumen Output of Fixture: 4,973 lumens
- Life Expectancy: 20,000 hours * manufacturer specification

Optical System

- Advanced optical system ensures clear, wide-range wash effect
- Beam Angle: 9°/15°/20°/25°/30°

Other Effects

- Outstanding variable speed strobe effect
- Smooth dimming 0-100%

Control

- 4 touch button control panel
- Protocols: DMX-512, Manual
- DMX Protocol Modes: 3
- Control channels: 1/ 2/3
- Dimmer: 8 bit or 16 bit
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 108W
- Power In/Out: Power cord out
- Data In/Out: 3-pin or 5-pin waterproof XLR

Physical Information

- Fixture Dimensions:
256 x 283 x 564 mm (10.1" x 11.1" x 22.6")
- Weight: 4.5 kg (9.9 lbs)

Work Environment

- Maximum Ambient Temperature: 40°C
- Maximum Surface Temperature: 65°C
- Minimum Operating Temperature: 0°C
- Protection Rating: IPX4

Installation

- Horizontal or vertical mounting
- Universal working position
- Supporting feet with 3 locking points
- Safety cable attachment point



(CW)



(WW)

Photometric (Images)

