

STAGE PAR 400 ZOOM IP

MP-400Z IP

Light Source
7 x 30W RGBW LED

Beam Angle
6°-38°

Field Angle
11°-59°

Total Lumen Output of Fixture
3,250 lumens

Protection Rating
IP66



ACME

STAGE PAR 400 ZOOM IP



Main Features

Light Source: 7 x 30W RGBW LED

Total Lumen Output of Fixture: 3,250 lumens

Uniform RGBW color mixing and rainbow effect

The heat dissipation module with high-efficiency heat pipe, adopted to expel heat rapidly, which greatly reduces the light decay and ensures the LED's service life

The model is novel and small, net weight only 8.5Kg, which greatly saves the transportation cost

With color correction function, can make the color compensation, so that different lighting can present the same color effect

Advanced RDM function

Built-in programs for selection


Can change the DMX address code, reset the lighting, transform the voice control mode by console

Flicker free management

Dust-proof and oil-proof design

IP66 rated

Technical Specifications

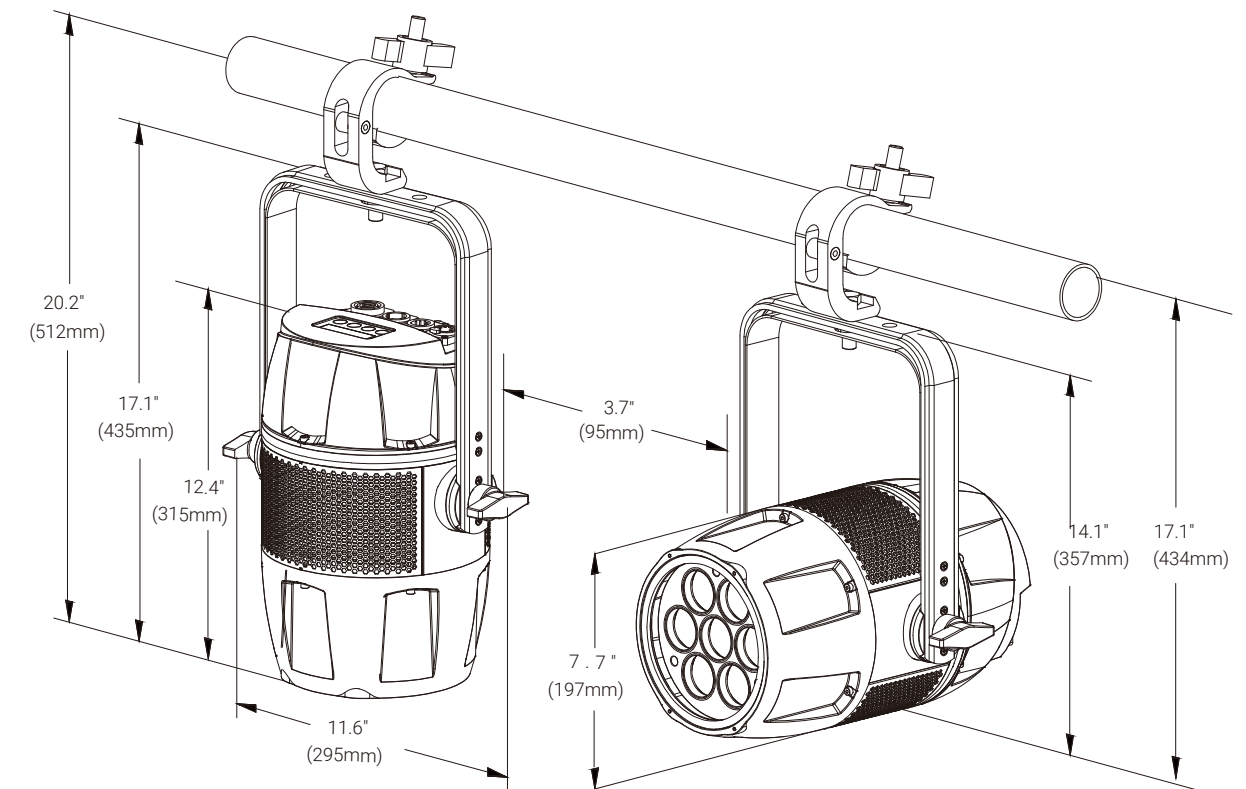

Light Source

- Light Source: 7 x 30W RGBW LED
- Life Expectancy: 30,000 hours*

*Source manufacturer specification

Optical System

- Advanced optical system to ensure clear and excellent static effect
- High-efficiency zoom optical system, ratio 1:6.7
- Beam Angle: 6°-38°
- Field Angle: 11°-59°

Other Effects

- Flicker free management
- High light output, low noise

Control

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX512, RDM
- DMX Protocol modes: 3
- Control channels: 5/7/9
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 250W
- Power In/Out: Waterproof power connectors (TRUE1 type)
- Data In/Out: 3-pin or 5-pin waterproof XLR

Physical Information

- Fixture Dimensions:
318 x 295 x 316 mm (12.5" x 11.6" x 12.4")
Weight: 8.5 kg (18.7 lbs)


Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP66

Installation

- Horizontally or vertically mounting
- Universal working position
- The feet support with 3 locking points
- Safety cable attachment point

Photometric (Images)

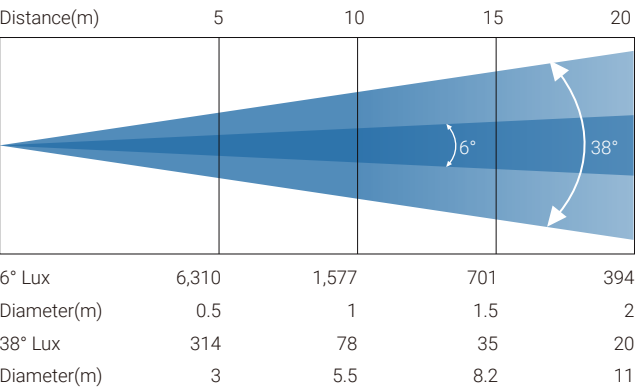

Specifications subject to change without notice.
01/02/2025