

THUNDERBOLT

LP-14410



Light Source

144 x 15W RGBW LEDs

Beam Angle

22°

Acme

THUNDERBOLT



Main Features

Light source: 144 x 15W RGBW LEDs

12 individually controllable LED zones

11 different DMX maps chose from

High brightness, outstanding wash effects

Outstanding strobe effect with variable speed

IP65 rated, can be outdoor use all year round

Smooth dimming 0-100%

Flicker-free operation

Quantity of Connections:


Maximum Quantity of DMX Connections: 32 sets

Maximum Quantity of Power Supply Connections:

120V, 60Hz: 1 set

230V, 50Hz: 2 sets

Technical Specifications

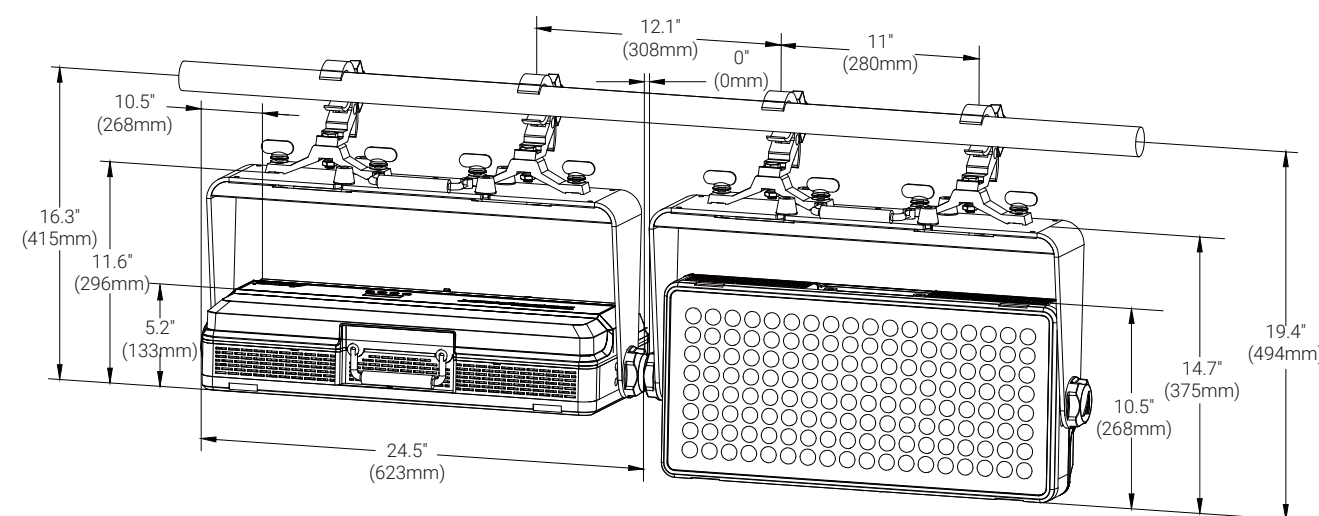

Light Source

- Light Source: 144 x 15W RGBW LEDs
- Total Lumen Output of Fixture: 50,000 lumens
- Life Expectancy: 20,000 hours*

*Source manufacturer specification

Optical System

- Beam Angle: 22°
- RGBW color mixing
- 12 individually controllable LED zones

Other Effects

- High-brightness, outstanding wash effects
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%

Control

- 4 touch button control panel
- Display: OLED display
- Control Mode: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes:
 - A. 4/8 (16-bit)/8/9/52
 - B. 1/2/3/4/6/12 pixels
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connections

- Auto-ranging power supply
- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 1,580W
- Power In/Out: Waterproof power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin waterproof XLR, RJ45 connector

Physical Information

- Fixture Dimensions:
623 x 133 x 397 mm (24.5" x 5.2" x 15.6")
- Weight: 17.0 kg (37.5 lbs)

Packing Information

- Flight Case Dimensions:
1,220 x 815 x 630 mm (48.0" x 32.1" x 24.8")
- Weight: 177.2 kg (390.7 lbs) (six-pack loader case)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP65


Installation

- Horizontal or vertical mounting
- Universal working position
- 2 omega brackets
- Retractable feet for floor applications
- Concealed magnet for attaching accessories
- Safety cable attachment point

BARN DOOR

IP65

Photometric (Images)

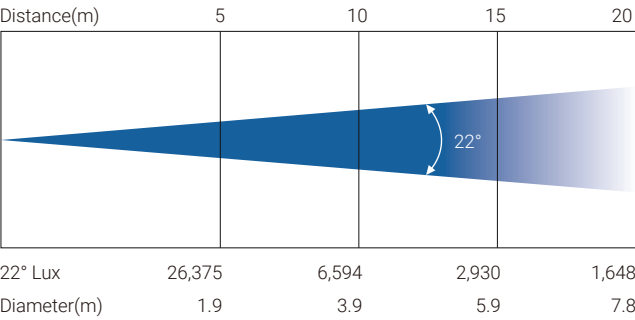

Specifications subject to change without notice.
11/28/2024