

LIGHT PANEL 1000

LP-F1000 CW/WW/VW



Light Source
240 CW LED (cw)
240 WW LED (ww)
240 CW LED + 240 WW LED (vw)

Beam Angle
110°



TV LIGHT PANEL 1000




Main Features

Light source:
 240 CW LED (CW)
 240 WW LED (WW)
 240 CW LED + 240 WW LED (VW)
 Color Temperature Output of Fixture:
 3,200±150K (WW)
 5,600±250K (CW)
 3,200±150K~5,600±250K (VW)
 Beam Angle: 110°

CRI: WW≥95, CW≥94, VW≥94
 CQS: WW≥94, CW≥94, VW≥94
 TLCI: WW≥95, CW≥95, VW≥95
 TV LIGHT PANEL 1000 series with outstanding floodlight and soft light, widely applied to photographic studio, TV station, conference room, shopping mall; Battery backup for user operation without connecting to the mains.

Technical Specifications

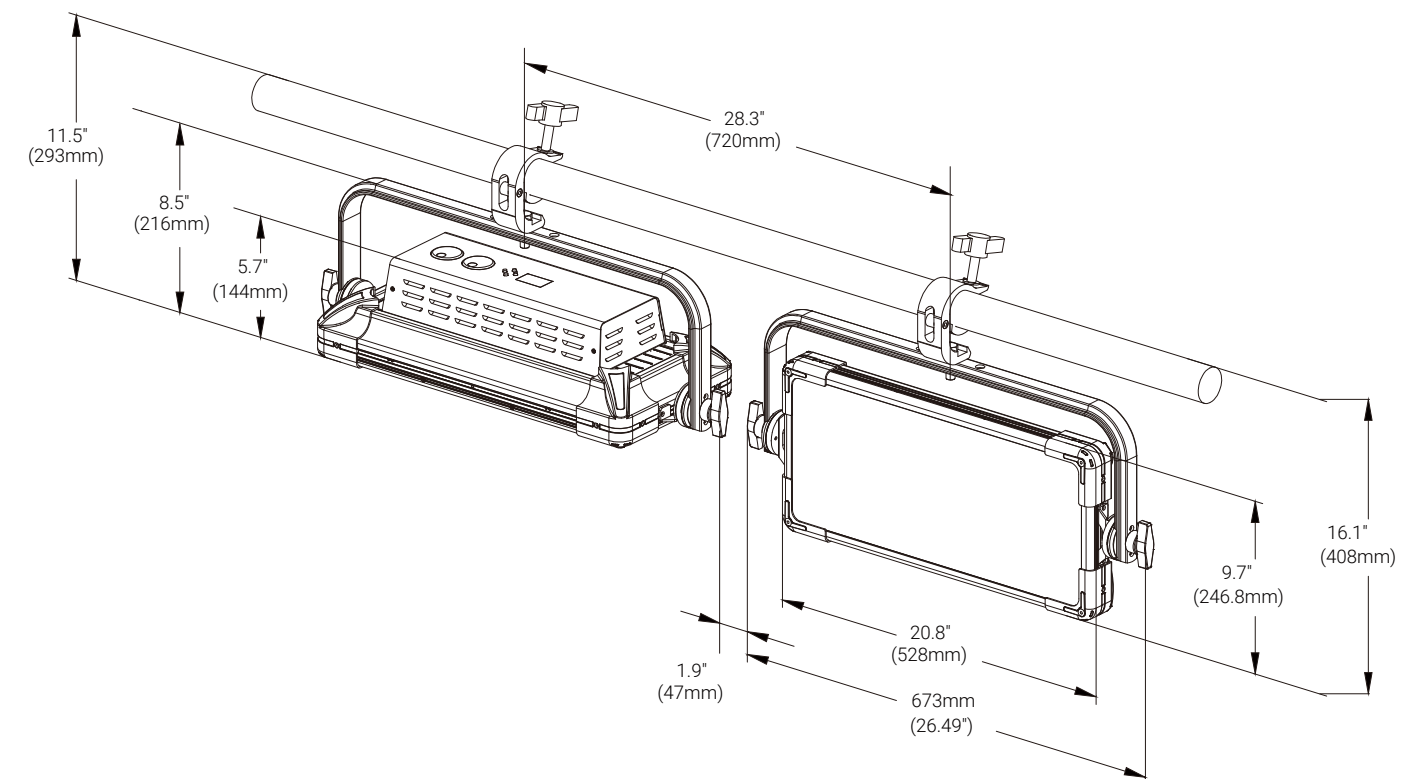

Light source

- Light Source:
240 CW LED (CW)
240 WW LED (WW)
2240 CW LED + 240 WW LED (VW)
- Color Temperature:
3,200±150K (WW)
5,600±250K (CW)
3,200±150K-5,600±250K (VW)

Optical System

- CRI: WW≥95, CW≥94, VW≥94
- CQS: WW≥94, CW≥94, VW≥94
- TLCI: WW≥95, CW≥95, VW≥95
- Beam Angle: 110°

Other Effects

- TV LIGHT PANEL 1000 series with outstanding floodlight and soft light, widely applied to photographic studio, TV station, conference room, shopping mall; Battery backup for user operation without connecting to the mains.

Control

- 4-button, 1-knob
- Display: LCD display
- Protocols: RDM, DMX512, Show Mode, Art-Net
- DMX Protocol Modes: 4
- Control Channels:
1/2A/2B/3 (CW/WW)
2/3A/3B/4/5/6 (VW)
- Firmware Upgrade: Upgrade the firmware via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input Voltage Range: 100–240Vac; 50/60 Hz
- Power Consumption: 100W
- Power In/Out: Power connector input (TRUE1 type)
- Data In/Out: 5-pin XLR

Fixture Specifications

- Fixture Dimensions:
673 x 144 x 306 mm (26.5" x 5.7" x 12.0")
Weight: 9.2 kg (20.2 lbs)
- Flight Case Dimensions :
1,110 x 740 x 720 mm (43.7" x 29.1" x 28.3")
Weight: 89.1kg (196.4 lbs) (four-pack loader case)

Work Environment

- Maximum ambient temperature: 40°C
- Minimum operating temperature: 0°C
- Maximum surface temperature: 65°C
- Protection Rating: IP20


Installation

- Horizontally or vertically mounting
- Universal working position
- The feet support with 3 locking points
- Safety cable attachment point

Included Barndoor



Photometric (Images)

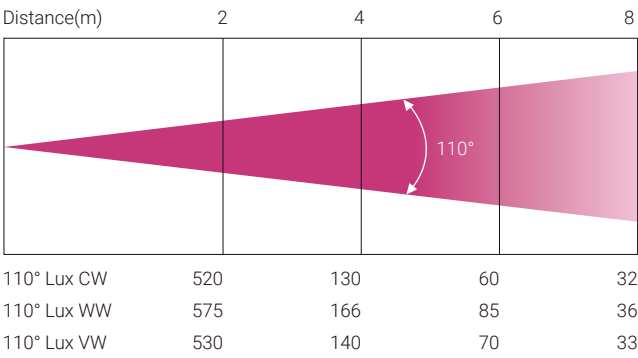

Specifications subject to change without notice.
11/30/2024