

TV LIGHT PANEL 3000

LP F3000



Light Source

336 x 2.5W RGB LED
336 x 3W WW LED

CRI

RA>95, R9≥95, TLCI≥92

Total lumen output of Fixture

39,000 lumens


Acme

TV LIGHT PANEL 3000



INCLUDING STANDARD BARNDOR

1



2



Main Features

Variable CTO ranging from 2,500K-20,000K

Color Rendering: RA>95, R9≥95, TLCI≥92

Excellent RGBW color mixing

Divided into 6 controllable zones

Soft light effect

Outstanding strobe effect with variable speed

Smooth dimming 0-100% , manual dimming controls

Manual CTO controls

Tint Correction: Green/Magenta adjustment

3 Silent Operation Modes:

Standard Mode: Noise Level <34.1dB


Silent Mode: Noise Level <30.8dB


Fan-off Mode: Ambient Noise Only

Flicker-free output, frequency adjustable, up to 25KHz,
the most demanding production environments

Can be powered by 48V battery (battery not supplied)

Technical Specifications

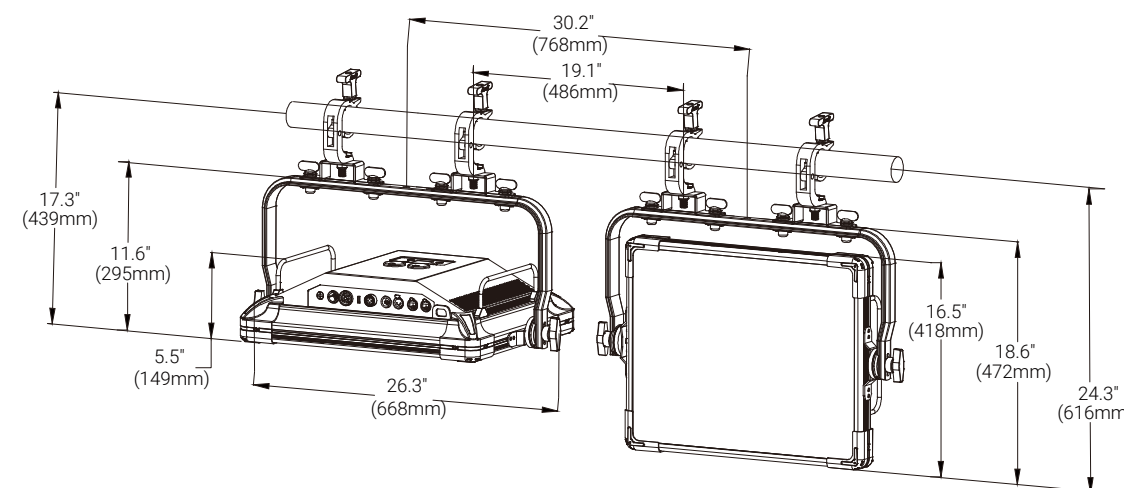

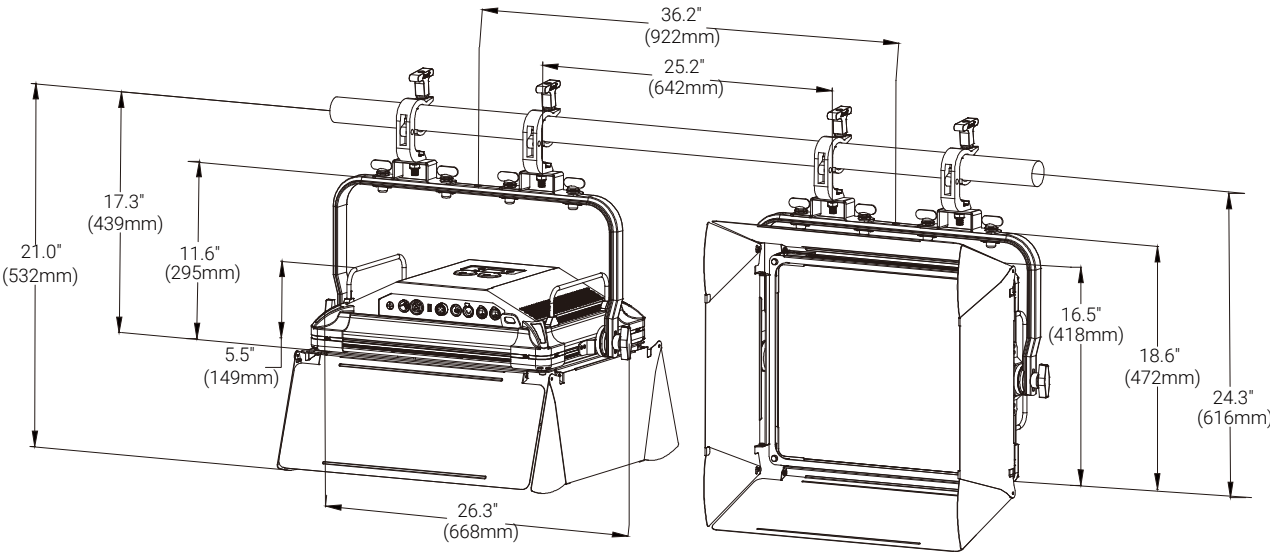

Light Source

- Light Source:
- 336 x 2.5W RGB LED
- 336 x 3W WW LED
- Total Lumen Output of Fixture: 39,000 lumens
- Life Expectancy: 50,000 hours*

*Source manufacturer specification

Optical System

- Beam Angle: 110°
- Field Angle: 160°

Colors

- Linear CTO Color Correction: 2,500K-20,000K



- Tint Correction: Green/Magenta adjustments

Other Effects

- Excellent RGBW color mixing
- Divided into 6 controllable zones
- Soft light effect
- Smooth dimming 0-100%, manual dimming controls
- Outstanding strobe effect with variable speed

Control

- Display: LCD display
- Operational Modes: DMX Control, Manual Control
- Protocols: DMX512, RDM, Art-Net, sACN
- DMX Protocol Modes: 2
- Control Channels: 10/28
- Firmware Upgrade: Upgrade via DMX link or USB stick

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60Hz
- Power Consumption: 455W
- Power In/Out:
- Power connector in/out
- DC 48V battery connector (battery not supplied)
- Data In/Out: 3-pin or 5-pin XLR, RJ45 connector

Physical Information

- Fixture Dimensions:
- 668 x 149 x 492 mm (26.3" x 5.9" x 19.4")
- Weight: 12.0 kg (26.5 lbs)

Packing Information

- Carton Dimensions:
- 755 x 570 x 330 mm (29.7" x 22.4" x 13.0")
- Weight:
- G.W.: 19 kg (41.9 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -20°C
- Maximum Surface Temperature: 55°C
- Protection Rating: IP20

Installation

- Horizontal or vertical mounting
- Universal working position
- 2 pairs 1/4-turn locking points and one locking hole on the hanger
- 2 omega brackets
- Safety cable attachment point

Included Items


- Digital user manual
- Power cable
- 2 omega brackets (3002003928)
- Barndoor (63581220)

Optional Accessories (With Order Code)


- Clamp: C-250B (2060001632)
- Safety Cable: SW-05 (2060001603-A)
- Signal Cable: 3-pin or 5-pin signal cable
- Honeycomb Grid (20mm thick): 63580912

Photometric (Images)

Beam Angle:

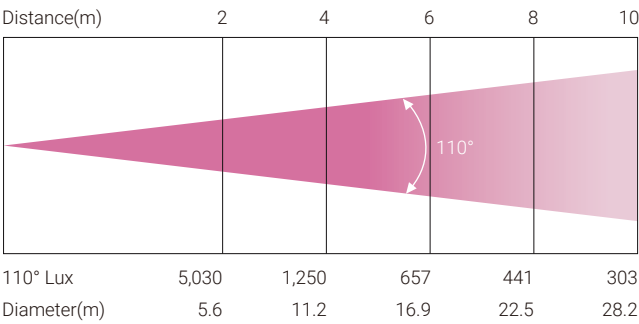

Field Angle:

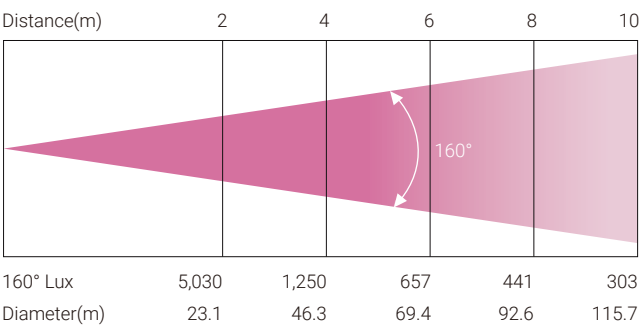

Specifications subject to change without notice.

01/16/2025