
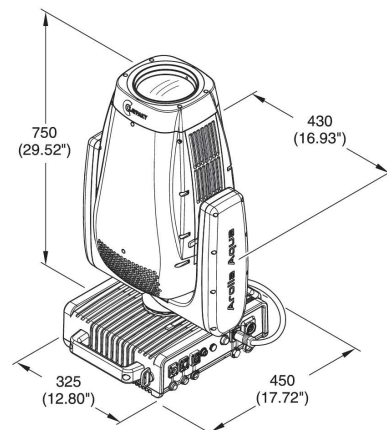


MODEL: AROLLA AQUA

CODE: CL3027

April 27, 2026

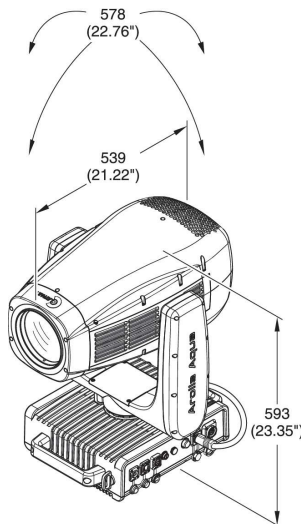

LIGHT SOURCE:

- Source type:** • White LED
- Power:** • 900W
- Color temperature:** • 7000 K
- CRI:** • 70+ with selectable filter for CRI 88+
- LED life expectancy:** • 40.000 Hrs L70*
- * It may vary depending on various factors, such as the type of use and environment

PHOTOMETRIC DATA:

- Zoom range:** • 5.5° - 50°
- Lm output:** • 40.360 Lm (integrating sphere)
- Front lens:** • Ø 140 mm
- Optical syst.:** • High efficiency

NOISE LEVEL:

- Fixed presets:**
 - Theatre mode: 40.0 dBA
 - Silent mode: 42.3 dBA
 - Constant mode: 50.2 dBA
 - Auto mode: 50.3 dBA

CONTROL & CONNECTIONS:

- Personalities:** • 2 modes with 38 / 41 control channels
- Protocols:**
 - DMX, Art-Net, sACN, RDM
 - CRMX (Lumen Radio)
- Connectors:**
 - Locking 5 pin XLR IN/OUT
 - RJ45 IN
- Power con.:** • PowerCon True1 IN/OUT
- Web server:** • Built-in
- CloudIO:** • Fully compatible

DYNAMIC EFFECTS:

- Colors:**
 - Linear CMY
 - Linear CTO
 - Fixed color wheel with 6 dichroic colors including high CRI filter
- Framing Systems:**
 - 4 blades with ±60° rotating of the full system
 - "Total curtain" effect allowing the full blackout with each single blade
 - Built-in macros
- Gobos:**
 - 1 static gobo wheel with 8 replaceable gobos
 - 1 rotating gobo wheel with 7 HD indexable and replaceable gobos
 - Ext. diam. 26.95 mm
 - Image diam. 20.5 mm
 - Thickness 1.1 mm

Frost:	• Light frost 1° for soft diffusion • Heavy frost 5° for wash effect
Rotating effects:	• Aluminum animation wheel with continuous rotation in both directions at variable speed • Four-faced prism with rotation in both directions at variable speed
Iris:	• Motorized with variable pulse and random effects
Movement:	• Tilt: 270° - 16 bit • Pan: 540° - 16 bit • Automatic repositioning • Smooth movement selectable by functional channel • Mechanical Pan/Tilt lock for safe transportation and maintenance
Beam:	• Motorized zoom and focus
Dimmer / Shutter:	• High resolution electronic dimmer - 24 bit, 5 curves • High speed electronic shutter and strobe

HARDWARE & SOFTWARE:

- Long life self-charging battery
- Display graphic LCD backlit B/W display
- Firmware upload from another fixture
- Firmware upgrade via Web Server
- Diagnostic
- DMX monitoring
- Remote access through RDM

HOUSING:

- Magnesium and steel structure with plastic components
- Two side handles for transportation
- IP66 protection rate
- Working in any position
- Hanging system: with fast-lock Omega clamps (1/4 turn) on the base
- Optional safety chain

ELECTRICAL:

Operating voltage:	• 100-240V, 50/60 Hz
Power Supply:	• Electronic auto range with active PFC
MAX power consumption:	• 1100W

THERMAL SPECIFICATION:

MAX Ambient temperature:	• 45°C (113°F)
Min Ambient Temperature:	• -20°C (-4°F)
MAX temp. of the ext. surface:	• 90°C (194°F)
Total heat dissipation:	• 4782 BTU/hr ±10% / 5040 kJ/hr ±10%

SAFETY SPECIFICATIONS:

Min. dist. of illum. objs:	• 2.5 m (8'2")
Min. dist. from flamm. mat.:	• 0.2 m (8")
Protections:	• Thermally protected power supply (overheating and cooling failure) • Forced ventilation with axial fans • Fuse T6.3A – 250V

COMPLIANCE:

CE Marking (in conformity to the following):

- 2014/53/EU - Radio Equipment Directive (RED)
- 2011/65/EU - Restriction of the use of certain hazardous substances (RoHS)
- 2009/125/EC - EcoDesign requirements for Energy-related Products (ErP)

UKCA conforms to UK regulations:

- S.I. 2017 N.1206
- S.I. 2012 N.3032
- S.I. 2021 N.745

cMETus LISTED:

- UL 1573:2003
- CSA C22.2 N.166:2015

PACKAGING:

- Carton box + Polystyrene
- Carton box + Foam shell
- Flight case + Foam shell (2 positions)

WEIGHT & SIZES:

Weight:	• 38.7 Kg (85.3 lbs)
Base dim.s:	• 325 x 450 mm • 12,8 x 17.72 In
Height with vert. head (h):	• 750 mm • 29.52 In
Dist. b/t 2 fixt:	• 700 mm

ACCESSORIES:

Omega bracket:	• 2x183102/805 (Included)
ETL Power:	• CAB02B/802 (Included)* * Cord 1.5 m (bare end with IP65 PowerConTrue1 conn.)
Foam shell:	• F21340/001 (Optional)
Flight case (2 pos):	• CF1024F (Optional)
Safety Chain:	• 105041-001 (Optional)
Clamp:	• C21070 (Optional)