LEARNED SIMULATORS THAT SATISFY THE LAWS OF THERMODYNAMICS

Q. Hernández, B. Moya, A. Badías

Aragon Institute of Engineering Research Universidad de Zaragoza 50018 Zaragoza, Spain {quercus, beam, abadias}@unizar.es

F. Chinesta

ESI Group Chair and PIMM Lab **ENSAM Institute of Technology** 75013 Paris, France Francisco.Chinesta@ensam.eu

E. Cueto

Aragon Institute of Engineering Research Universidad de Zaragoza 50018 Zaragoza, Spain ecueto@unizar.es

ABSTRACT

When the physical phenomenon under scrutiny possesses conserved quantities (typically, energy), it is relatively easy to employ inductive biases to enforce these 2 symmetries in the learned description. However, when the system presents dissi-3 pation, the right structure to impose is far from obvious. In this work we enforce a metriplectic structure to guarantee the fulfillment of the principles of thermodynamics, namely, the conservation of energy in closed systems and the positive production of entropy. The result is a learned energy-entropy-momentum integration scheme [Energy-entropy-momentum integration schemes for general discrete 8 non-smooth dissipative problems in thermomechanics. D. Portillo et al., Int. J. 9 Numer. Meth. Engng 2017; 112:776-802]. Examples are shown that demon-10 strate that the proposed technique needs fewer data and attains higher accuracy on training as well as tests data than standard black-box approaches. 12

Introduction 13

11

- Traditional, engineered simulators have shown a tremendous success in many branches of engineer-14
- ing and applied sciences. Today, their main limitation is not their ability to reproduce faithfully 15
- complex physical phenomena, but their CPU consumption in daily practice. Thus, in situations such 16
- as many-query problems, inverse problems, high-dimensional parametric problems or real-time de-17
- cision making, to name but a few, engineered simulators continue to show important limitations in 18
- terms of hardware requirement and time to response. 19
- This opened the interest in the development of *learned* simulators. These are based on the employ, 20
- in general, of machine learning techniques (particularly, deep learning) that, fed with abundant data, 21
- could make predictions on a priori unseen scenarios. Despite the well-known advantages of deep 22
- learning, neural networks are well known to be prone to a black-box character. 23
- Halfway between the two approaches, physics-based neural networks have appeared as an appealing 24
- possibility to satisfy both requirements: credibility of the predictions and short time to response. 25
- Among the first approaches of this type, one can cite, for instance, the works by Raissi et al. (2017a) 26
- or Raissi et al. (2017b). 27

PREVIOUS WORKS IN THE FIELD

One can think of the process of learning physical phenomena from data as a sort of dynamical system 29 (E, 2017). Thus, we assume the system as governed by a set of variables $z \in \mathcal{M} \subseteq \mathbb{R}^n$, with \mathcal{M} the state space of these variables, which is assumed, thanks to the manifold hypothesis, to have the structure of a differentiable manifold in \mathbb{R}^n (Fefferman et al., 2016).

Learning a simulator, therefore, would be equivalent to determine the time evolution of the system, as given by an ordinary differential equation (ODE) of the type

$$\dot{\boldsymbol{z}} = \frac{d\boldsymbol{z}}{dt} = F(\boldsymbol{x}, \boldsymbol{z}, t), \ \boldsymbol{x} \in \Omega \in \mathbb{R}^D, \ t \in \mathcal{I} = (0, T], \ \boldsymbol{z}(0) = \boldsymbol{z}_0, \tag{1}$$

where ${\pmb x}$ and t refer to the space and time coordinates within a domain with D=2,3 dimensions. Following this rationale, $F({\pmb x},{\pmb z},t)$ would be the function that gives, after some time T, the flow map ${\pmb z}_0 \to {\pmb z}({\pmb z}_0,T)$. Discretizing in time Eq. (1) would provide the sought simulator that, once the state of the system at time t is known, is able to provide the state of the system at time $t+\Delta t$.

This rationale soon paved the way for the imposition of inductive biases, i.e., for the imposition of known characteristics in the function F. For instance, if certain symmetries apply to the system—conservation of energy is the most obvious one—it is straightforward to impose them in the loss function of the network. Different works have followed this route (Bertalan et al., 2019; Greydanus et al., 2019; Toth et al., 2019; Zhong et al., 2019; Bertalan et al., 2019a; Jin et al., 2020b; Tong et al., 2020). More recently, the Poisson structure of such systems has also been exploited by Jin et al. (2020a).

However, no solution has been proposed, to the best of our knowledge, to the problem of learning simulators that preserve the general structure of the problem if dissipation is included, for instance.

48 3 LEARNED SIMULATORS THAT PRESERVE THE STRUCTURE OF THE 49 PROBLEM

3.1 THE GENERAL SETTING

As mentioned before, to increase the credibility of learned simulators it is of utmost importance to develop techniques able to satisfy known properties of the system. If the system is conservative, it possesses a Hamiltonian structure, and can therefore be written in the form

$$\frac{dz}{dt} = L \frac{\partial E}{\partial z},\tag{2}$$

where

50

$$L: T^*\mathcal{M} \to T\mathcal{M},$$

with $T^*\mathcal{M}$ and $T\mathcal{M}$ represent, respectively, the cotangent and tangent bundles of \mathcal{M} , and E represents the Hamiltonian (the energy) of the system, which is precisely the magnitude that is conserved.

L is the so-called Poisson matrix (since it defines a Poisson bracket $\{z, E\}$).

If the phenomenon under scrutiny is dissipative, however, a second potential must be introduced into the formulation, the so-called Massieu potential (actually, entropy). Dissipation will be introduced by a dissipative or friction bracket [z, S], where S represents entropy. For clarity, we express the resulting formulation in matrix form:

$$\frac{d\mathbf{z}}{dt} = \mathbf{L}\frac{\partial E}{\partial \mathbf{z}} + \mathbf{M}\frac{\partial S}{\partial \mathbf{z}}.$$
 (3)

Here, $M: T^*\mathcal{M} \to T\mathcal{M}$ represents the friction matrix. For L to construct a valid Poisson bracket, it is known that it must be skew symmetric, while M must be symmetric, positive semi-definite. For this to be valid, still one more requirement is needed: the so-called degeneracy conditions. These impose that the gradient $\frac{\partial S}{\partial z}$ is in the null space (is a Casimir) of the L operator, while the gradient $\frac{\partial E}{\partial z}$ is in the null space of M,

$$L\frac{\partial S}{\partial z} = M\frac{\partial E}{\partial z} = 0. \tag{4}$$

These conditions guarantee the conservation of energy by the contribution of M to the dynamics or, equivalently, that entropy is not affected by the reversible dynamics. This mutual degeneracy requirements ensure that:

$$\frac{\partial E}{\partial t} = \frac{\partial E}{\partial z} \cdot \frac{\partial z}{\partial t} = \frac{\partial E}{\partial z} \left(L \frac{\partial E}{\partial z} + M \frac{\partial S}{\partial z} \right) = 0,$$

which expresses the conservation of energy in an isolated system. In other words, the first law of thermodynamics. Entropy S, in turn, satisfies:

$$\frac{\partial S}{\partial t} = \frac{\partial S}{\partial z} \cdot \frac{\partial z}{\partial t} = \frac{\partial S}{\partial z} \left(\boldsymbol{L} \frac{\partial E}{\partial z} + \boldsymbol{M} \frac{\partial S}{\partial z} \right) = \frac{\partial S}{\partial z} \boldsymbol{M} \frac{\partial S}{\partial z} \geq 0,$$

which guarantees the entropy inequality, this is, the second law of thermodynamics.

Eq. (3) is known as the General Equation for the Non-Equilibrium Reversible-Irreversible Coupling (GENERIC) and is due to Grmela & Öttinger (1997). Such a formulation is called *metriplectic* for being a combination of metric and symplectic structures (Morrison, 1986).

3.2 The proposed methodology

70

Our approach, therefore, is built on the assumption of a metriplectic structure for the system, and the data-based identification of such a structure, subject to the degeneracy conditions given by Eq. (4). For that purpose, we first discretize Eq. (eq:generic3) in time, by a standard forward Euler method, thus leading to

$$\frac{\boldsymbol{z}_{n+1} - \boldsymbol{z}_n}{\Delta t} = \mathsf{L}_n \cdot \frac{\mathsf{D}E_n}{\mathsf{D}\boldsymbol{z}_n} + \mathsf{M}_n \cdot \frac{\mathsf{D}S_n}{\mathsf{D}\boldsymbol{z}_n},\tag{5}$$

such that $z_{n+1} = z_{t+\Delta t}$. L_n and M_n are the discretized version of the Poisson and friction operators. $\frac{DE_n}{Dz_n}$ and $\frac{DS_n}{Dz_n}$ represent the discrete gradients of the energy and the entropy. Finally, the identified structure must be subject to:

$$\mathsf{L}_n \cdot \frac{\mathsf{D}S_n}{\mathsf{D}\boldsymbol{z}_n} = \boldsymbol{0}, \quad \mathsf{M}_n \cdot \frac{\mathsf{D}E_n}{\mathsf{D}\boldsymbol{z}_n} = \boldsymbol{0},$$
 (6)

thus ensuring the thermodynamical consistency of the resulting model.

79 4 STRUCTURE-PRESERVING NEURAL NETWORKS

To construct structure-preserving neural networks, we first train standard feedforward networks of fully-connected layers with no cyclic connections so as to identify the metriplectic structure of the system under scrutiny. However, to unveil the intrinsic dimensionality of the system, regardless of the dimensionality of the data, we employ a sparse autoencoder. A sketch of the proposed architecture is depicted in Fig. 1.

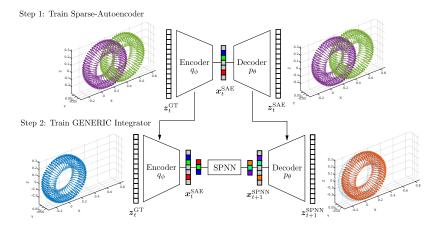


Figure 1: Sketch of the proposed algorithm for the rolling tyre problem, Section 5. Step 1: A sparse autoencoder (SAE) is trained with time snapshots of a ground truth physical simulation, in order to learn an encoded representation of the full-order space. Step 2: A structure-preserving neural network (SPNN) is trained to integrate the full time evolution of the latent variables, consistently with the GENERIC structure of the underlying physics of the problem.

The loss function for our neural network will therefore include three terms:

• Data loss: measuring the agreement between the network output and the real data,

$$\mathcal{L}_n^{\text{data}} = ||x_{n+1}^{\text{SAE}} - x_{n+1}^{\text{SPNN}}||_2^2.$$
 (7)

• Fulfillment of the degeneracy conditions: This is the inductive bias that accounts for the degeneracy conditions, Eq. (6) in order to ensure the thermodynamic consistency of the solution,

$$\mathcal{L}_n^{\text{degen}} = ||\mathsf{L}_n \cdot \mathsf{DS}_n||_2^2 + ||\mathsf{M}_n \cdot \mathsf{DE}_n||_2^2. \tag{8}$$

Regularization: In order to avoid overfitting, an extra L2 regularization term L^{reg} is added to the loss function,

$$\mathcal{L}^{\text{reg}} = \sum_{l}^{L} \sum_{i}^{n^{[l]}} \sum_{j}^{n^{[l+1]}} (w_{i,j}^{[l],\text{SPNN}})^{2}.$$
 (9)

Data are split in a partition of train snapshots ($N_{\rm train}=80\%$ of the database snapshots) and test snapshots ($N_{\rm test}=20\%$ of the database snapshots) so that $N_T=N_{\rm train}+N_{\rm test}$.

The PyTorch code for the networks implemented in this work can be dowloaded from our GitHub repository: https://github.com/quercushernandez.

96 5 PERFORMANCE TEST

86

87

88

89

90 91

107 108

109

110

111

112

We consider a simulation of the transient re-97 sponse of a rolling tire ($D_{\text{tire}} = 0.66 \text{ m}$) im-98 pacting with a curb ($h_{\rm curb} = 0.025$ m). The 99 tire is inflated at 200 kPa, and is subjected to 100 a load of 3300 N in the vertical axis. The free 101 rolling conditions are determined in a separated 102 analysis, corresponding to $\omega = 8.98$ rad/s for 103 a translational horizontal velocity of $v_0 = 10$ 104 km/h (see Fig. 2). More details can be found at 105 Hernandez et al. (2020). 106

The number of hidden layers in both the encoder and decoder is $N_h^{\rm SAE}=2$ in the three variables with 40 neurons each in position and velocity, and 80 neurons in the stress tensor, with ReLU activation functions and linear in the first and last layers. The number of bottleneck variables is set to $N_{d,q}=10$ for the posi-

neck variables is set to $N_{d,q}=10$ for the position, $N_{d,v}=10$ for velocity and $N_{d,\sigma}=20$ for the stress tensor. Thus, the total dimensionality

 $v_0 = 10 \; \mathrm{km/h}$ $v_0 = 10 \; \mathrm{km/h}$ h_{curb} $6962 \; \mathrm{nodes}$ $5283 \; \mathrm{elements}$

Figure 2: Hyperelastic tire rolling towards a curb. 3D position, 3D velocity and Cauchy stress tensor components are tracked for the total of 4140 selected nodes.

of the bottleneck latent vector is $N_d = N_{d,q} + N_{d,v} + N_{d,\sigma} = 40$. Results in the prediction of a simulation not seen before by the system arre shown in Fig. 3, where the time evolution of the state variables z is shown.

119 ACKNOWLEDGMENTS

This project has been funded by ESI Group through contract OTRI-2019-0060 with the University of Zaragoza. This funding is gratefully acknowledged.

122 REFERENCES

Tom Bertalan, Felix Dietrich, Igor Mezić, and Ioannis G. Kevrekidis. On learning hamiltonian systems from data. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 29(12):121107, Dec 2019a. ISSN 1089-7682. doi: 10.1063/1.5128231. URL http://dx.doi.org/10.1063/1.5128231.

Tom Bertalan, Felix Dietrich, Igor Mezić, and Ioannis G Kevrekidis. On learning hamiltonian systems from data. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 29(12):121107, 2019b.

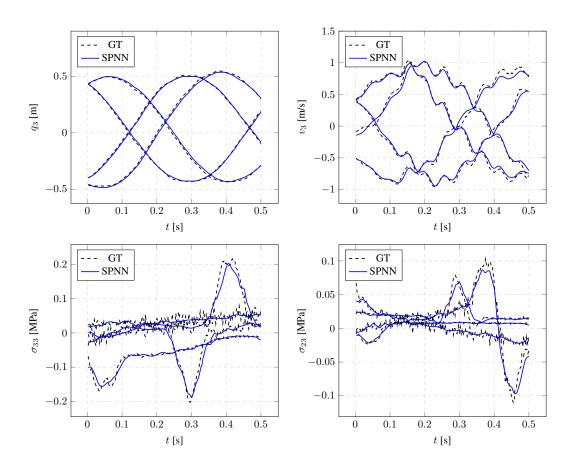


Figure 3: Results of the complete integration scheme (SPNN) with respect to the ground truth simulation (GT) for 4 different nodes and 4 different variables $(q_3, v_3, \sigma_{33} \text{ and } \sigma_{23})$ of the hyperelastic rolling tire database.

Weinan E. A proposal on machine learning via dynamical systems. *Communications in Mathematics and Statistics*, 5(1):1–11, Mar 2017. ISSN 2194-671X. doi: 10.1007/s40304-017-0103-z. URL https://doi.org/10.1007/s40304-017-0103-z.

133 Charles Fefferman, Sanjoy Mitter, and Hariharan Narayanan. Testing the manifold hypothesis.

134 *Journal of the American Mathematical Society*, 29(4):983–1049, 2016.

Samuel Greydanus, Misko Dzamba, and Jason Yosinski. Hamiltonian neural networks. In *Advances in Neural Information Processing Systems*, pp. 15379–15389, 2019.

Miroslav Grmela and Hans Christian Öttinger. Dynamics and thermodynamics of complex fluids. i. development of a general formalism. *Physical Review E*, 56(6):6620, 1997.

Quercus Hernandez, Alberto Badias, David Gonzalez, Francisco Chinesta, and Elias Cueto.

Deep learning of thermodynamics-aware reduced-order models from data. *arXiv preprint arXiv:2007.03758*, 2020.

Pengzhan Jin, Zhen Zhang, Ioannis G Kevrekidis, and George Em Karniadakis. Learning poisson systems and trajectories of autonomous systems via poisson neural networks. *arXiv preprint arXiv:2012.03133*, 2020a.

Pengzhan Jin, Aiqing Zhu, George Em Karniadakis, and Yifa Tang. Symplectic networks: Intrinsic structure-preserving networks for identifying hamiltonian systems. *arXiv preprint arXiv:2001.03750*, 2020b.

Philip J Morrison. A paradigm for joined hamiltonian and dissipative systems. *Physica D: Nonlinear Phenomena*, 18(1-3):410–419, 1986.

- Maziar Raissi, Paris Perdikaris, and George Em Karniadakis. Physics informed deep learning (part i): Data-driven solutions of nonlinear partial differential equations. ArXiv preprint arXiv:1711.10561, 2017a.
- Maziar Raissi, Paris Perdikaris, and George Em Karniadakis. Physics informed deep learning (part ii): Data-driven discovery of nonlinear partial differential equations. ArXiv preprint arXiv:1711.10566, 2017b.
- Yunjin Tong, Shiying Xiong, Xingzhe He, Guanghan Pan, and Bo Zhu. Symplectic neural networks in taylor series form for hamiltonian systems. *arXiv preprint arXiv:2005.04986*, 2020.
- Peter Toth, Danilo Jimenez Rezende, Andrew Jaegle, Sébastien Racanière, Aleksandar Botev, and Irina Higgins. Hamiltonian generative networks. *arXiv preprint arXiv:1909.13789*, 2019.
- Yaofeng Desmond Zhong, Biswadip Dey, and Amit Chakraborty. Symplectic ode-net: Learning hamiltonian dynamics with control. *arXiv preprint arXiv:1909.12077*, 2019.