3.2-INCH ESP32 TOUCH DISPLAY

Assembly and wiring guide


Step-by-step guide to assembling the 3.2-inch ESP32 touchscreen with a push button.



COMPONENTS


- 3.2-inch ESP32 touchscreen board
- 3D-printed case (front, back and stand)
- Push button with red cap
- USB-C cable
- Male-to-female Dupont jumper wires
- 4 M2 screws


1. 3D-PRINTED CASE PARTS

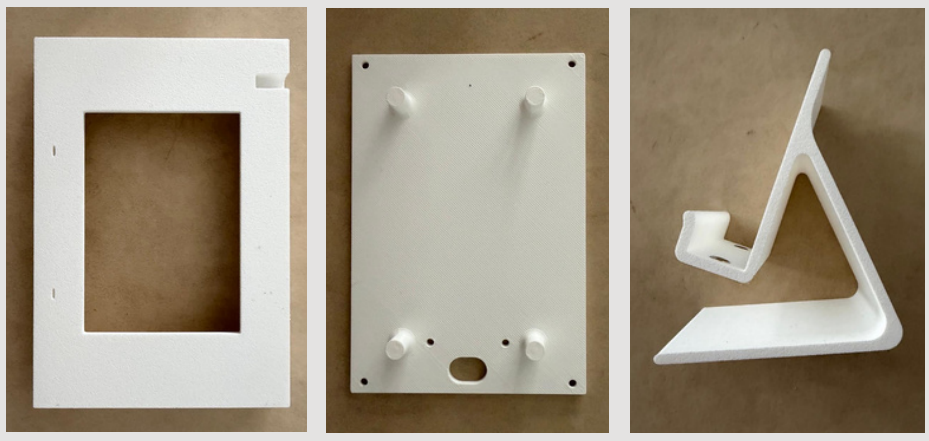


Front Back Stand

2. COMPONENTS AND WIRING

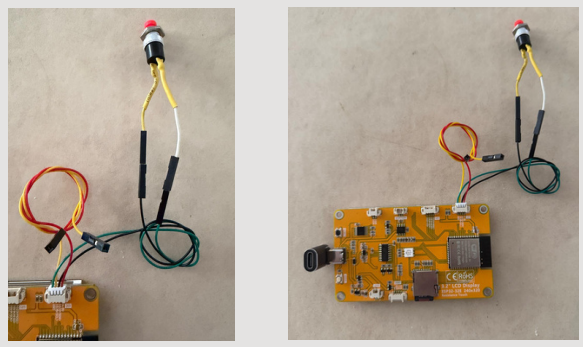


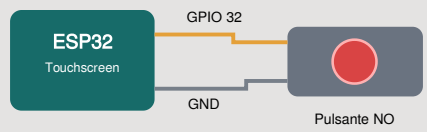

3. WIRING AND INSTALLATION IN THE CASE

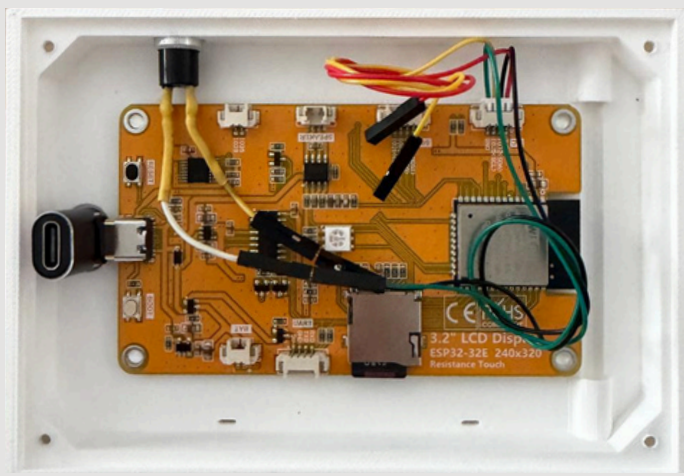

4. MAGNETIC LOCKING SYSTEM

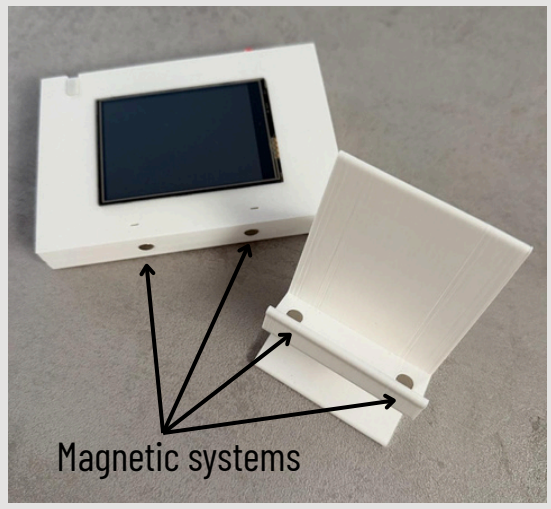

5. STAND AND FINAL ASSEMBLY



TIPS

- Use jumper wires of suitable length.
- Secure cables to prevent movement.
- The push button supports custom functions (e.g. standby or reset).
- The 3D-printed case is secured with M2 screws for stability.

NOTE

The push button is connected to GPIO 32.
You can change the GPIO pin in your code as needed.

WARNING

Power the device using only 5V via USB-C.

ENJOY YOUR BUILD!

Enjoy your 3.2-inch ESP32 touchscreen!