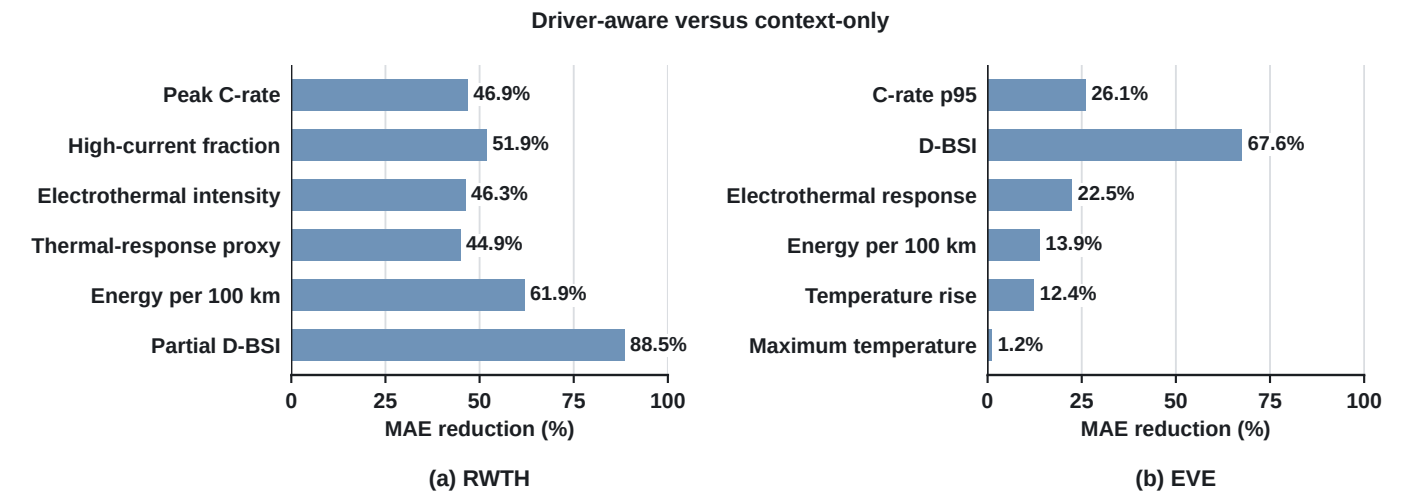
Driver-aware versus context-only
Peak C-rate
46.9%
High-current fraction
51.9%
Electrothermal intensity
46.3%
Thermal-response proxy
44.9%
Energy per 100 km
61.9%
Partial D-BSI
88.5%
0
25
50
75
100
MAE reduction (%)
(a) RWTH
C-rate p95
26.1%
D-BSI
67.6%
Electrothermal response
22.5%
Energy per 100 km
13.9%
Temperature rise
12.4%
Maximum temperature
1.2%
0
25
50
75
100
MAE reduction (%)
(b) EVE