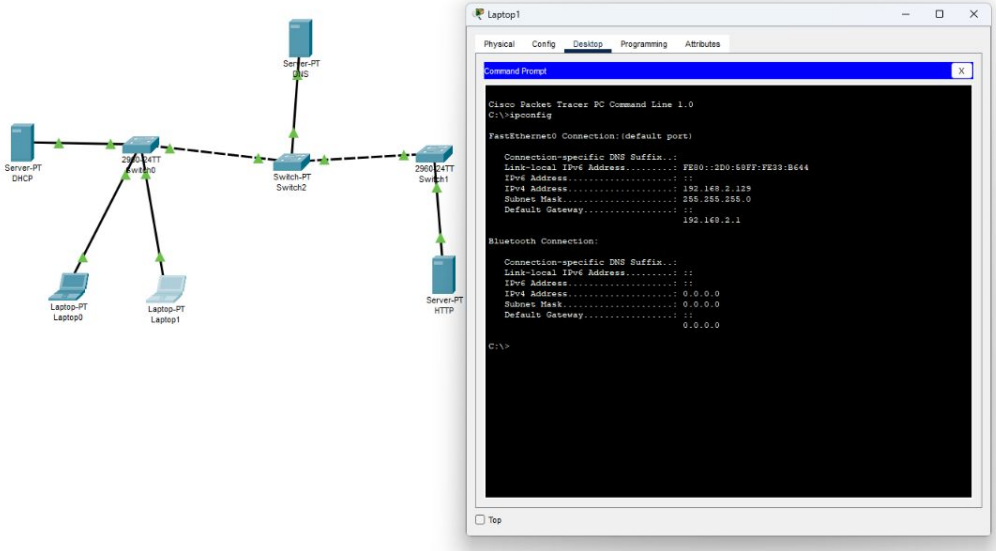
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Laptop-PT Laptop0
Laptop-PT Laptop1
Server-PT HTTP
Laptop1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::2D0:58FF:FE33:B644
IPv6 Address.....: ::
IPv4 Address.....: 192.168.2.129
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
192.168.2.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>
Top

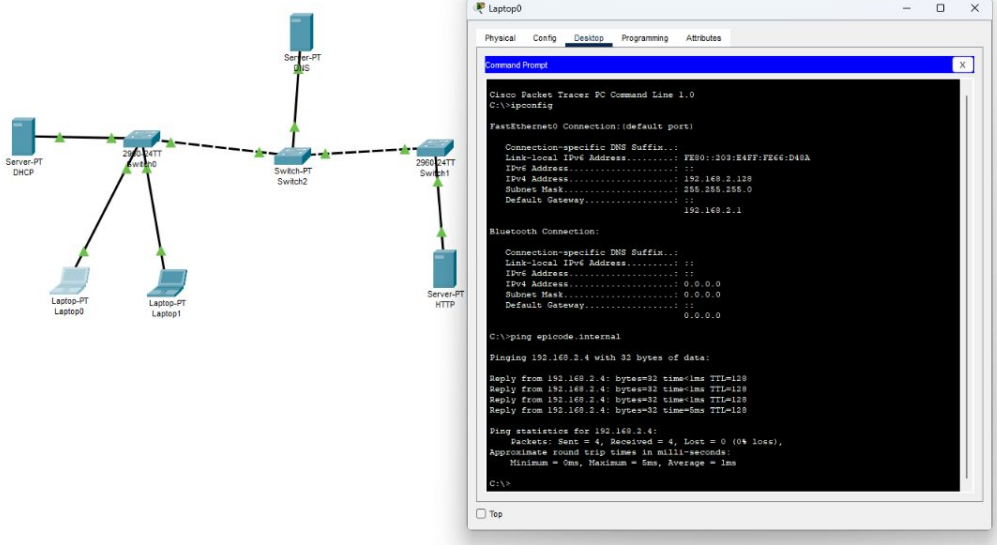
Cisco Packet Tracer - C:\Users\malin\Cisco Packet Tracer 8.2.2\saves\W2D4.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Server-PT HTTP
Laptop-PT Laptop0
Laptop-PT Laptop1
Laptop0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: FE80::203:E4FF:FE66:D48A
IPv6 Address.....: ::
IPv4 Address.....: 192.168.2.128
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
192.168.2.1
Bluetooth Connection:
Connection-specific DNS Suffix..:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
0.0.0.0
C:\>ping epicode.internal
Pinging 192.168.2.4 with 32 bytes of data:
Reply from 192.168.2.4: bytes=32 time<1ms TTL=128
Reply from 192.168.2.4: bytes=32 time<1ms TTL=128
Reply from 192.168.2.4: bytes=32 time<1ms TTL=128
Reply from 192.168.2.4: bytes=32 time=5ms TTL=128
Ping statistics for 192.168.2.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 5ms, Average = 1ms
C:\>
Top
Time: 00:23:04
Realtime
Scenario 0
New
Delete
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

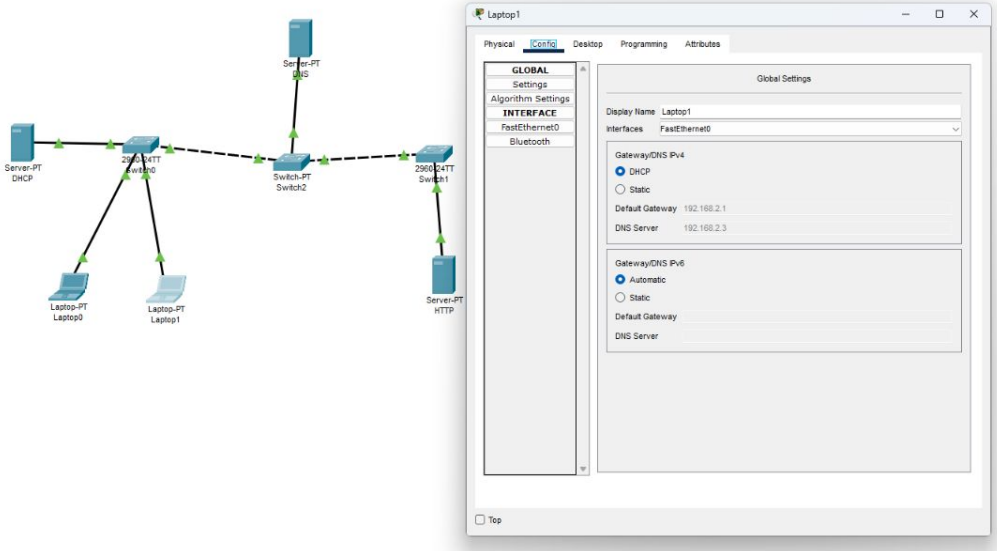
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Laptop-PT Laptop0
Laptop-PT Laptop1
Server-PT HTTP
Laptop1
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
Bluetooth
Global Settings
Display Name Laptop1
Interfaces FastEthernet0
Gateway/DNS IPv4
DHCP
Static
Default Gateway 192.168.2.1
DNS Server 192.168.2.3
Gateway/DNS IPv6
Automatic
Static
Default Gateway
DNS Server
Top

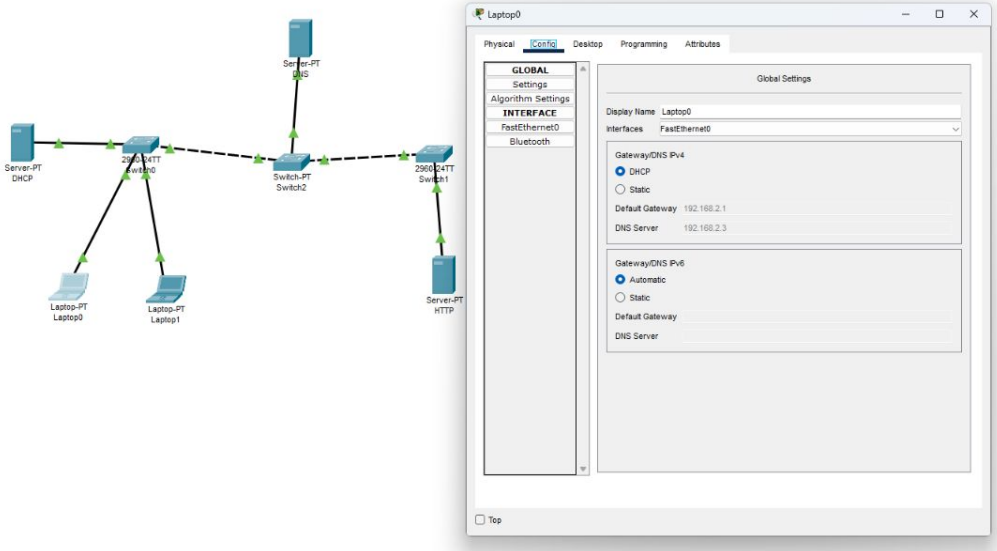
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Laptop-PT Laptop0
Laptop-PT Laptop1
Server-PT HTTP
Laptop0
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
Bluetooth
Global Settings
Display Name Laptop0
Interfaces FastEthernet0
Gateway/DNS IPv4
DHCP
Static
Default Gateway 192.168.2.1
DNS Server 192.168.2.3
Gateway/DNS IPv6
Automatic
Static
Default Gateway
DNS Server
Top

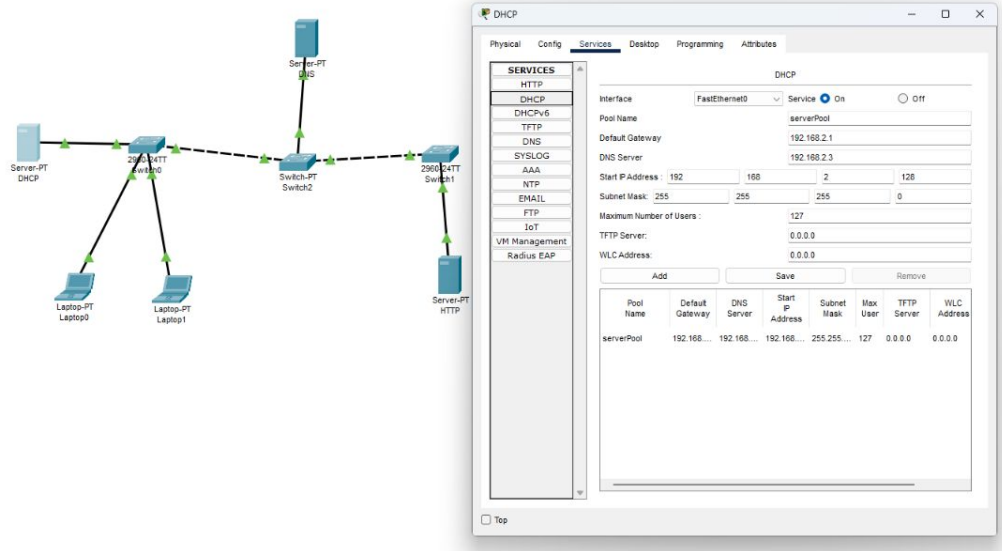
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Laptop-PT Laptop0
Laptop-PT Laptop1
Server-PT HTTP
DHCP
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
DHCP
Interface
FastEthernet0
Service
On
Off
Pool Name
serverPool
Default Gateway
192.168.2.1
DNS Server
192.168.2.3
Start IP Address :
192
168
2
126
Subnet Mask:
255
255
255
0
Maximum Number of Users :
127
TFTP Server:
0.0.0.0
WLC Address:
0.0.0.0
Add
Save
Remove
Pool Name
Default Gateway
DNS Server
Start IP Address
Subnet Mask
Max User
TFTP Server
WLC Address
serverPool
192.168....
192.168....
192.168....
255.255....
127
0.0.0.0
0.0.0.0
Top

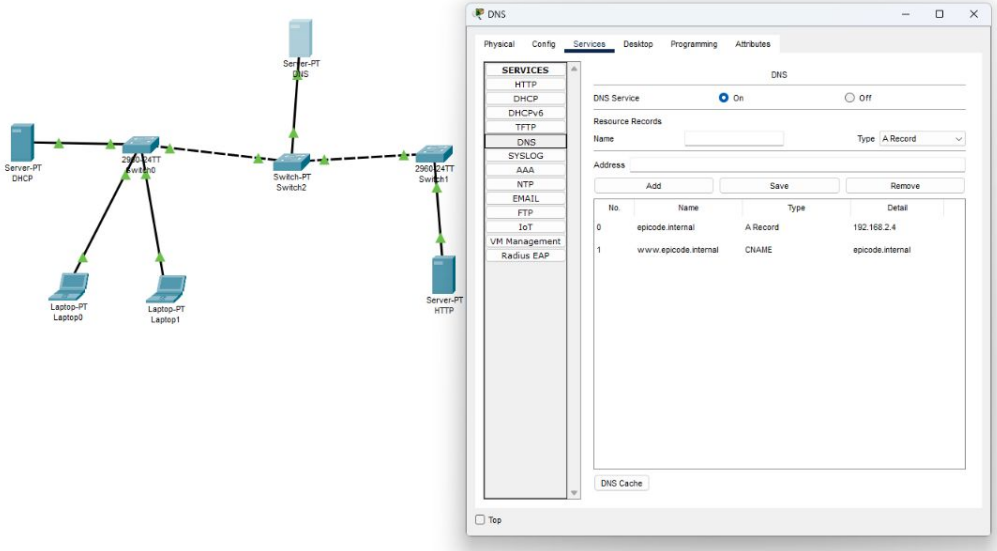
Server-PT
DNS
Server-PT
DHCP
2960-24TT
Switch0
Switch-PT
Switch2
2960-24TT
Switch1
Laptop-PT
Laptop0
Laptop-PT
Laptop1
Server-PT
HTTP
DNS
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
DNS
DNS Service
On
Off
Resource Records
Name
Type
A Record
Address
Add
Save
Remove
No.
Name
Type
Detail
0
epicode.internal
A Record
192.168.2.4
1
www.epicode.internal
CNAME
epicode.internal
DNS Cache
Top

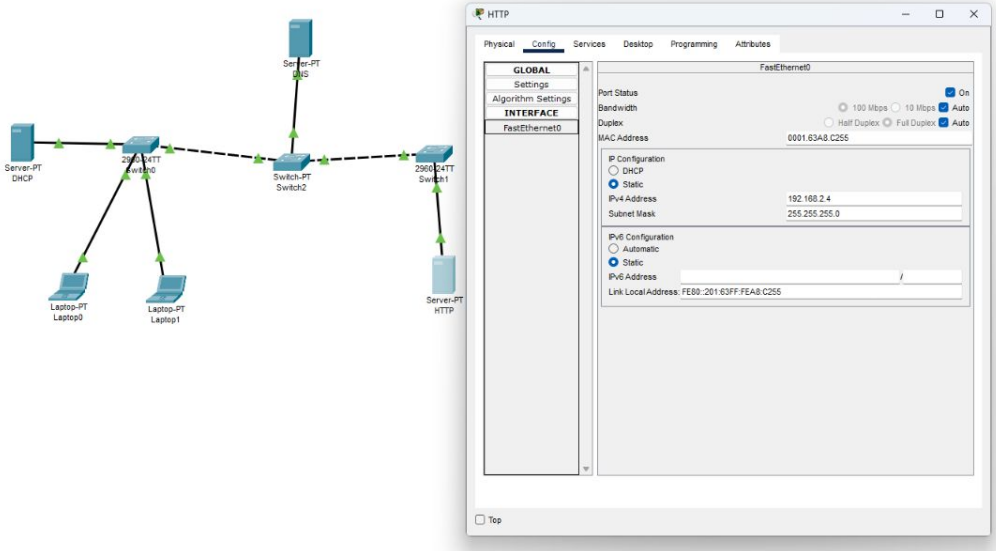
HTTP
Physical
Config
Services
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
FastEthernet0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
0001.63A8.C255
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.4
Subnet Mask
255.255.255.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::201:63FF:FEA8:C255
Top
Server-PT DNS
Server-PT DHCP
2960-24TT Switch0
Switch-PT Switch2
2960-24TT Switch1
Laptop-PT Laptop0
Laptop-PT Laptop1
Server-PT HTTP

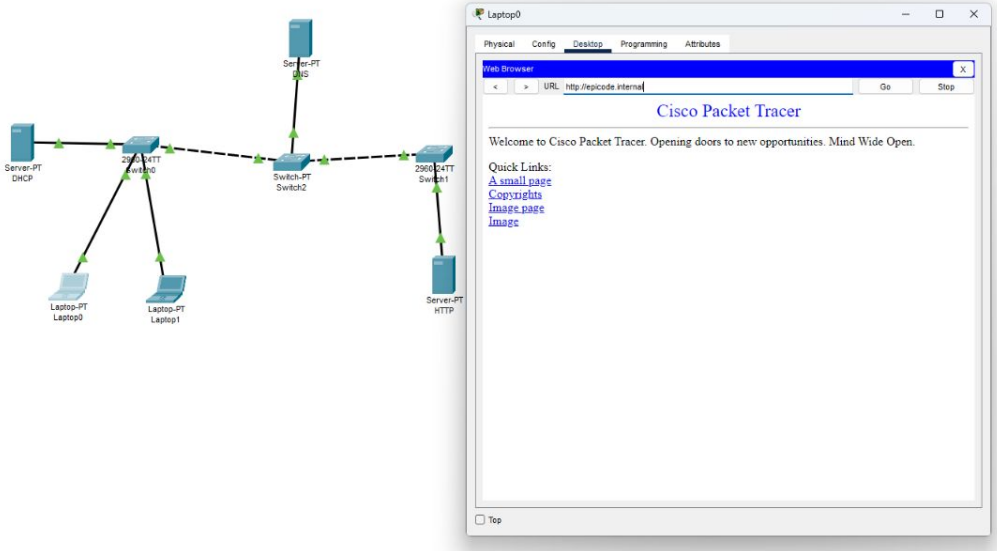
Server-PT
DNS
Server-PT
DHCP
2960-24TT
Switch0
Switch-PT
Switch2
2960-24TT
Switch1
Laptop-PT
Laptop0
Laptop-PT
Laptop1
Server-PT
HTTP
Laptop0
Physical
Config
Desktop
Programming
Attributes
Web Browser
URL
http://epicode.interna
Go
Stop
Cisco Packet Tracer
Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.
Quick Links:
A small page
Copyrights
Image page
Image
Top