Reverse Proxy

Installation des plugins nécessaires

Connecte-toi à ton **OPNsense**.

Va dans **System → Firmware → Plugins**.

Installe le plugin **os-nginx** (c'est lui qui joue le rôle de reverse proxy sous OPNsense).
👉 Contrairement à PfSense qui utilise **Squid**, OPNsense utilise **NGINX** pour le reverse proxy.

Attends la fin de l'installation puis redémarre l'interface Web si demandé.

```
root@OPNsense:~ # pkg install os-nginx
```

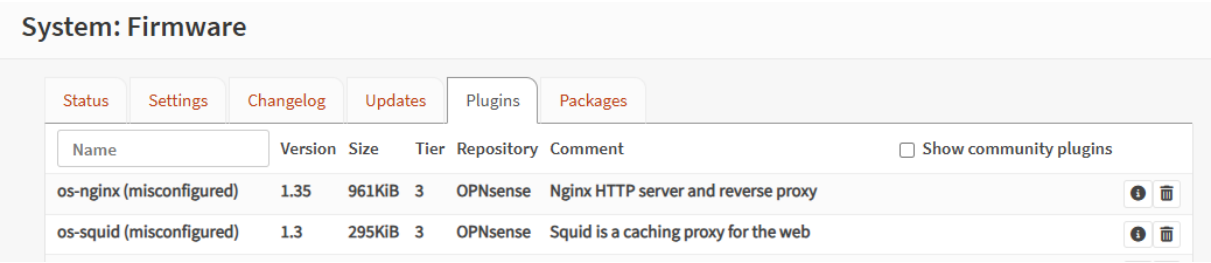

Configuration du Reverse Proxy

Activer NGINX

Va dans Services → NGINX → Configuration générale.

Coche Enable NGINX.

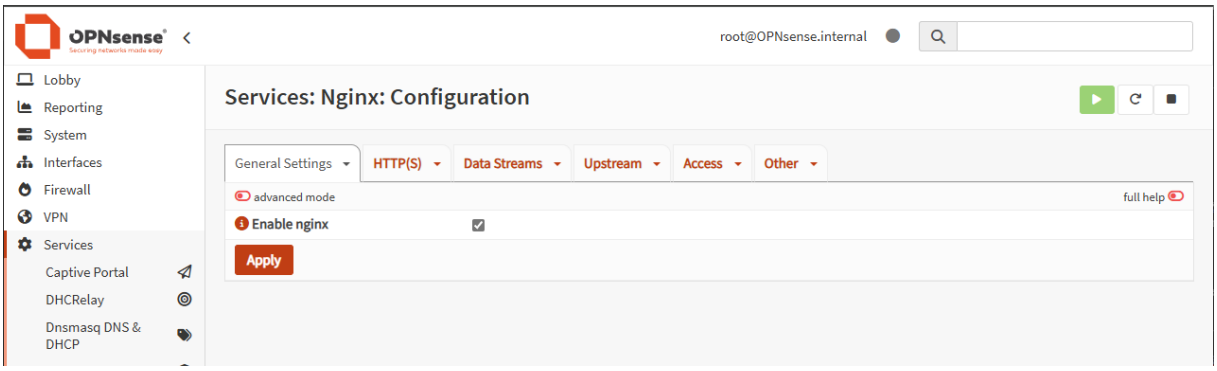

Sélectionne l’interface WAN.

Dans le champ Listening Port, choisis un port > 1023 (exemple : `8000`).

Sauvegarde puis applique.

Edit HTTP Server

advanced mode

HTTP Listen Address	192.168.99.200:8000 × Clear All Copy Paste Text
HTTPS Listen Address	192.168.99.200:8000 × Clear All Copy Paste Text
Default Server	☐
Server Name	 Clear All Copy Paste Text
Locations	Nothing selected Clear All Select All
URL Rewriting	Nothing selected Clear All Select All
File System Root	
TLS Certificate	None
Client CA Certificate	Nothing selected Clear All Select All
Access Log Format	Default
Enable Let's Encrypt Plugin Support	☑
Charset	None
HTTPS Only	☐
IP ACL	None
Advanced ACL Authentication Backend	None
Security Header	None
Limit Requests	Nothing selected Clear All Select All
Error Pages	Nothing selected Clear All Select All

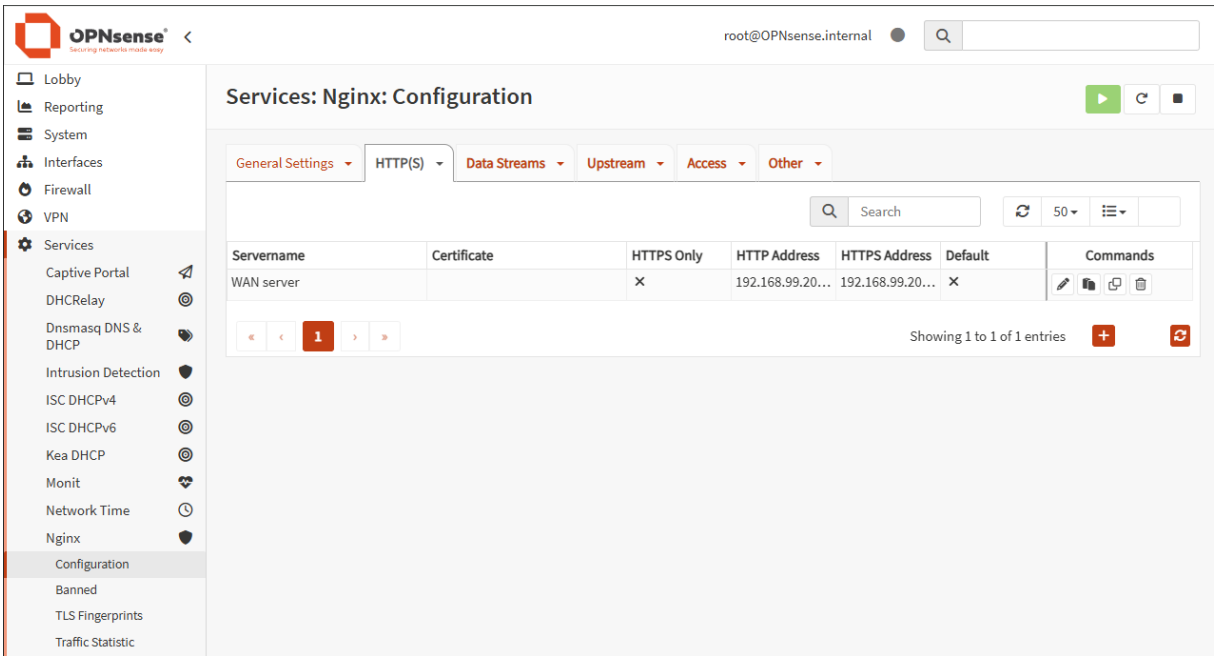

Déclarer les serveurs Web internes

Menu : Services → NGINX → Upstream servers.

Clique sur + Add.

Remplis :

Description : Nom du serveur (ex: `web1`).

Server IP : Adresse IP du serveur interne.

Server Port : 80 (ou celui de ton serveur web).

Enable : coché.

Sauvegarde.

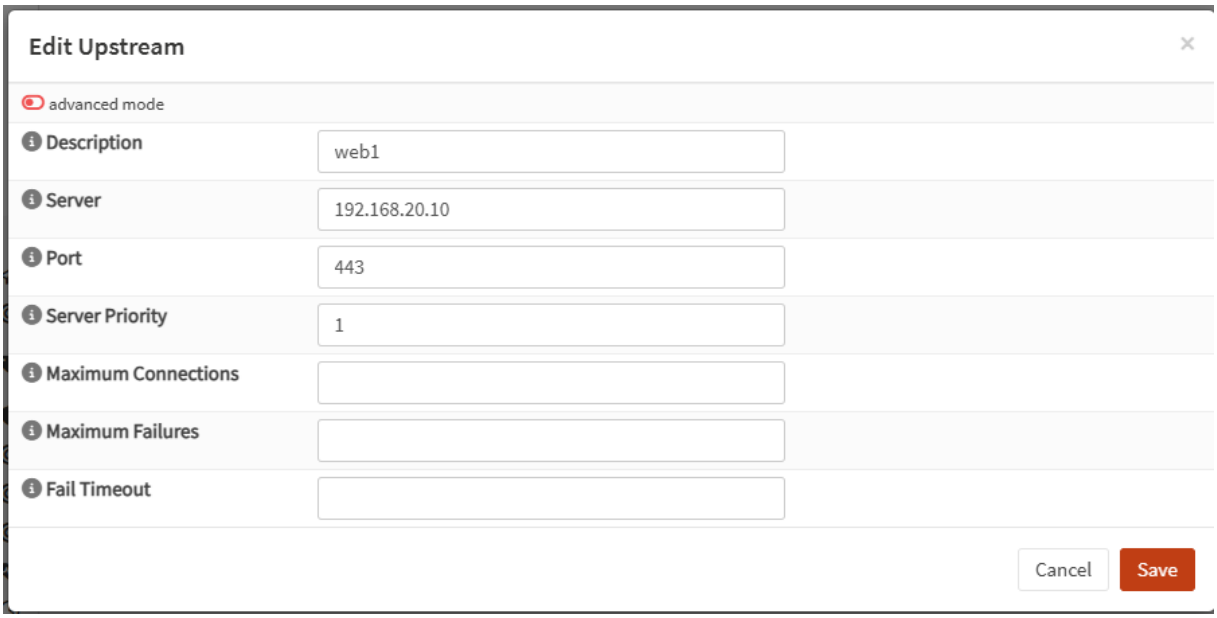

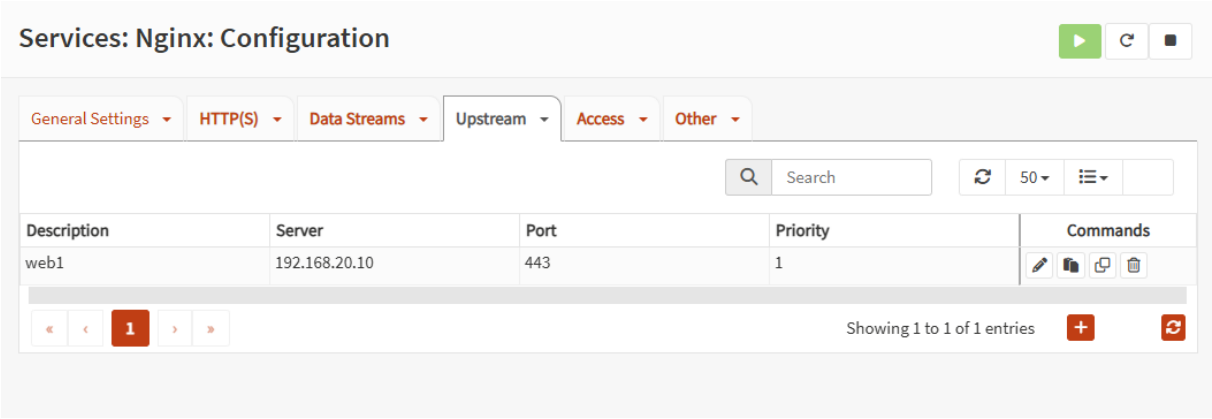

Ensuite on va dans upstream afin de pouvoir relier notre serveur web à un upstream via server entries qui correspond à notre serveur web local qu'on a ajouté précédemment :

Edit Upstream

advanced mode | full help

Description	web1
Server Entries	web1 Clear All Select All
Load Balancing Algorithm	Weighted Round Robin
PROXY Protocol	☑
Keepalive	
Keepalive requests	
Keepalive timeout	
Host header port	
XFH: Use original Host header	☐
Enable TLS (HTTPS)	☐
TLS: Client Certificate	None
TLS: Servername override	
TLS: Supported Versions	Nothing selected Clear All Select All
TLS: Session Reuse	☑
TLS: Trusted Certificate	Nothing selected Clear All Select All
TLS: Verify Certificate	☑
TLS: Verify Depth	
Store	☐

Cancel Save

Services: Nginx: Configuration

General Settings | HTTP(S) | Data Streams | Upstream | Access | Other

Search 50

Description	Servers	TLS Enabled	Commands
web1	web1	✕	

« ‹ 1 › »

Showing 1 to 1 of 1 entries

Créer les "Locations" (équivalent Mappings sur PfSense)

Va dans Services → NGINX → HTTP Server Locations.

Clique sur + Add.

Remplis :

Description : ex `site1`.

Upstream : choisis `web1`.

URL Pattern : entre le domaine (par ex. `site1.mondomaine.com`).

Enable : coché.

Sauvegarde.

Edit Location

advanced mode | full help

Description	site1
URL Pattern	site1.mondomaine.com
Match Type	None
URL Rewriting	Nothing selected Clear All Select All
Enable Security Rules	☐
Learning Mode	☐
Violation Error Page	None
Block XSS Score	
Block SQL Injection Score	
Custom Security Policy	Nothing selected Clear All Select All
Upstream Servers	web1
Path Prefix	
Cache: Directory	None
Cache: Use Stale	Nothing selected Clear All Select All
Cache: Minimum Uses	1
Cache: Force basic caching time	
Cache: Force custom caching times	Nothing selected Clear All Select All
Cache: Background Update	☐
Cache: Lock Backend on Update	☐
Cache: Revalidate	☐
Cache: HTTP Verbs	Nothing selected Clear All Select All
Limit Requests	Nothing selected

Cancel Save

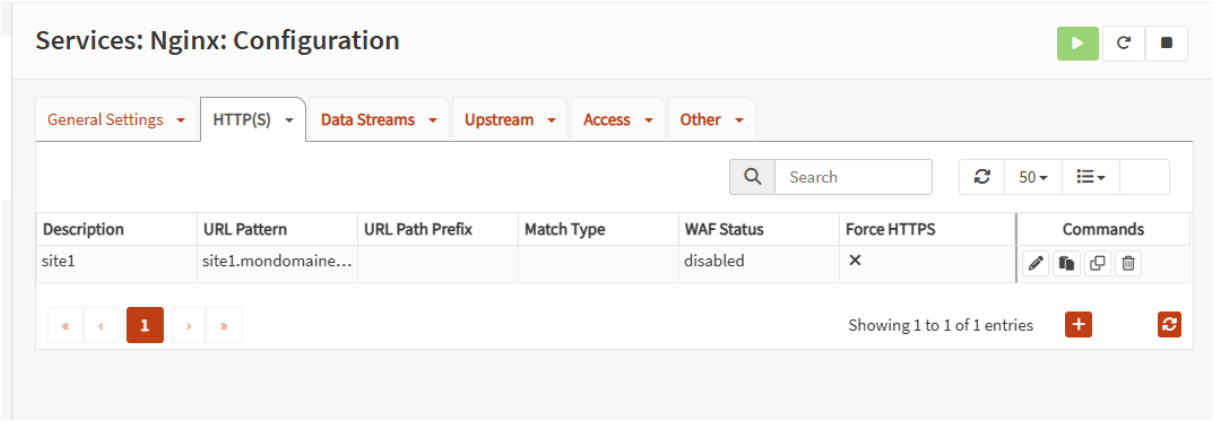

Associer les "Virtual Servers"

Va dans Services → NGINX → HTTP Server.

Clique sur + Add.

Configure :

Description : Reverse Proxy.

Listen Port : `8000`.

Listen Addresses : sélectionne WAN.

Locations : ajoute ta location (`site1`).

Sauvegarde et applique.

Edit HTTP Server

advanced mode | full help

HTTP Listen Address	192.168.99.200:8000 × Clear All Copy Paste Text
HTTPS Listen Address	192.168.99.200:8000 × Clear All Copy Paste Text
Default Server	☑
Reject SSL Handshake	☐
SYSLOG targets	Nothing selected Clear All Select All
PROXY Protocol	☐
Trusted Proxies	 Clear All Copy Paste Text
Trusted Proxies (Firewall Alias)	None
Real IP Source	None
Server Name	ReverseProxy × Clear All Copy Paste Text
Locations	site1 Clear All Select All
URL Rewriting	Nothing selected Clear All Select All
File System Root	
Maximum Body Size	
Body Buffer Size	
TLS Certificate	None
Client CA Certificate	Nothing selected Clear All Select All
Verify Client Certificate	Off
Zero RTT	☐
Access Log Format	Default

Cancel Save

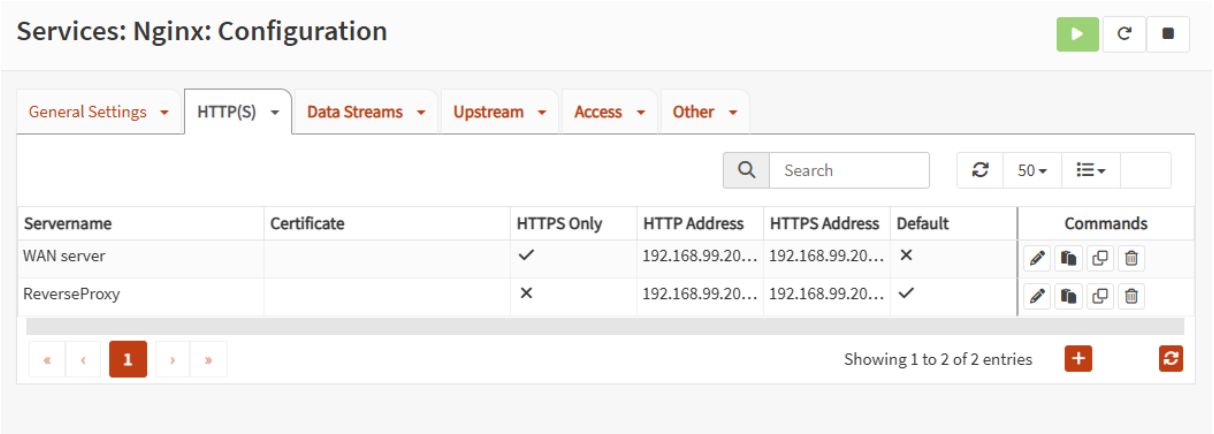

Redirection du trafic (NAT)

Comme ton reverse proxy écoute sur `8000`, il faut rediriger le port 80 externe → port 8000 interne.

Va dans **Firewall → NAT → Port Forward**.

Clique sur **+ Add**.

Configure :

Interface : WAN.

Protocol : TCP.

Destination Port Range : `80`.

Redirect Target IP : IP WAN du firewall.

Redirect Target Port : `8000`.

NAT reflection : activé si besoin.

Sauvegarde et applique.

Firewall: NAT: Port Forward

Edit Redirect entry — full help

Disabled	☐ Disable this rule
No RDR (NOT)	☐
Interface	WAN
TCP/IP Version	IPv4
Protocol	TCP
Source	Advanced
Destination / Invert	☐
Destination	WAN address
Destination port range	from: HTTP — to: HTTP
Redirect target IP	Single host or Network: 192.168.99.200/24
Redirect target port	(other): 8000
Pool Options:	Default
Log	☐ Log packets that are handled by this rule
Category	
Description	HTTP -> NGINX
Set local tag	
Match local tag	
No XMLRPC Sync	☐

OPNsense (c) 2014-2025 Deciso B.V.

☐	↔ WAN	TCP	*	*	WAN address	80 (HTTP)	192.168.99.200/24	8000	HTTP -> NGINX	