



POLITECNICO DI MILANO
SCHOOL OF INDUSTRIAL AND INFORMATION ENGINEERING
Master of Science in Computer Science and Engineering
Software Engineering 2 Mandatory Project

Safe Streets.

Design Document

Authors:

Rosetti Nicola
Sartoni Simone
Torri Vittorio

Academic Year 2019/2020

Milano, 09/12/2019
Version 1.0

Contents

1	Introduction	3
1.1	Purpose	3
1.2	Scope	3
1.3	Definitions,Acronyms,Abbreviations	3
1.4	Reference Documents	4
1.5	Document Structure	4
2	Architectural Design	5
2.1	Overview: High-level components and their interaction	5
2.2	Component view	5
2.3	Deployment view	10
2.4	Runtime view	13
2.5	Component interfaces	20
2.6	Selected architectural styles and patterns	20
2.6.1	Model-View-Controller Pattern	20
2.6.2	Facade Pattern	20
2.6.3	Thin client	21
2.6.4	RESTful architecture	21
2.7	Other design decisions	21
2.7.1	Consistency and update strategies among replicas	21
3	User interface design	22
4	Requirements Traceability	23
5	Implementation, integration and test plan	28
6	Effort spent	29
7	References	31

List of Figures

2.1	UML Component Diagram for <i>Router</i> component	6
2.2	UML Component Diagram	7
2.3	UML Component Diagram for <i>ReportManager</i> component	8
2.4	UML Component Diagram for <i>AccessManager</i> component	9
2.5	UML Component Diagram for <i>StatisticsManager</i> component	9
2.6	UML Component Diagram for <i>DataCollectionManager</i> component	10
2.7	UML Deployment Diagram	11
2.8	Informal architectural view of the system	12
2.9	UML Architectural Sequence Diagram for <i>SendReport</i> use case	14
2.10	UML Architectural Sequence Diagram for <i>UserLogin</i> use case	15
2.11	UML Architectural Sequence Diagram for <i>AgentCheckReport</i> use case	16
2.12	UML Architectural Sequence Diagram for the <i>CheckStatistics</i> use case	17
2.13	UML Architectural Sequence Diagram for <i>User Registration</i>	18
2.14	UML Architectural Sequence Diagram for the <i>Suggestions</i>	19

List of Tables

4.1	Correspondence between goals and world and shared phenoma	23
6.1	Nicola Rosetti's effort table	29
6.2	Simone Sartoni's effort table	29
6.3	Vittorio Torri's effort table	30

1 Introduction

1.1 Purpose

The purpose of this document is to underline and explain in detail what are the design choices for the deployment of the SafeStreet Application. The analysis has been made at different levels to underline different views of the same system. Different levels are identified through the document; here they are just mentioned:

- the high level architecture;
- the components that actually builds the system;
- the deployment view of the system;
- the messages exchanged among the components and the interfaces they offer;
- the pattern and technologies exploited for the system;
- the User Interfaces provided by the system.

1.2 Scope

Here the scope of the system is briefly summarized.

SafeStreets is an application system with them aim to support municipalities in recording parking violations, providing also additional functions for traffic tickets emission, statistics and suggestions.

The citizen can use the mobile app to send reports about parking violations, after having been registered, and to consult statistics about violations and accidents.

Municipality agents can use the web application to receive the reports by the users, analyze them and possibly emit traffic tickets. They can also consult the previously mentioned statistics.

Municipality supervisors can also receive the *suggestions* elaborated by the system to improve the safety on the streets and can also consult reserved statistics, containing personal data about the most egregious offenders.

The system is supported by APIs provided by the municipalities and by APIs provided by a map service, as explained in the RASD and in the following sections of this document.

1.3 Definitions, Acronyms, Abbreviations

- *GPS*: Global Positioning System
- *HTTPS*: HyperText Transmission Protocol over SSL

1.4 Reference Documents

- Assignment Document "SafeStreets Mandatory Project Assignment.pdf"
- RASD Document "RASD1.1.pdf"

1.5 Document Structure

The document is divided into 6 chapters:

- *Chapter 2*: in this chapter are presented all the design choices made the develop the application: the design choices are presented at different levels of abstraction, from the more general and abstract one concerning tiers and system architecture, to the more technical one, concerning the protocol and technologies chosen to deploy the system.
- *Chapter 3*: in this chapter are presented the user interfaces using mockups to represent how they should actually be once implemented: different mockups are presented to cover all possible situation worth to be shown.
- *Chapter 4*: in this chapter the requirements traceability is done. Each requirement described in the RASD is provided by one or more component presented in Chapter 2; in this chapter it's described which components provide what requirements and how this requirement are actually provided.
- *Chapter 5*: this chapter takes into account how the system is going to be implemented, how the components will be integrated and what strategies of testing is going to be used.
- *Chapter 6*: this chapter is only meant to show for each component of the group the effort spent, with associated date and hours.
- *Chapter 7*: in this last chapter are mentioned the references to documents or sites about technologies, pattern and architectures used in this document.

2 Architectural Design

2.1 Overview: High-level components and their interaction

The application will be developed using the client-server paradigm on a three-tiered architecture. The three layers of the application (Presentation, Application and Data) are divided into clusters of machines (i.e. tiers) that actually cooperate to provide a specific functionality. In this case we have three tiers and each tier is responsible for one of the three layers. The client tier is responsible (only) for the **Presentation** layer; therefore, in this architecture, the thin-client has been adopted considering the fact that the required functionalities client-side are limited. The UIs provided are just meant to show results and to allow clients to choose what they want. In particular there are two types of clients: a **mobile app** for the citizen which use SafeStreets to report violations and check statistics information and a **web app** for the police agents and supervisors.

The Application tier takes care of the application layer encapsulating all is needed concerning the application logic. It receives the requests from the clients and handles them. It's also responsible for sending asynchronous notifications to the presentation layer when certain conditions are met. It can also filter requests from the clients, deleting invalid ones.

The **Application** tier communicates with the **Data** tier, responsible for the Data Access layer, that is the tier responsible for accessing the DataBases and performing queries on them.

To provide the required functionalities the system exploits also datawarehousing. The DataWarehouse is a component in the Data tier able to deal with historical data and aggregate data taken from the operational databases in a more efficient way than a traditional dbms.

2.2 Component view

In the figure 2.2 is reported the *Component Diagram* for the *SafeStreets* system. This is a high level view in which the main components are shown, then some components will be better detailed.

In this diagram when two components can communicate using different interfaces a single interface link is reported, for the sake of readability. The various components are now described and detailed:

- **Router**: it has the role of dispatching the requests coming from the users applications. Before doing this it has also the important role of verifying the user authentication, checking the token which is sent with all requests performed by an authenticated user. In figure 2.1 a more detailed view is provided, putting in evidence the various interfaces for the mobile and for the web app.
- **SuggestionsManager** this components is the one which elaborates and provides the *Sug-*

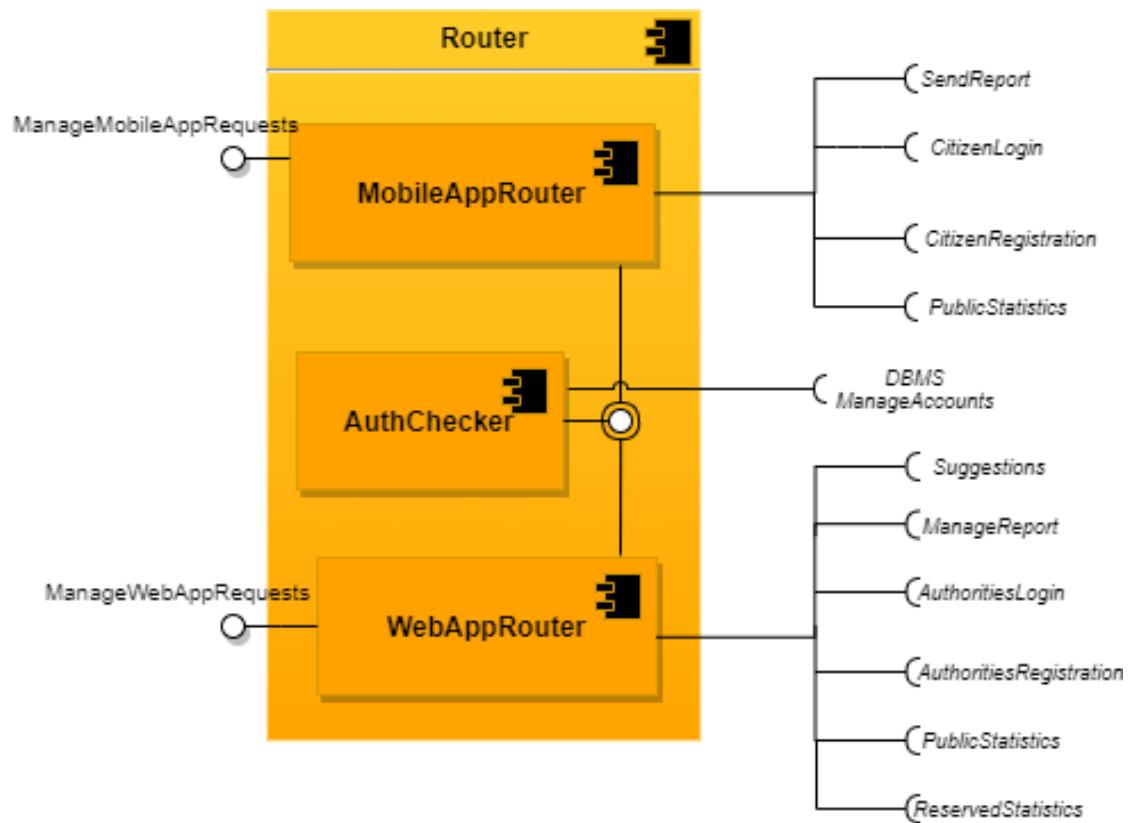


Figure 2.1: UML Component Diagram for *Router* component

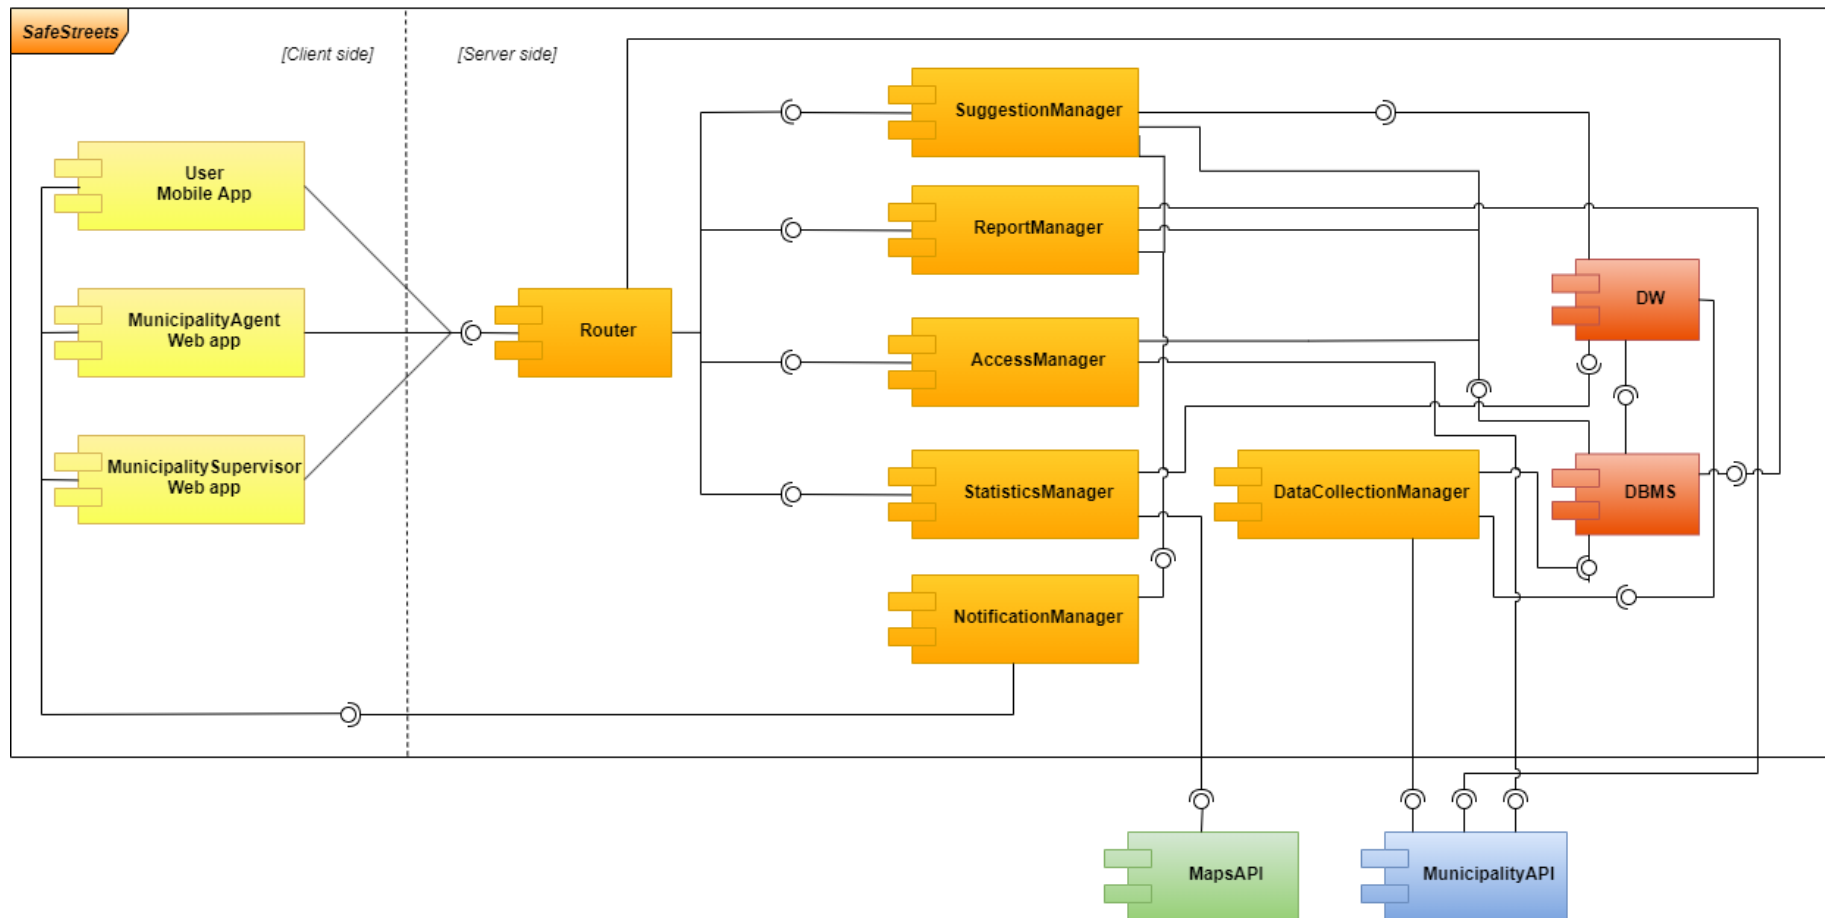


Figure 2.2: UML Component Diagram

gestions for the municipalities. It analyzes the data exploiting the *DataWarehouse* component for the aggregated queries about reports, accidents and tickets and the *DBMS Component* to retrieve non-aggregated information about the streets. It can provide the actual available suggestions for a municipality as an answer to a request coming from the *Router*, but it also notify the *Municipality Supervisor web app* through the *Notification-Manager* component when it discovers a new suggestion (the suggestion discover task is periodically executed, once a month).

- **ReportManager:** this component is in charge of all concern the management of the reports sent by the users. It receives them by the mobile application and execute the automatic analysis to identify possible fake reports, it stores them through the *DBMS Component* and it provides the reports to the the *Municipality Agents web app*, answering to their requests of confirm/enqueue/discard and allowing them to emit a ticket, exploiting the *Municipality APIs* which provide an interface for this service. Its detailed diagram is shown in figure 2.3.

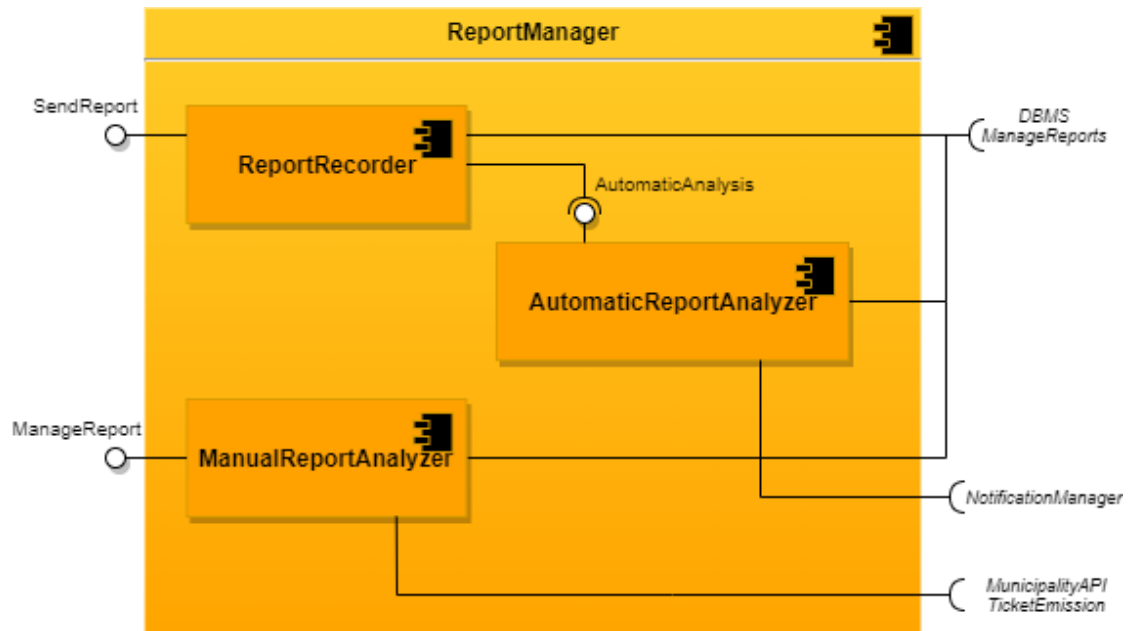


Figure 2.3: UML Component Diagram for *ReportManager* component

- **AccessManager:** it manages everything about registration and login of the users. For the citizens registration it calls the municipality service for the verification of identity cards, while for the agents and supervisors registration it calls the municipality service for their identity verification. He stores the accounts data through the *DBMS* component and it calls it also to verify the correctness of the login credentials. Once a login has been correctly performed it generates a token, stored in the database and sent back to the user, necessary to perform authenticated requests. This component is detailed in figure 2.4.
- **StatisticsManager:** it answers to the statistics requests, both public and reserved, and in doing this it calls the *DataWarehouse* component. It is shown in the diagram in figure 2.6.
- **NotificationManager:** this component is the one able to send push notifications to the user clients, both mobile apps and web apps. It is exploited by the *SuggestionManager* and by the *ReportManager*.
- **DataCollectionManager:** this component periodically retrieves the data made available by the municipality about accidents, tickets and street characteristics. These latter are store in the operational database, while the others are retrieved as aggregated data and so are directly stored in the datawarehouse.

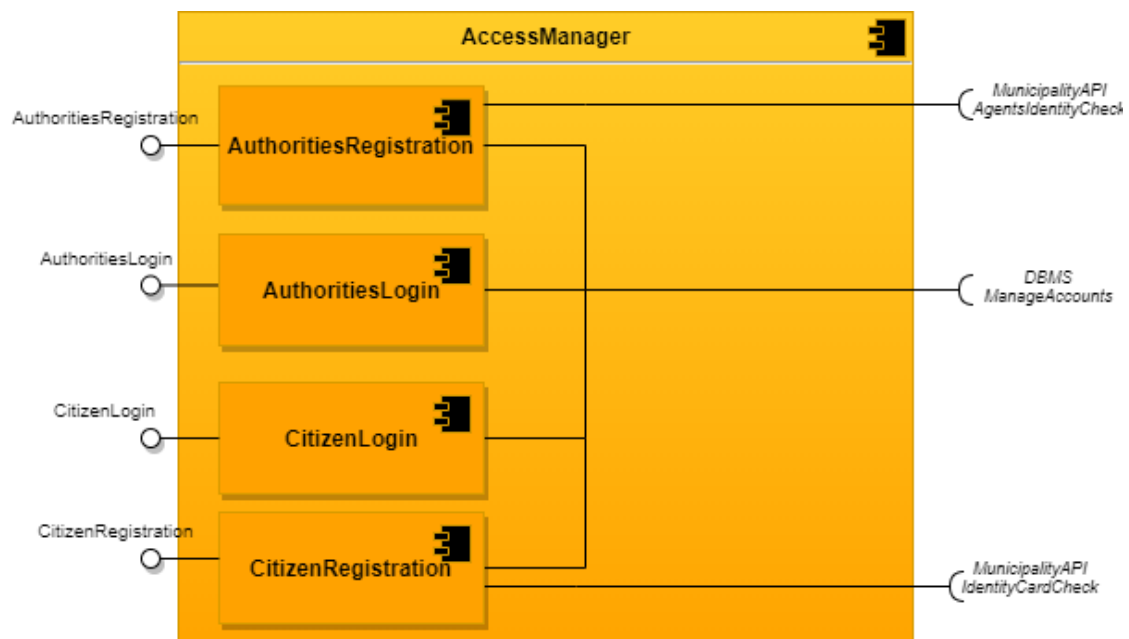


Figure 2.4: UML Component Diagram for *AccessManager* component

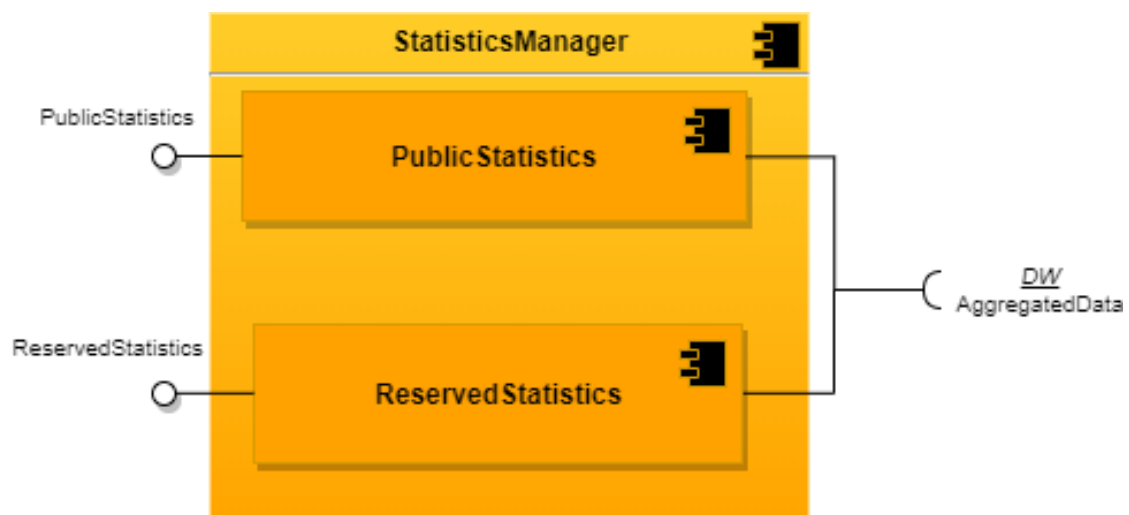


Figure 2.5: UML Component Diagram for *StatisticsManager* component

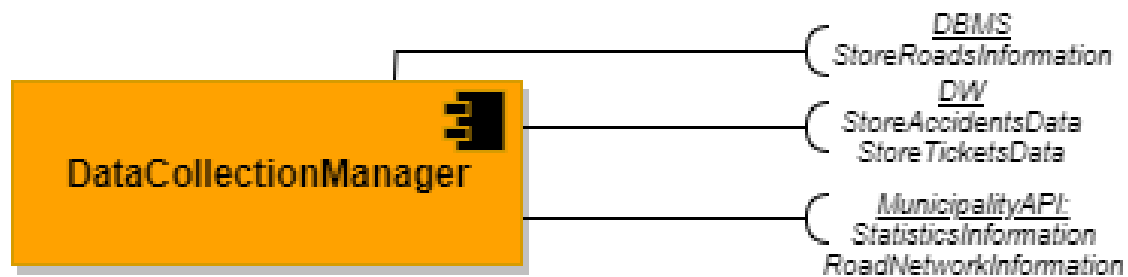


Figure 2.6: UML Component Diagram for *DataCollectionManager* component

- **DBMS**: this component manages the operational database, the main base for the functions of SafeStreets, being in charge of reports, users and streets data.
- **DataWarehouse**: this component manages the datawarehouse, the secondary database for the system, used to answer aggregate queries for statistics and suggestions. It is periodically alimented with the dbms data and with the already aggregated data coming from the municipality through the *DataCollectionManager* component.
- **MunicipalityAPI**: this is an external component, managed by the municipalities (an instance for each of them which supports the system), whose interface is standardized as described in the *Components Interfaces* section. It is necessary to retrieve the data for building statistics and suggestions, to verify the users identity and to have the possibility of traffic ticket emission through SafeStreets.
- **MapsAPI**: this is an external component which is exploited to show maps with the statistics data.
- **UserMobileApp**: this component entirely resides in the *Presentation layer* and it's just an interface to allow the users to use SafeStreets on their mobile devices, sending reports and retrieving statistics information. It performs only minimal controls on the forms before sending them (ex: they are not missing mandatory field).
- **AgentWebApp**: this component is the *Presentation layer* of the web app which allows agents to see the reports, analyze them, emit tickets and retrieve users data.
- **SupervisorWebApp**: this component is the *Presentation layer* of the web app which allows supervisors to see the reports, possibly analyze them, retrieve all type of statistics and receive the suggestions elaborated by the system.

2.3 Deployment view

So far, only an abstract and general view of the system has been provided. In this section a better detailed view of the system shows how the component previously described are actually deployed in different machines and how each tier is organized. Here in figures 2.7 and 2.8 follow two diagrams, the first one is an UML Deployment Diagram which shows the allocation of the software components in the physical tiers of the system, while the second one is an informal diagram which shows more in detailed the network configuration of the system, with hardware devices such as firewalls and load balancers which are not related to the general architecture but are involved in assuring the proper working of the system.

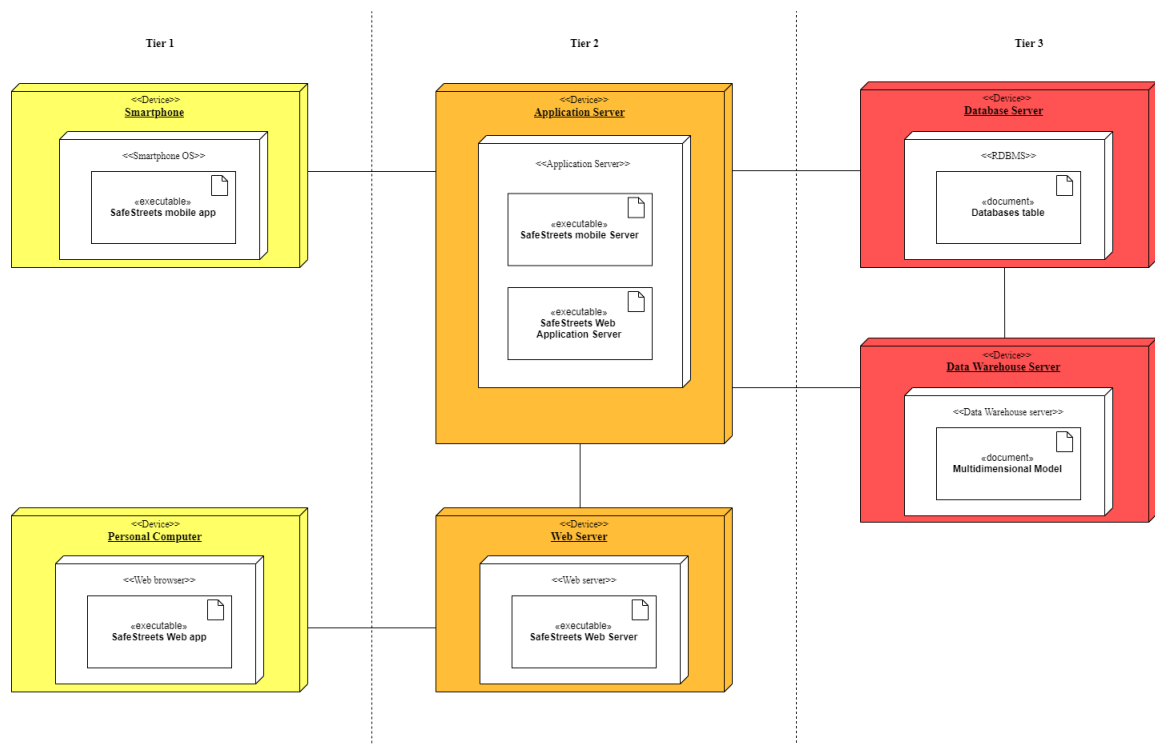


Figure 2.7: UML Deployment Diagram

W.r.t to the component diagram (figure 2.2), the different colors indicate the allocation of components. For the presentation tier clearly the *smartphones* contain the *UserMobileApp* while the *personal computers* and the *web server* contain the *Municipality Agent WebApp* and the *Municipality Supervisor Web App*.

All application logic components (orange in the *Component Diagram*) are deployed on the *Application Server*, while the *DBMS* component is deployed on the *DataBase server* and the *DataWarehouse* component is deployed on the *DataWarehouse server*.

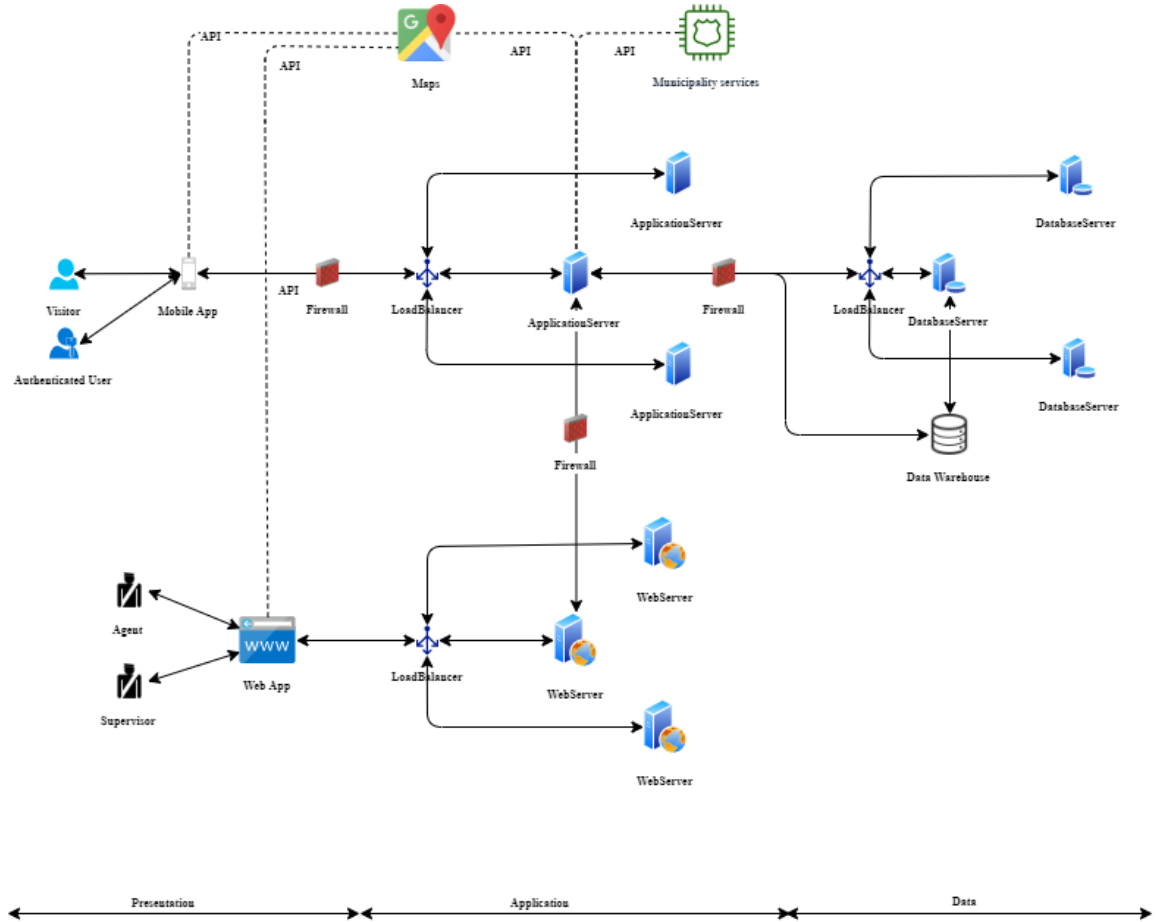


Figure 2.8: Informal architectural view of the system

In the *Mobile App* case the client contains all the *presentation layer* while in the *WebApp* case the layer is splitted between the *MobileApp* and the *WebServer*; the *WebServer* is responsible for contacting the application server and forward the client requests and responses.

All the servers are multiplied, cooperating together to improve performance, scalability, fault tolerance and availability. An elastic component (i.e. load balancer) is used to rule the accesses to different Application, dinamically balancing the load among all the Servers. The same is for the data servers. Each data server is associated with a single replica of the data and exploits the DBMS technology to access the *Database*. The *Database* is fully replicated in different nodes. Techniques and protocols are used to ensure consistency among replicas: they will be full

explained in *Other design decisions* section.

To ensure and improve security firewalls are installed before and after the application servers to filter accesses from external and unsafe networks. By the creation of a *DMZ* (demilitarized zone) external entities can only have access to the exposed services. They will be properly configured to allow only legit requests coming from the Application Servers to reach the Data Servers. All the communications will exploit the HTTPS protocol, unsafe communications will be refused by the firewalls. Security is crucial because the application works mainly with sensible information.

2.4 Runtime view

In the figures 2.9, 2.10, 2.11, 2.12, 2.13 and 2.14 some architectural sequence diagrams are provided, showing the interactions among the different components in the execution of various functions of the systems.


The only methods present here and not mentioned in the *Component Interfaces* section are internal method of a single component.


In the sequence diagram of figure 2.9 is shown what messages are actually exchanged among components to process correctly a report send by a User. The User, through the **Mobile App**, fills the report form and sends it to the server for a confirm. The report is handled at first by the **Router** that checks if the User can actually send reports (i.e. verifies if the corresponding token has the rights needed). If the check is negative, then the request is discarded. Otherwise the **ReportManager** contacts the **MapsAPI** to retrieve the municipality in charge for a specific report. After this, the **ReportManager** checks internally if the pictures in the report have been modified or not. If so, the report is stored as *Refused* and sent to the **Notification Manager**, that will send a notification about the refused report to the involved **MunicipalityAgent Web App**. If the pictures are not fake then the report is stored as *New report* and the **Notification-Manager** will be in charge of notifying the **Municipality Web App** about the new pending report.

It has been assumed that the *getCity* request to the **municipality API** returns a city for which the *SafeStreets service* is active. In effect the mobile app should not allow the user to send a report for a city in which the system is not active.

In the sequence diagram of figure 2.10 are described the components involved in the user login and their interaction. The User fills the spaces in the **Mobile App** inserting his username and password. The login request is then sent to the **Router** that forwards the message to the **AccessManager**. In particular the subcomponent **CitizenLogin** handles the login, asking the **DB** the password corresponding to the specified username. After having received the password, it internally checks if the two passwords (the one coming from the user and the one stored) coincide: if so, the user is successfully logged in and this is notified back to the client, showing him the main page of the App; if not, a notification is sent back to the client, showing him an error message and asking him to insert again username and password. Notice that everytime a new login is performed a new token is generated associated to the specific logged client.

In the sequence diagram of figure 2.11 is shown the managing of a *Report* by an *Agent*. The request of showing the first report to be analyzed comes from the **Agent WebApp** and is received by the **Router** component, which verifies the authentication and forwards it to the **Report-Manager** (in particular the **Manual Report Analyzer** subcomponent). The latter returns the report data to the **WebApp** and then the *Agent* decides what to do. If he wants to issue a

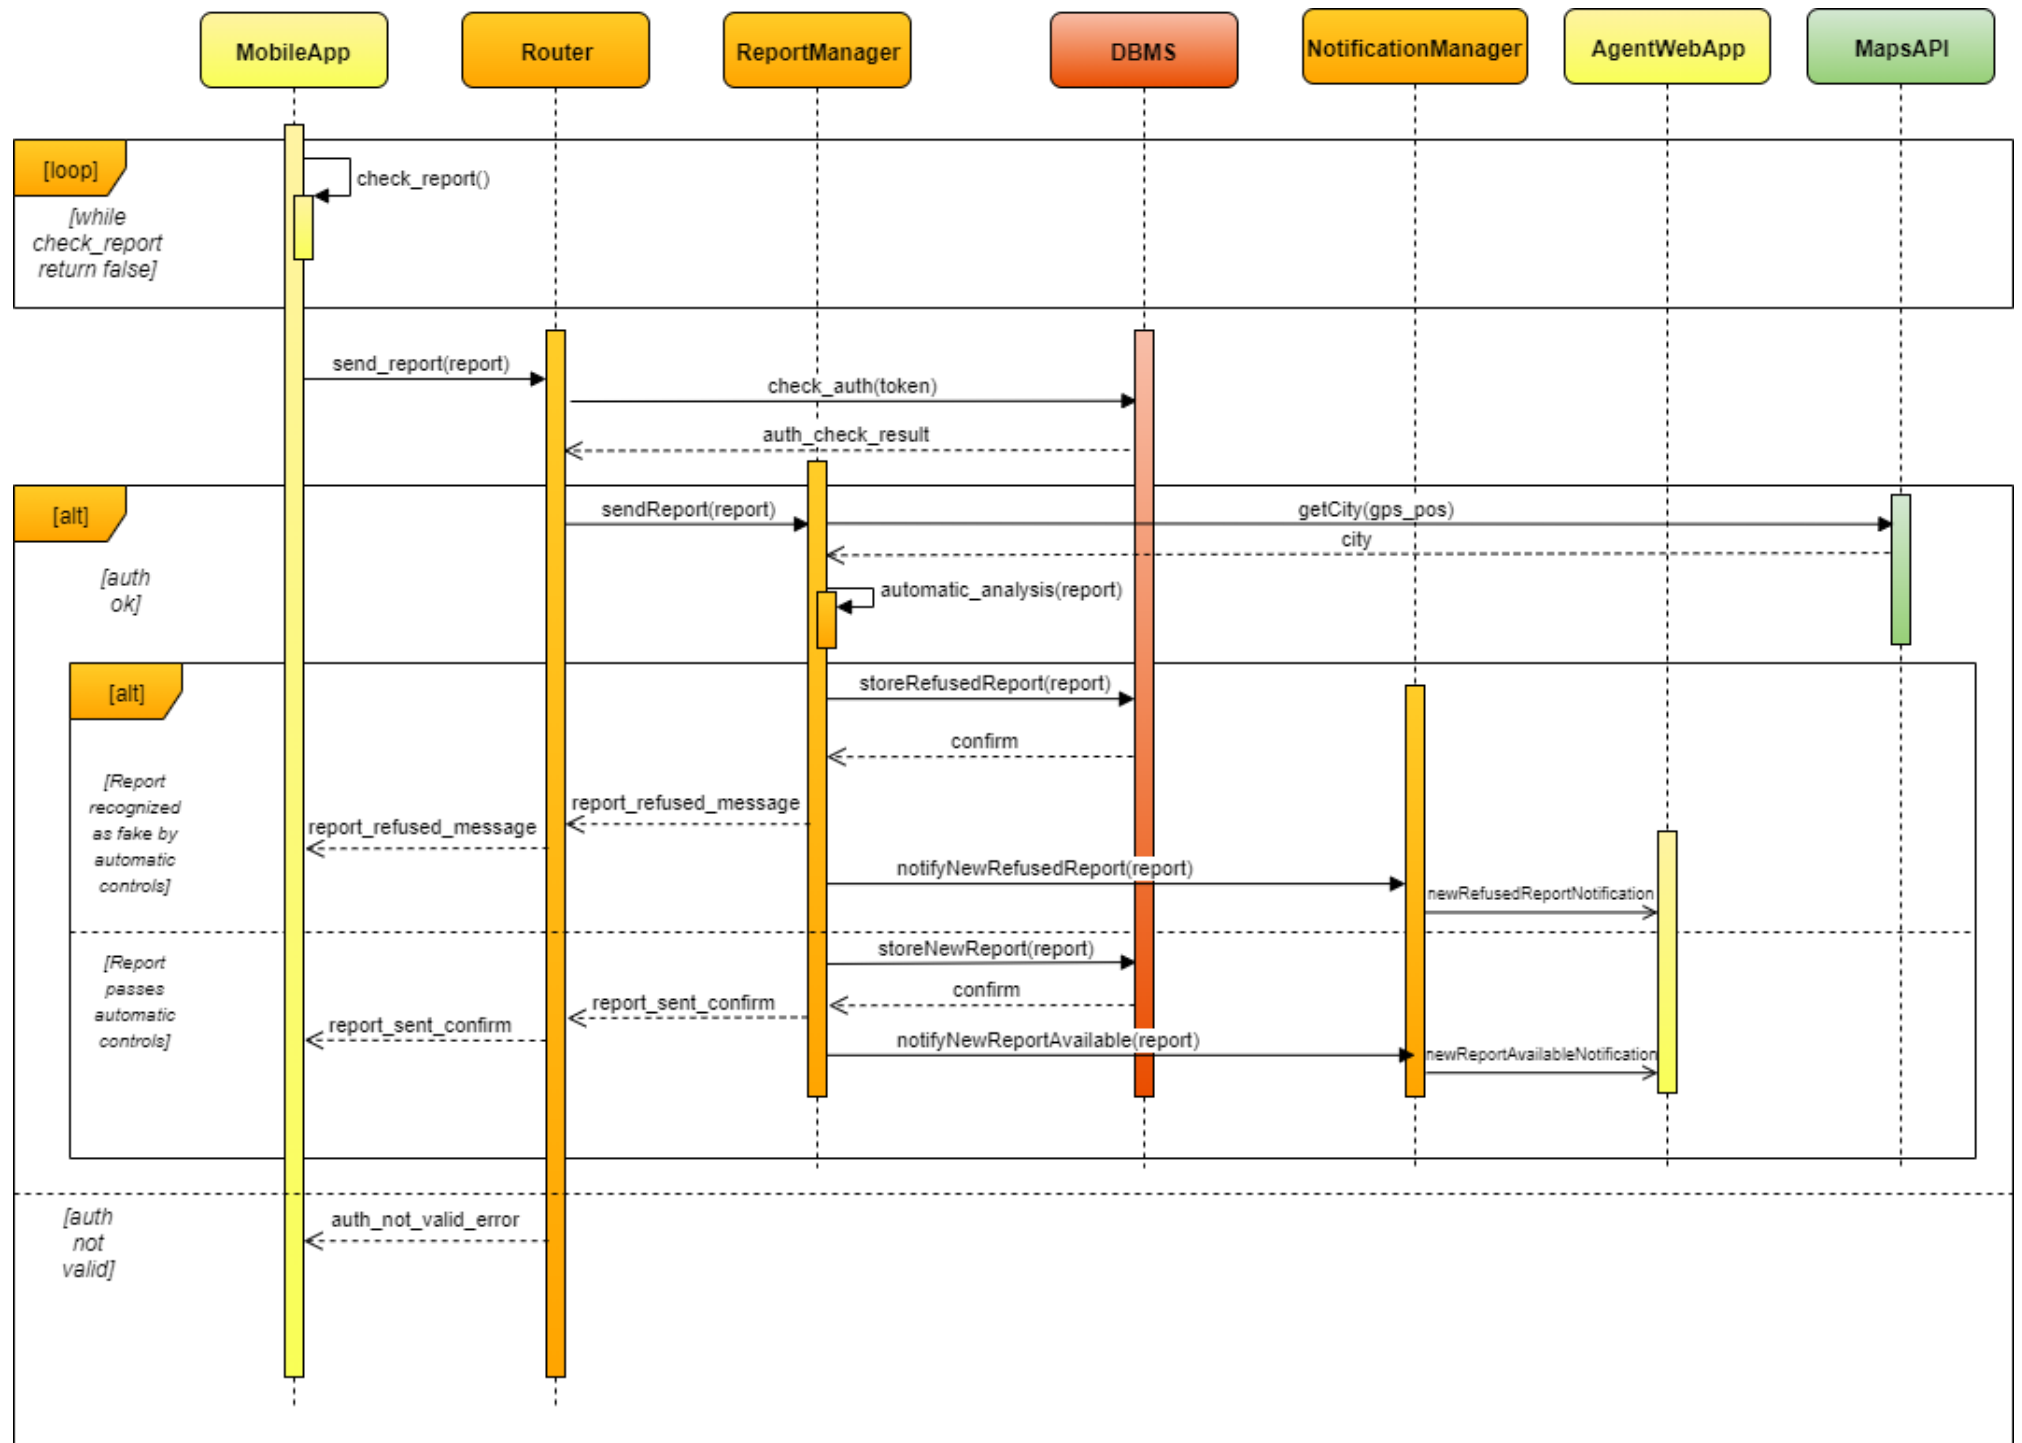Figure 2.9: UML Architectural Sequence Diagram for *SendReport* use case

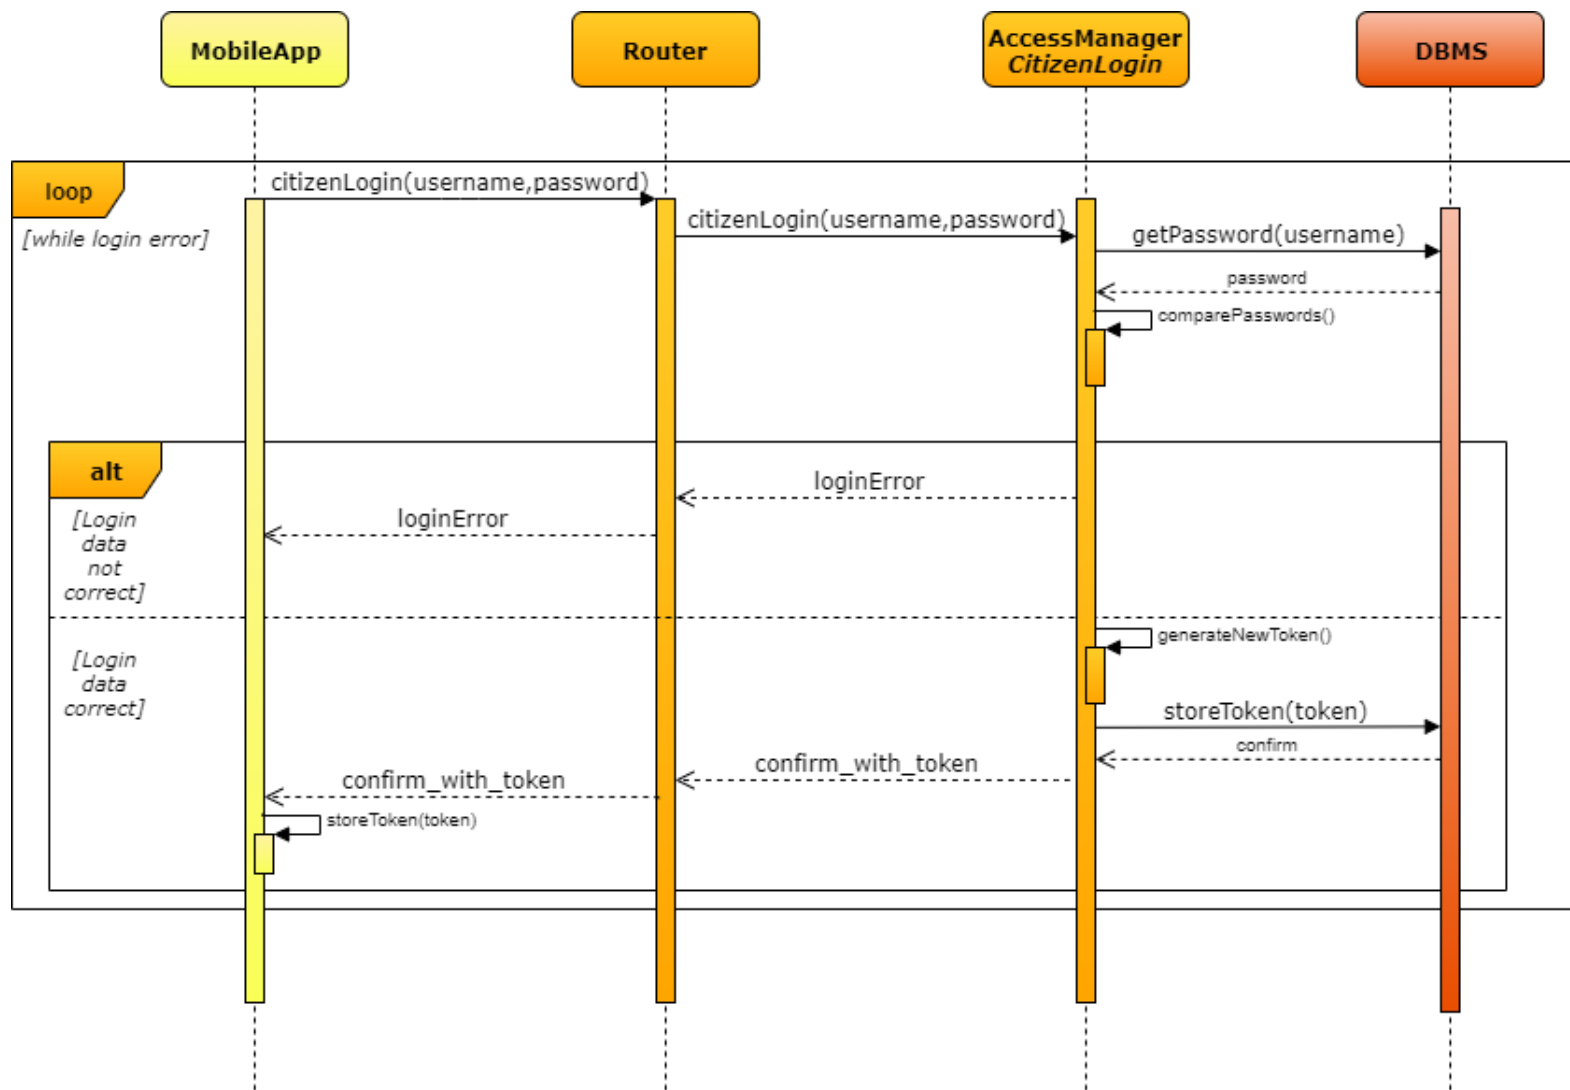Figure 2.10: UML Architectural Sequence Diagram for *UserLogin* use case

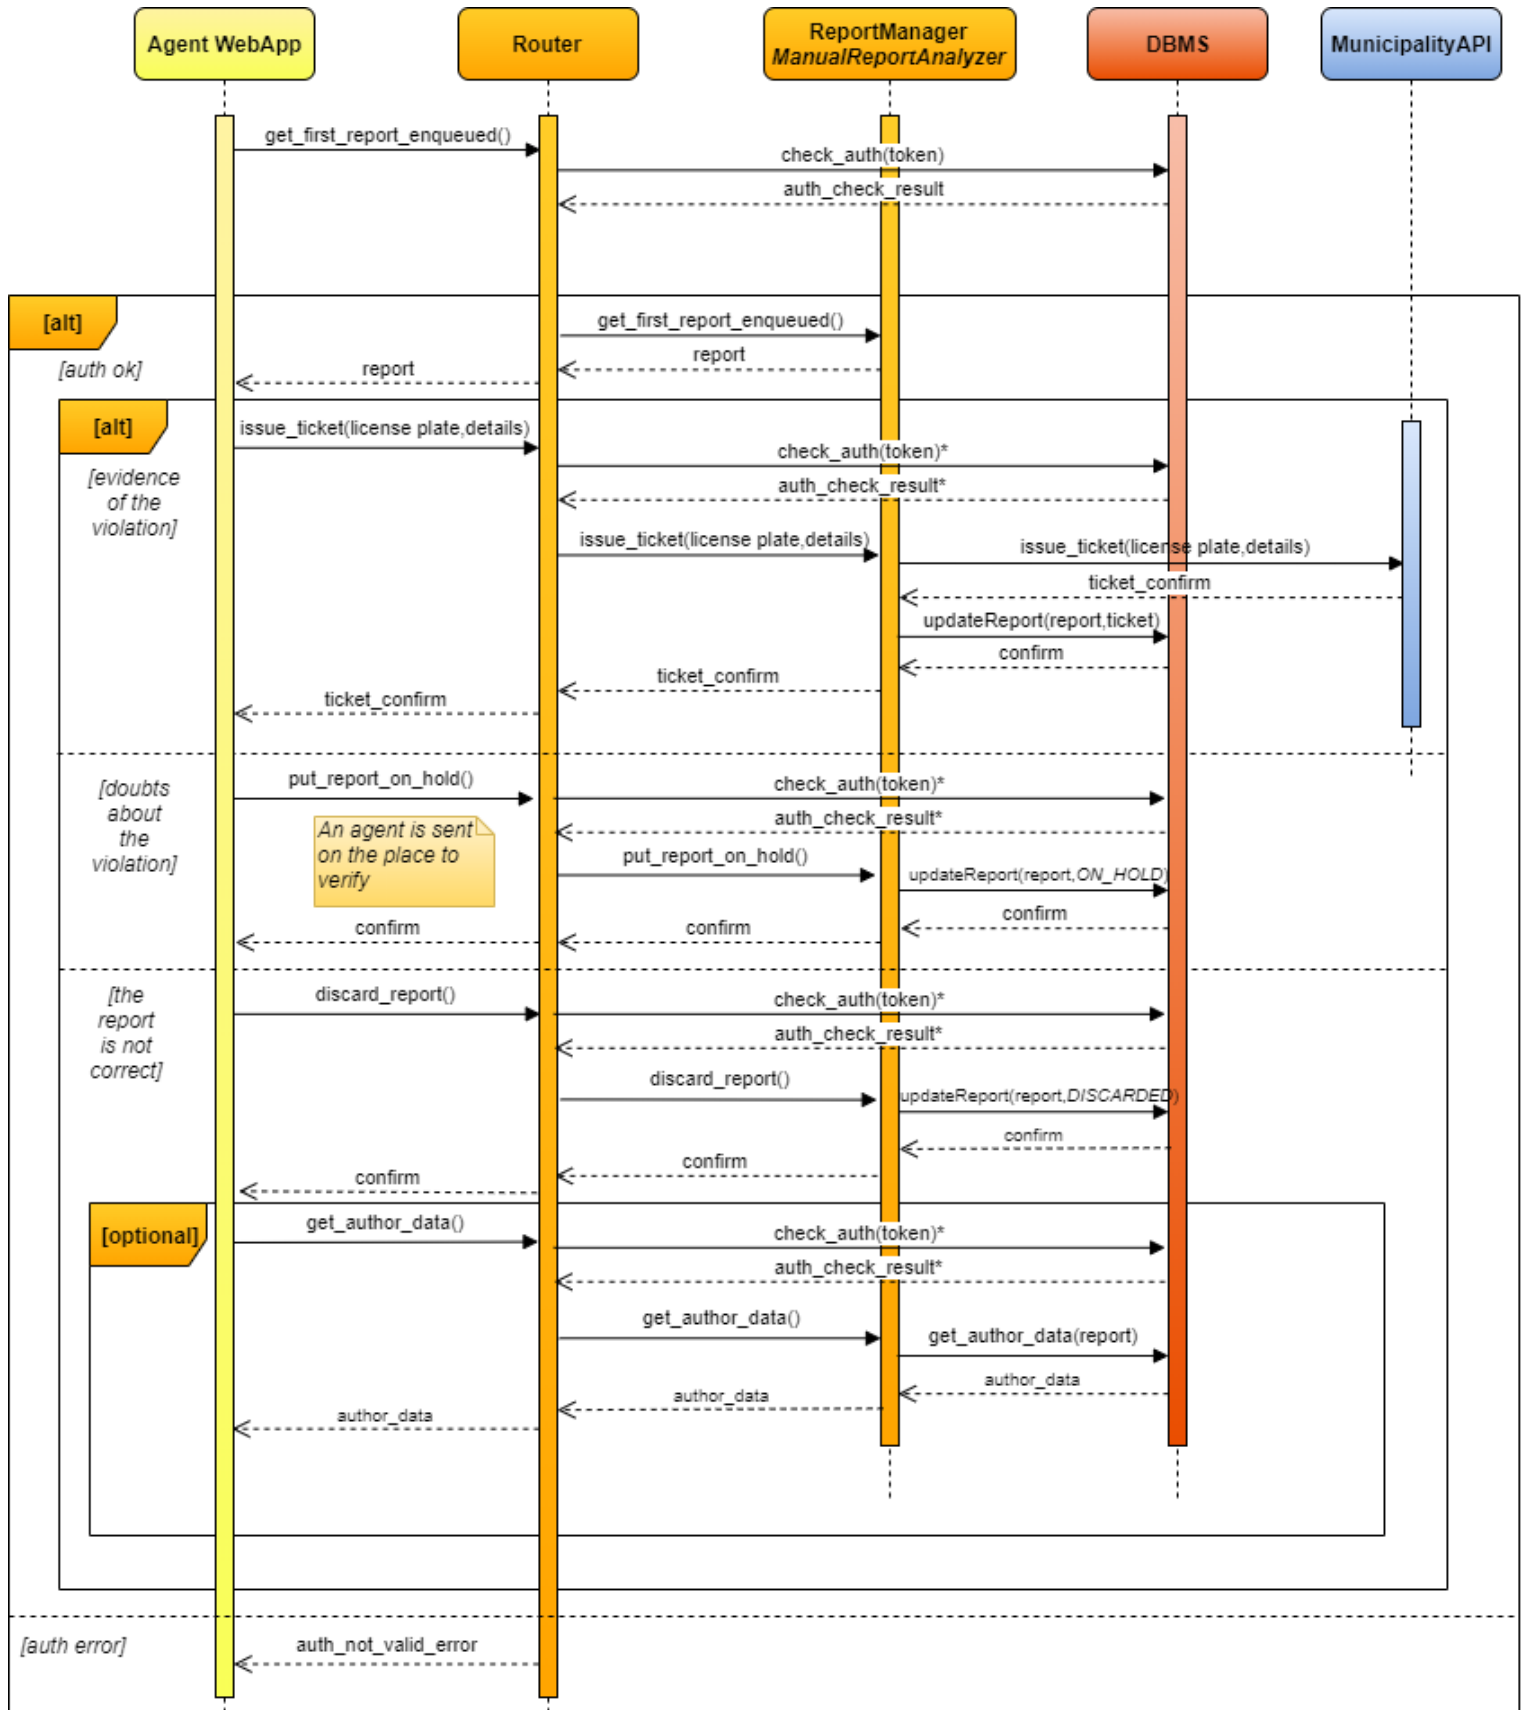
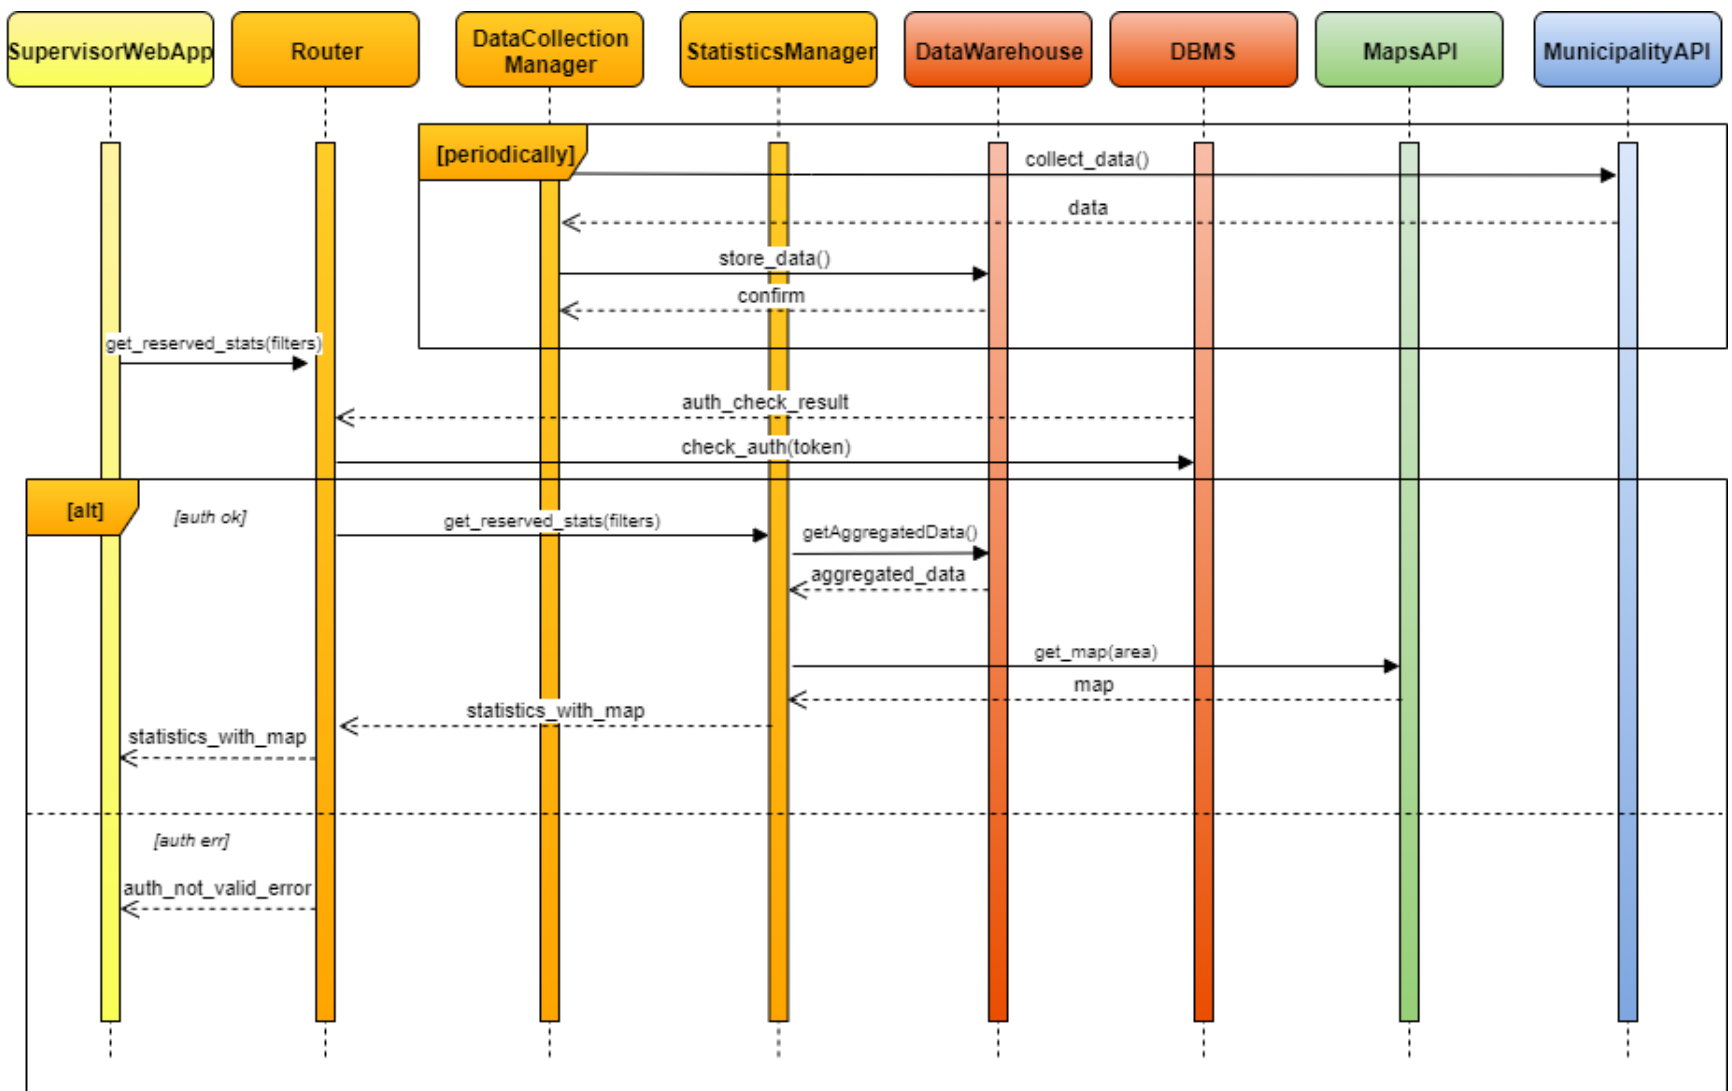


Figure 2.11: UML Architectural Sequence Diagram for *AgentCheckReport* use case

Figure 2.12: UML Architectural Sequence Diagram for the *CheckStatistics* use case

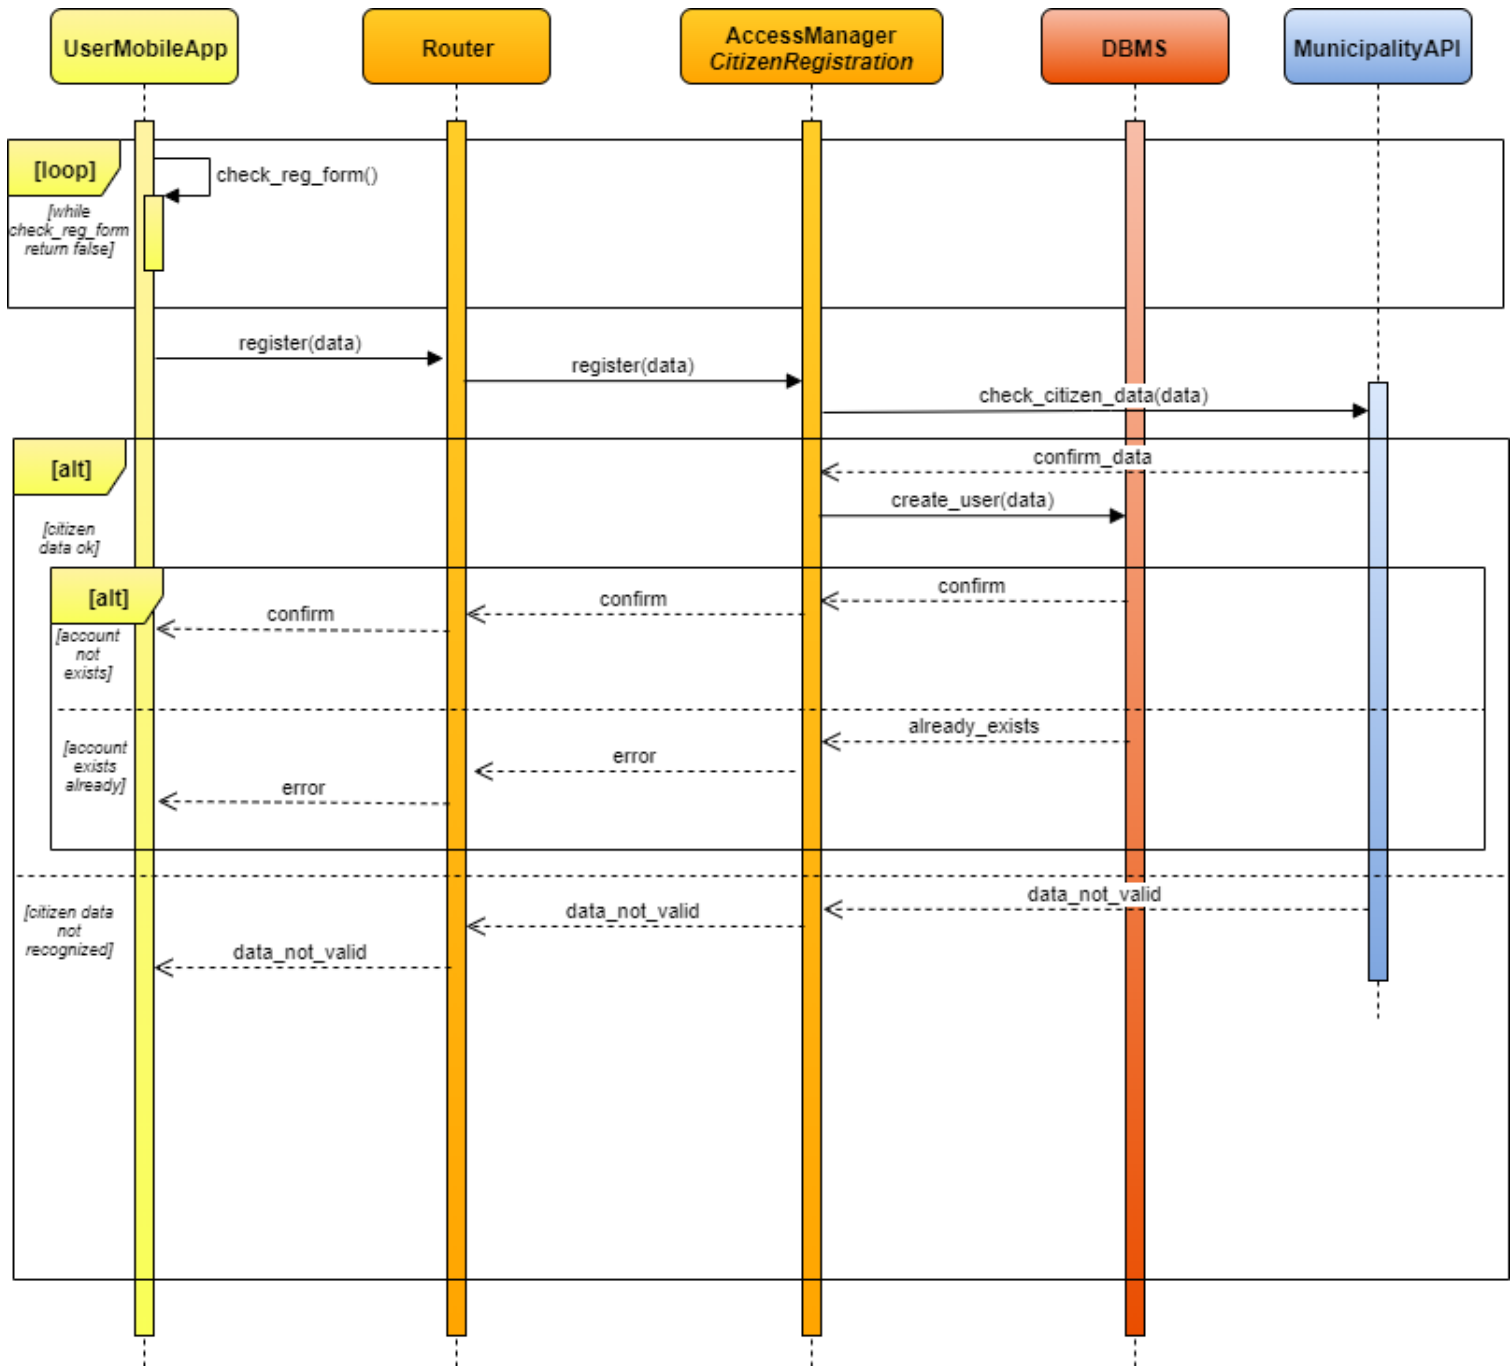
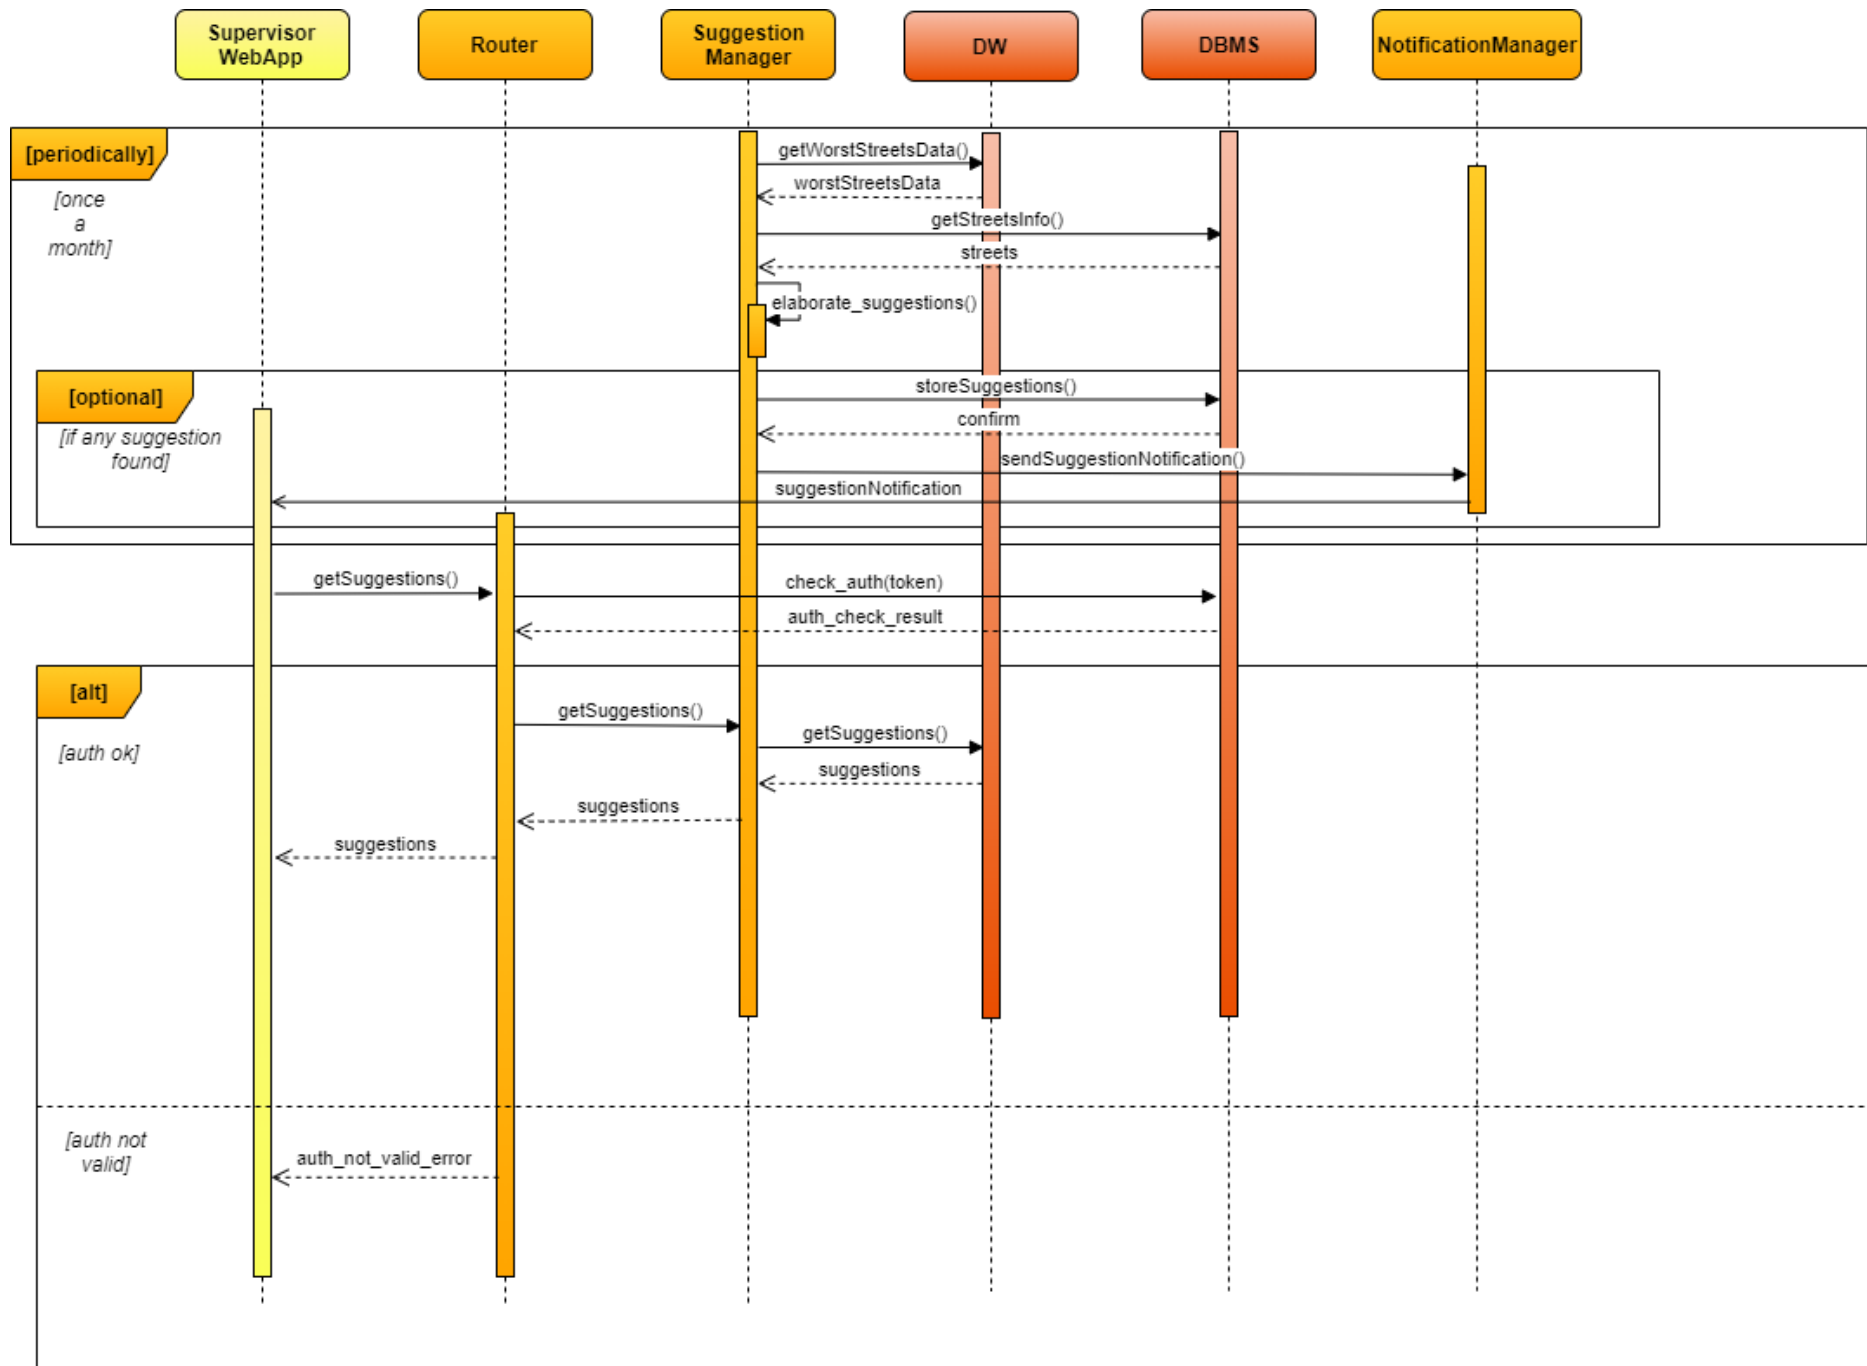


Figure 2.13: UML Architectural Sequence Diagram for *User Registration*

Figure 2.14: UML Architectural Sequence Diagram for the *Suggestions*

ticket the request is sent to the *MunicipalityAPI* and consequently the information is recorded by the *DBMS*.

If he decides to put the report on hold, this is simply recorded in the database. Otherwise if he discards the report this is recorded in the database and he also has the possibility to see the report author's data, always stored in the database.

The control for the user authentication is shown for every request, but only the first one presents the *Alternative* choice, for the others, marked with *, it has been assumed a positive answer, for the sake of readability, avoiding to repeat the *Alt* with the error message returned in case of authentication failure.

A similar assumption has been made for the municipality answer to the ticket emission request, it has been avoided to report the negative answer, for which the agent would be required to retry the request.

In the sequence diagram of figure 2.12 are described the interactions concerning the *Statistics*. Initially is shown how the *DataCollectionManager* component periodically collect data from the *MunicipalityAPI* and stores them.

Then is shown the request of *ReservedStatistics* by a *Supervisor WebApp*, with the *Router* which forwards the request to the *StatisticsManager* and this last component that builds the statistics consulting the *DataWarehouse* and the *MapsAPI* to retrieve a map of the interested area.

In the sequence diagram of figure 2.13 is shown the *Registration* process for a *User*. He compiles the form on the app, which already verifies that all fields have been properly filled, and the app sends the data to the *Router* which forwards the request to the *AccessManager* component (in particular the *CitizenRegistration* subcomponent). This component verifies the correctness of the provided data through the *MunicipalityAPI* and in case of a positive answer store the registration on the *Database*, otherwise it returns an error message.

In the sequence diagram of figure 2.14 are shown the interactions involved by the *Suggestions* function. For first is shown how the *SuggestionManager* periodically retrieve data from the *DataWarehouse* and from the *DBMS* and tries to elaborate new suggestions. If it succeeds in this it stores the new *Suggestion* and sends a notification to the *MunicipalitySupervisor WebApps* through the *NotificationManager*.

Then is shown how when a *Supervisor* wants to check the last suggestions, in any moment, he can access them by the corresponding page of his application.

2.5 Component interfaces

Simo?

2.6 Selected architectural styles and patterns

2.6.1 Model-View-Controller Pattern

The (distributed) Model-View-Controller pattern has been exploited to develop the entire application. This choice has been made to allow fast development, where multiple developers can work together at different levels, and easy debug and update of the application. In section 2.2 the component diagram shows all the high level components that are part of the application. Colors have been used to underline different tiers and so different functionalities: yellow components are View components, orange ones are Controller components and red components are Model Components. For more infos about MVC pattern, see [MVC-PATTERN].

2.6.2 Facade Pattern

The facade pattern has been exploited in our application: to hide the complexity of the application only one component can be seen by the client as a "facade". This component shows

an interface that masks all the complexity of the Application and Data Server to the User Interfaces. The "facade" component is the router. For more infos about facade pattern, see *[FACADE-PATTERN]*.

2.6.3 Thin client

Our application is based on a three-tier architecture where client is thin. Thin, in this case, means that client as all (or partial) and only functionalities of the Presentation layer. In particular in this application, client doesn't need to cache anything, and doesn't need to know anything about the application logic. No need to store locally statistics, considering that data (and so statistics) can change among two different requests. The client just needs to show the operation that a user can perform and the result of the requests. This is meaningful both for the WebApp and for the Mobile App.

2.6.4 RESTful architecture

In the system, the REST paradygm has been followed. This choice has been made mainly for the sake of scalability and independent development of different components. This goal has been achieved with uniformity of interfaces , client-server stateless interactions and cacheability of data (meaningful only for Server). For more infos about RESTful architecture, see *[RESTFUL-ARCHITECTURE]*.

Note: here interfaces refers to network interfaces in middleware layer, not to be confused with the component interfaces shown before.

2.7 Other design decisions

2.7.1 Consistency and update strategies among replicas

In this application, we need a client-centric consistency among replicas because end users (and therefore application servers that act as clients towards the DataServers) don't always connect to the same DataServer, due to the presence of the load balancer. Every DataServer can respond to a request to read or write data so we use an active replication protocol. In particular we exploit leaderless replication in which the decision on the value to read and the write to perform is decided by all the replicas or at least a quorum of them. The type of chosen consistency model is the "read your writes": the effect of a write operation by a process on a data item x will always be seen by a successive read operation on x by the same process. Concerning the update propagation we opted for propagating a notification of the operation, assuming that there will be more writes than reads. The propagation strategy chosen is the Gossiping strategy: when a replica is updated then it just propagates that update to all the nodes that it knows; if a replica receives an update that it has already received then the probability of propagating that information is decreased on that replica.

3 User interface design

4 Requirements Traceability

In this section is shown how the requirements are actually ensured and what components actually ensure them. It's worth to notice that for the sake of simplicity the Router has been ignored but it's always involved when dealing with a request coming from one of the clients. Table ref? has been added to highlight for each component what requirements it ensures.

Component	Requirements
User Mobile App	R1,R3, R4, R5, R6, R7, R8, R9, R10, R28, R29, R30, R33, R34,R35
MunicipalityAgent Web App	R19,R20,R21,R22,R23, R24, R26,R28,R29,R30,R33,R34,R35
MunicipalitySupervisor Web App	R28,R29,R30,R34,R35,R36,R37,R38, R40
AccessManager	R1, R2, R3, R25, R26, R38, R39 TODO
ReportManager	R11, R12, R13, R14, R15, R16, R18, R19 TODO
SuggestionManager	R42
StatisticsManager	R30, R32, R36
NotificationManager	R18, R43
DataCollectionManager	R31
DataWareHouse	R27, R31, R32, R36, R41, R42, R43

Table 4.1: Correspondence between goals and world and shared phenoma

In the following lines is explained how the requirements are provided by the components:

- [R1] The system must allow people to register to it providing personal data (name, surname, birthdate, identity card number, fiscal code) and selecting a username and a password: This requirement is provided by the *AccessManager* and the *User Mobile App* components. The *User Mobile App* allows the user to fill blank spaces with username and password and the *AccessManager* handles requests of registration from the client.
- [R2] The system must verify the correctness of the provided personal data of a registered user checking them from the identity card number, blocking the registration if they are not correct: the *AccessManager* checks the received data from the Client and checks them calling the *municipality API services* that actually possesses sensible data of the users.
- [R3] The system must allow registered users to login through their username and password,if they provide them correctly: this requirement is provided by the *AccessManager* and the *User Mobile App*. The Mobile app allows registered users to insert username and password while the *AccessManager* handles the requests of login from the user and blocks them if, checking from the DataBase, the data inserted is not correct.
- [R4] The system must allow logged user to fill a report violation form: this requirement is

fulfilled by the User Mobile App component that allows logged user to choose the "Report a violation" feature.

- [R5] The system must let the user select the type of violation detected: the requirement is fulfilled by the User Mobile App component, showing an empty space to fill with the type of violation detected in the report a violation process.
- [R6] The system must allow the user to insert the license plate in a violation report: the requirement is fulfilled by the User Mobile App component, showing an empty space to fill with the license plate of the car that committed the violation in the report a violation process.
- [R7] While reporting the violation, the system must allow users to take one or more pictures of the potential violation: the requirement is fulfilled by the User Mobile App component, allowing user to click on the "Take a picture" button.
- [R8] The system must not allow users to choose pictures not taken in the moment of the report: this requirement is guaranteed by the User Mobile App by not allowing client to just pick some random picture from his local storage.
- [R9] The system must collect the current position of the user, using GPS: the User Mobile App component ensures this requirement by taking the current position of the User using GPS location.
- [R10] The system must allow user to confirm or delete the current report: the User Mobile App component ensures this requirement by either sending the report for a check through the "confirm" button or deleting the current report clicking on the back button.
- [R11] After confirmation, the system must add the current date and time to the report: the ReportManager actually takes the requests from the client and attaches to them the current time and date taken from the application server internal clock.
- [R12] The system must store confirmed report: the ReportManager is responsible for this requirement, calling the DataServer to actually store the report.
- [R13] The system must check reports to try to find if the pictures of the violations have been modified: the ReportManager manages to check if the pictures are fake or not or have been modified.
- [R14] The system must try to find, according to the GPS position of the user and the pictures sent, if the position is fake or not: the ReportManager ensures this requirement by running an algorithm to define if the position is correct or not.
- [R15] The system must discard the report if it has been recognized as fake according to the previous requirements (R13-R14): the ReportManager is in charge of this, deleting the report if recognized as fake.
- [R16] The system must try to automatically recognize the license plate in the photo, possibly with the help of the value inserted by the user: the ReportManager is in charge of this , running an algorithm for text recognition in the picture(s).
- [R17] The involved municipality must be calculated considering in which city the reported violation has been found, based on the GPS position of the user that has sent the report: the reportManager provides this requirement by asking the Maps Service the municipality associated to the position of the user.

- [R18] The system must send the reported violations to the involved municipality: the ReportManager and the the NotificationManager are responsible for this. After having saved it, the ReportManager sends the report to the NotificationManager that forwards it to the involved municipality.
- [R19] The system must allow an agent to see the reports for its municipality, checking them in order of arrival: The MunicipalityAgent Web app component is responsible for this, showing on screen the reports in order of arrival.
- [R20] The system must allow an agent to issue a traffic ticket to a certain person (i.e. license plate) through the correspondent municipality service: the MunicipalityAgent Web App allows agents to issue traffic tickets through the specific button in the Web App, calling the MunicipalityAPI to issue the traffic ticket.
- [R21] The system must allow an agent to put on hold a violation report if it needs to be checked in person: The MunicipalityAgent Web App ensures this by shwoing the possibility of putting a report on hold while checking it.
- [R22] The system must allow an agent to discard a violation if it has been verified as fake or it cannot be verified (the vehicle is not there anymore) or it is a duplicated report: the MunicipalityAgent Web App ensures this requirement by allowing the Agents to discard a report if needed.
- [R23] The system must allow an agent to retrieve the data of the author of a violation report: the MunicipalityAgent Web App asks to the Municipality API data about the author of the report.
- [R24] The system must allow an agent to create an accoun,providing personal data(name, surname, birthdate, rank, badge number): this requirement is ensured by the MunicipalityAgent Web App that allows agents to insert their data to register to the application.
- [R25] The system must verify the correctness of the provided personal data of a registering agent checking them through the Municipality Services, blocking the registration if they are not correct: the AccessManager is responsible for this, asking the Municipality API to check the identity of the agent.
- [R26] The system must allow an agent to login, inserting its ID and password, blocking the registration if the data inserted is not correct: Municipality Web App and AccessManager are responsible for this. The MunicipalityAgent Web App allows agents to insert data, while AccessManager checks if they are correct.
- [R27] The system must mine information about streets or area from the reported violations: the DataWareHouse is responsible for this, performing datamining on reports stored in the DataBase of the application.
- [R28] The system must allow all type of users (even if not authenticated) to select the see information for a city. The user can choose either the city where he is, using the GPS position, or an arbitrary selected location. The User Mobile App component, the MunicipalityAgent Web App and the MunicipalitySupervisor Web App ensure this requirement by allowing users to choose the city they want.
- [R29] The system must allow all type of users (even if not aunthenticated) to select information about streets or areas in the city selected and to specify if he wants information for a specific

street or area or a classification of streets or areas. The User Mobile App component, the MunicipalityAgent Web App component, the MunicipalitySupervisor component are responsible for this requirement by allowing users to choose the area or street they want.

- [R30] The system must show the the data corresponding to the selection of [R29]: the User Mobile App, MunicipalityAgent Web App, MunicipalitySupervisor Web App and Statisticsmanager components are responsible for this requirement; the StatisticsManager contacts the MapAPI to provide an image for the city/area/street selected. This image is then shown by the User Mobile App component to the user.
- [R31] The system must take information about accidents and tickets from the municipality: this requirement is ensured by the DataCollectionManager that periodically queries the Municipality API to retrieve new informations and saves them on the DataWareHouse.
- [R32] The system must use information about accidents and tickets to build statistics, crossing them with reported violations: the StatisticsManager and the DataWareHouse component ensure this requirement; the DataWareHouse components build statistics exploiting dataMining techniques
- [R33] The system must not allow common users to see confidential data about other people: The User Mobile App component and MunicipalityAgent Web App is in charge for this requirement by showing only data that does not violate privacy. This requirement is also guaranteed by a subcomponent in the Router (i.e. AuthChecker) to check if a request made by a specific client is valid or not.
- [R34] The system must allow tall type of users (even if not authenticated) to choose a topic: areas or streets with most accidents, areas or streets with the highest number of traffic tickets issued, areas or streets where there have been the best improvements, information for a specific area or street. The User Mobile App component, the MunicipalityAgent Web App component, the MunicipalitySupervisor component provide this requirement by allowing users to choose the topic they're interested into.
- [R35] The system must show to the user the information about the topic selected according to [R34]: The User Mobile App component, the MunicipalityAgent Web App component, the MunicipalitySupervisor component ensure this requirement by showing as an image the topic requested to the user.
- [R36] The system must allow authenticated supervisors to retrieve information about the vehicles with the highest number of violations in a selected area or street: the MunicipalitySupervisor Web App allows supervisors to select the statistics they want; the StatisticsManager asks the the DataWareHouse the type of Data requested by the User.
- [R37] The system must allow supervisors to access only information about their own municipality: the MunicipalitySupervisor Web App is responsible for this, allowing supervisor to only check Statistics and suggestions about his city. This requirement is also guaranteed by a subcomponent in the Router (i.e. AuthChecker) to check if a request made by a specific client is valid or not.
- [R38] The system must allow a supervisor to create an account, providing personal data(name, surname, birthdate, rank, badge number): this requirement is ensured by the MunicipalitySupervisor Web App that allows supervisors to insert their data to register to the application

- [R39] The system must verify the correctness of the provided personal data of a registering supervisor, checking them thorough the municipality services, blocking the registration if they are not correct : the AccessManager is responsible for this requirement, it receives the request and ask the MunicipalityAPI to check if the inserted identity is correct.
- [R40] The system must allow a supervisor to login, inserting its ID and password,blocking the registration if the data inserted is not correct: the MunicipalitySupervisor Web App and the AccessManager are responsible for the requirement. The MunicipalitySupervisor WebApp allows supervisor to enter his Id and password, while the AccessManager checks in the databases if the data inserted is correct.
- [R41] The system must take information about accidents, tickets and street networks (bike lanes, sidewalks, parking areas,. . .) from the municipality, exploiting the municipality services: the DataCollectionManager is responsible for this requirement periodically asking data to the Municipallity API and saves it in the DataWareHouse.
- [R42] The system must elaborate information about accidents, tickets and streets, combined with reports information, and try to find possible solutions for problems: the DataWareHouse component is responsible for this requirement trying to aggregate data coming from the Databases concerning reports, issued traffic tickets and accidents.
- [R43] The system must notify the municipality about new possible interventions: the NotificationManager the DataWareHouse and SuggestionManager components are responsible for this requirement: the DataWareHouse component forwards the new intervention to the SuggestionManager that forwards it to NotificationManager that sends it to the involved municipality.

5 Implementation, integration and test plan

6 Effort spent

Nicola Rosetti		
<i>Date</i>	<i>Hour</i>	<i>Section</i>
17-10-2019	1.5 h*	Component and high-level architecture analysis

Table 6.1

Simone Sartoni		
<i>Date</i>	<i>Hour</i>	<i>Section</i>
18-11-2019	1 h*	Componentst and high-level architecture analysis
24-11-2019	4 h	System architecture diagram and deployment diagram
27-11-2019	1.5 h	Update deployment diagram, requirements traceability revision and Requirements Traceability Matrix creation
28-11-2019	3 h	Requirements Traceability Matrix update and Interface Diagram

Table 6.2

Vittorio Torri		
<i>Date</i>	<i>Hour</i>	<i>Section</i>
18-11-2019	1 h*	Componentst and high-level architecture analysis
21-11-2019	1 h	Components diagram
22-11-2019	0.5 h	Components diagrams
23-11-2019	1.5 h	Components diagrams and components view
24-11-2019	2 h	Sequence diagrams and components view
26-11-2019	1 h	Sequence diagrams
27-11-2019	1 h	Sequence diagrams
28-11-2019	1 h*	RASD Update
28-11-2019	1 h	Sequence Diagram

Table 6.3

* *Group work*

7 References

- *[FACADE-PATTERN]*https://en.wikipedia.org/wiki/Facade_pattern - definition of facade pattern
- *[MVC-PATTERN]*<https://en.wikipedia.org/wiki/Model%E2%80%93view%E2%80%93controller> - definition of MVC pattern
- *[RESTFUL-ARCHITECTURE]*<https://restfulapi.net/rest-architectural-constraints/> - definition and characteristics of RESTful architecture