73-75

TRIPLE COMPARATOR


BOM

Qty	Value	
3	100p	
3	470n	
3	47u	
12	1N4148	
1	LM3900N	
3	220	
6	22k	
3	220k	
3	150k	
9	1M5	
3	25k	TRIMMER
3	25k	LINEAR POTENTIOMETER

7 3 - 7 5

TRIM INSTRUCTIONS

ONE TRIMMER FOR ALL THREE COM-
PARATORS. INPUT A SAWTOOTH 0-5V,
ADJUST FOR 50% PULSWIDTH WITH POT
AT NOON.

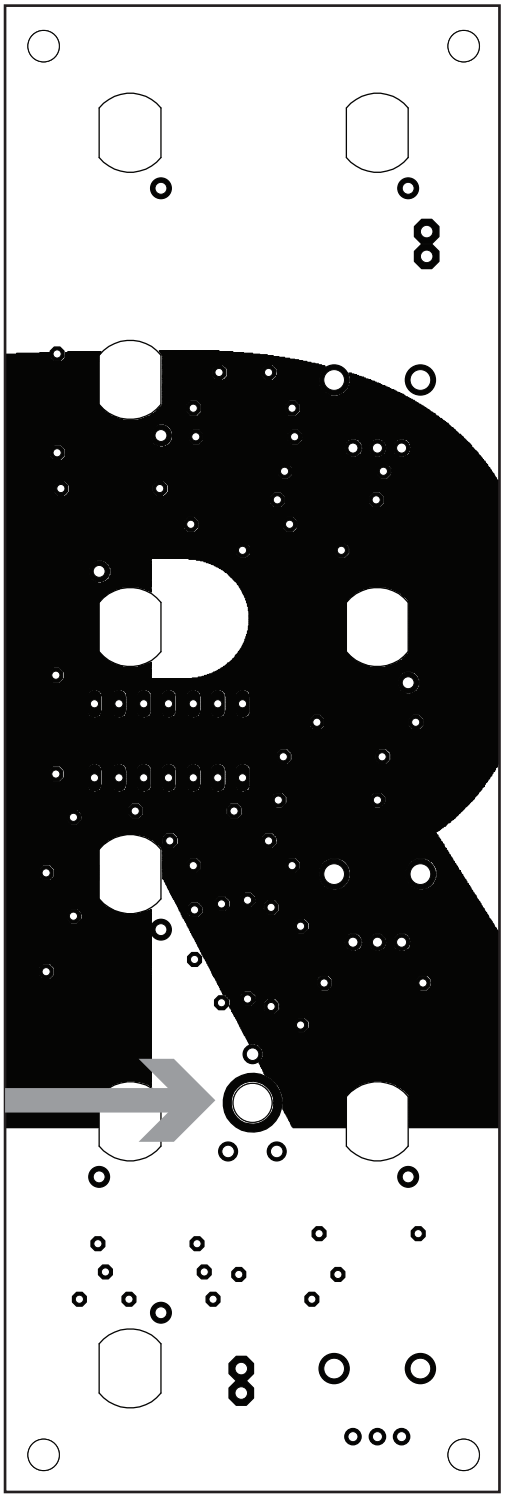

BACKSIDE OF CIRCUIT BOARD

73-75

TRIPLE COMPARATOR SCHEMATICS

