73-75

NEGATIVE SLEW

BOM


Qty	Value	
2	10n	
2	120p	
2	330n	
2	CA3086	
2	LM3900	
2	33	
4	220	
4	4k7	
4	6k8	
6	10k	
4	18k	
4	22k	
2	100k	
6	220k	
2	330k	
8	470k	
2	820k	
2	1M	
2	25k	TRIMMER
4	25k	LINEAR POTENTIOMETER

7 3 - 7 5

TRIM INSTRUCTIONS

PATCH PULSE OUTPUT TO INPUT FOR CYCLE ACTION. ADJUST TRIMMER TO TASTE.

ORIGNAL TRIMMING IS MAX FREQUECNY OF 1KHz FOR TOP SLEW AND 500Hz FOR BOTTOM SLOW. IT MIGHT BE PREFERABLE TO SET THEM TO THE SAME FREQUENCY THOUGH...

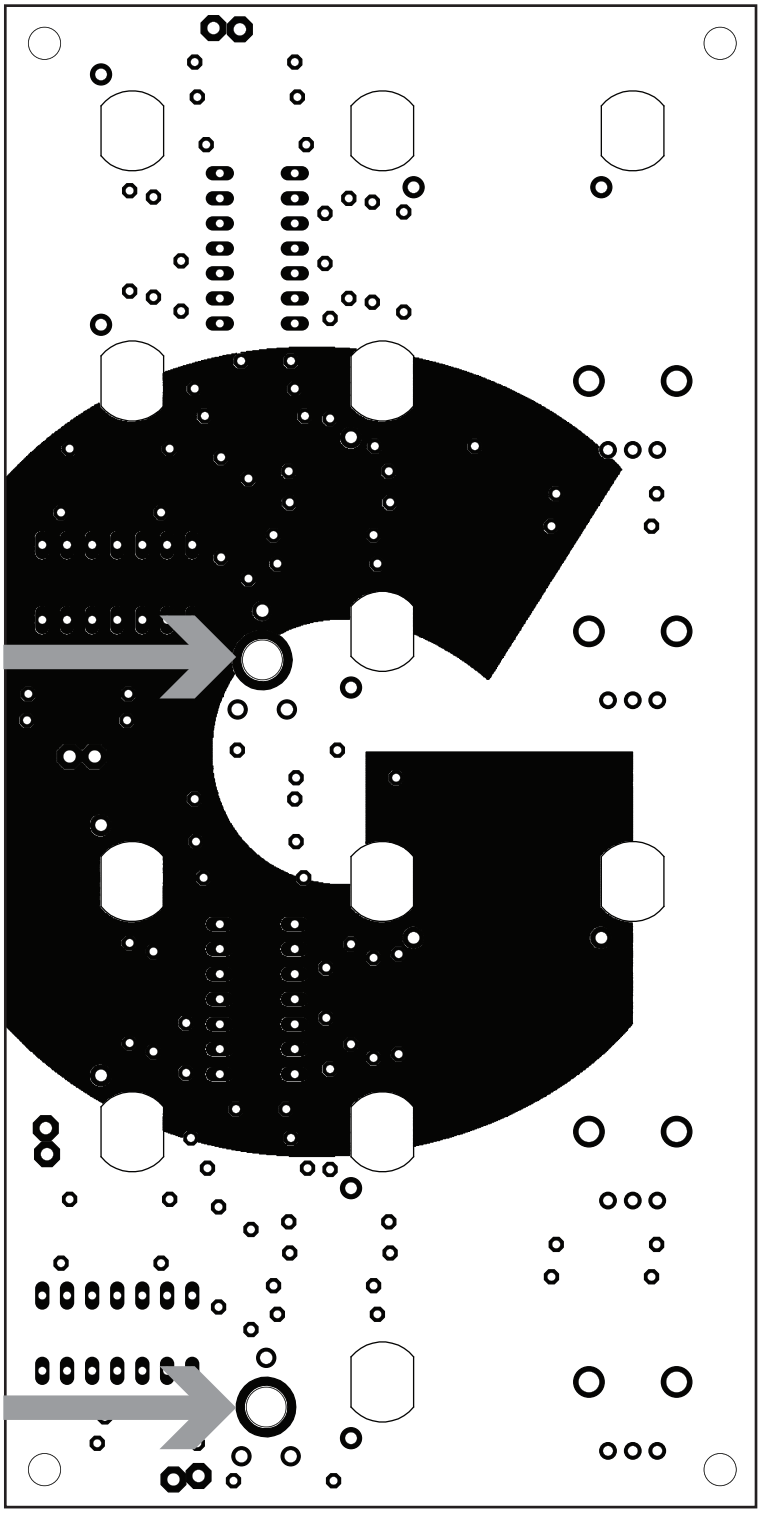

BACKSIDE OF CIRCUIT BOARD

73-75

NEGATIVE SLEW SCHEMATICS

