73-75

POSITIVE SLEW

BOM

Qty	Value	
3	100p	
3	470n	
3	47u	
12	1N4148	
1	LM3900N	
3	220	
6	22k	
3	220k	
3	150k	
9	1M5	
3	25k	TRIMMER
3	25k	POTENTIOMETER


7 3 - 7 5

TRIM INSTRUCTIONS

PATCH BOTTOM PULSE OUTPUT TO INPUT FOR CYCLE ACTION.

ADJUST TRIMMER TO TASTE.

ORIGNAL TRIMMING IS MAX FREQUECNY OF 1KHz FOR TOP SLEW AND 500Hz FOR BOTTOM SLOW. IT MIGHT BE PREFERABLE TO SET THEM TO THE SAME FREQUENCY THOUGH...

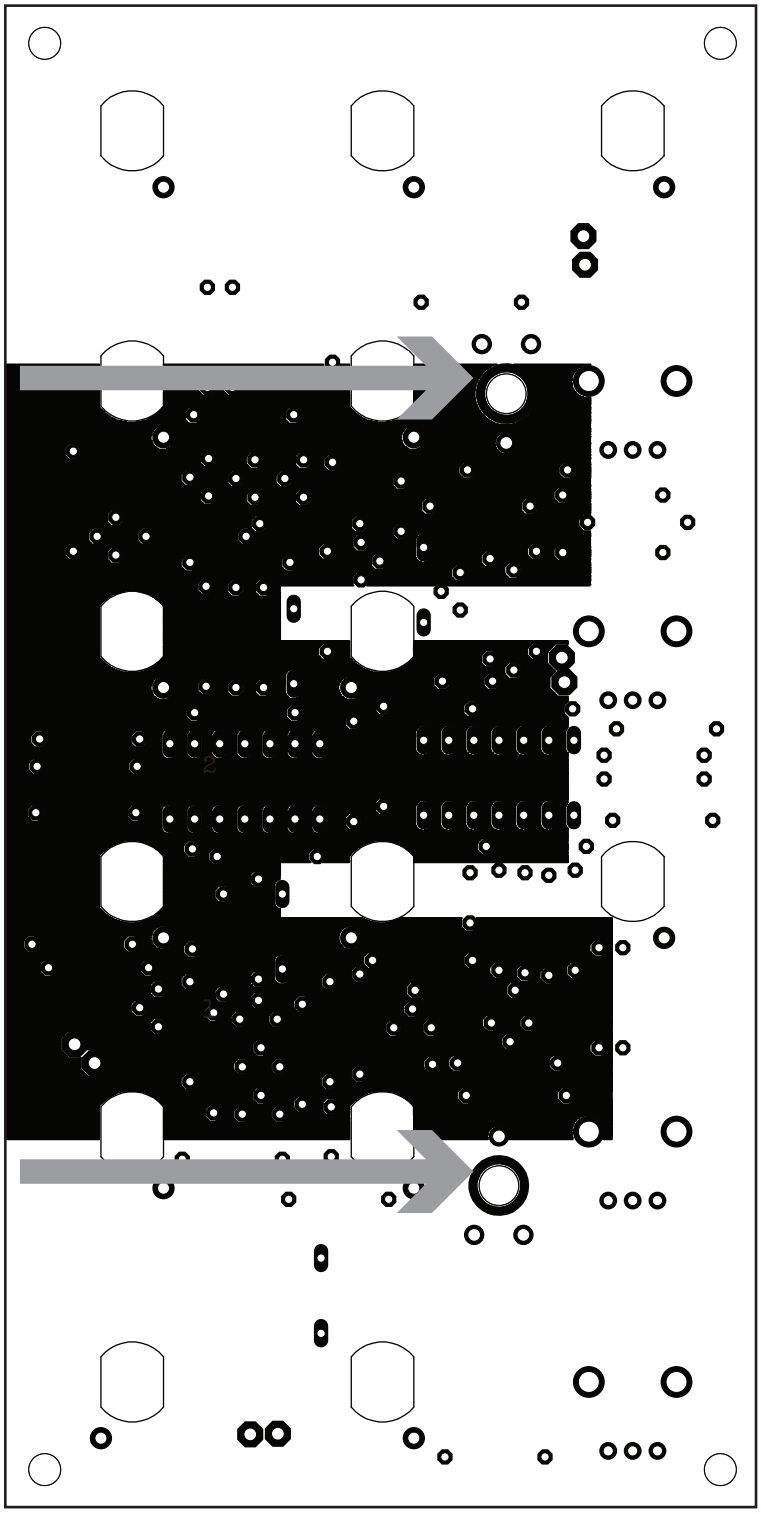

BACKSIDE OF CIRCUIT BOARD

73-75

POSITIVE SLEW SCHEMATICS

