

TTT4120 Digital Signal Processing Fall 2020

Finite-precision effects

Prof. Stefan Werner stefan.werner@ntnu.no Office B329

> Department of Electronic System © Stefan Werner

1

Lecture in course book*

- Proakis, Manolakis Digital Signal Processing, 4th Ed.
 - 9.4 Representation of Numbers
 - 9.6 Round-Off Effects in Digital Filters

A compressed overview of topics treated in the lecture, see "Filter implementation" on Blackboard

*Level of detail is defined by lectures and problem sets

2


Contents and learning outcomes

- Representations of numbers
- · Limit cycles and scaling
- Statistical characterization

3

3

Introduction



- Until now, coefficients and operations of filter designs and implementations expressed using infinite-precision numbers
- In practice, finite-word-length is required in any digitalization
- Especially low-power and small-area components in wireless communications

4

Number representation...

- Consider the representation of numbers for digital computations
- Limited (usually fixed) number of digits to represent a number
- Fixed decimal point representation
 - Fixed amount of digits and fixed decimal point placement

- Floating (decimal) point representation
 - Decimal number represented by a mantissa and an exponent

$$2.0 \cdot 10^2, 4.9 \cdot 10^8, \dots$$

5

5

Number representation

- Finite precision errors not a problem in floating-point arithmetic
- Finite word length causes problems in fixed-point arithmetic
- Fixed-point implementation used only when
 - speed,
 - power
 - size,
 - and cost

are important.

6

Finite-precision effects

- Overflow
- Quantization of filter coefficients
- Signal quantization
 - A/D conversion
 - Round-off noise
 - (Limit cycles)

7

Fixed-point representation

- Generalization of the familiar decimal representation of a number
 - String of digits with a decimal point

$$X = (b_{-A}, \dots, b_{-1}, b_0, b_1, \dots, b_B)_r$$
$$= \sum_{i=-A}^{B} b_i r^{-i}, 0 \le b_i \le (r-1)$$

where b_i represents the digit and r is the base (radix)

• Focus on binary representation: Generalization of the familiar decimal representation of a number $b_i \in \{0,1\}$, and r = 2

$$(101.01)_2 = 1 \times 2^2 + 0 \times 2^1 + 0 \times 2^0 + 0 \times 2^{-1} + 1 \times 2^{-2}$$

= 5.25

• Most significant bit (MSB) b_{-A} , least significant bit (LSB) b_{B}

8

Fixed-point representation...

• Fraction format, $|X| < 1 \Rightarrow (A = 0, B = N - 1)$, and

$$X = (b_0, b_1, ..., b_{N-1})_2$$

can represent unsigned integers from 0 to $1 - 2^{-N}$

• Format for positive fractions: X = 0. $b_1 b_2 \dots b_B = \sum_{i=1}^{B} b_i 2^{-i}$

$$0.011 = \frac{1}{4} + \frac{1}{8} = \frac{3}{8}$$

- MSB b_0 set to zero to represent the positive sign
- Negative fraction: $X = -0. b_1 b_2 ... b_B = -\sum_{i=1}^{B} b_i 2^{-i}$
 - Three different ways to represent negative fractions

(

9

Fixed-point representation...

- Signed-magnitude (SM) format
 - MSB is set to 1 to represent negative sign

$$X_{SM} = 1. b_1 b_2 \dots b_B = -\sum_{i=1}^{B} b_i 2^{-i}, X \le 0$$

$$1.011 = -\frac{3}{8}$$

- Symmetry: as many positive as negative values
- Disadvantages
 - Two ways of expressing 'zero': 'plus zero' and 'minus zero'
 - Addition and subtractions are more complicated

Fixed-point representation...

- One's-complement format
 - Negative numbers represented as

$$\begin{split} X_{1C} &= 1.\,\bar{b}_1\bar{b}_2\,...\,\bar{b}_B = 1\times 2^0 + \sum_{i=1}^B (1-b_i)2^{-i}\,X \leq 1 \\ X_{1C} &= 1.100 = -\frac{3}{8} \end{split}$$

11


11

Fixed-point representation...

- Two's-complement format
 - Most used
 - Negative numbers represented as

$$\begin{split} X_{2C} &= 1.\, \bar{b}_1 \bar{b}_2 \dots \bar{b}_B + 0\,\, 0 \cdots 01 \\ &= X_{1C} + 2^{-B} \\ \frac{3}{8} &= 0.011 \ \Rightarrow X_{2C} = X_{1C} + 0.001 = 1.101 \end{split}$$

• Range for (B + 1)-bit numbers is from -1 to $1 - 2^{-B}$



12

Fixed-point representation...

- · Summary advantages of two's-complement format
 - Provides for all 2^{B+1} distinct representations for a B-bit fractional representation. Only one representation for zero.
 - Complement of a complement is the number itself

$$\bar{X} = X_{2C} \Rightarrow \bar{X}_{2C} = X$$

- Unifies subtraction and addition operations (subtractions are essentially additions)
- In a sum of more than two numbers, the internal overflow do not affect the final result as long as the result is within the range

13

13

Floating-point representation

• Floating-point represented by a mantissa and an exponent

$$X = M \cdot 2^E$$

- Mantissa and exponent require a sign-bit for representing positive and negative numbers
- Floating-point form can cover a larger dynamic range than finiteprecision for same number of bits by varying the resolution across the range
 - For the same range floating point, provides finer resolution for small numbers but coarser resolution for the larger numbers
 - Fixed-point provides a uniform resolution throughout the range

$$X_1 = 5 = 0.101 \cdot 2^{0.11} = 0.101 \cdot 2^3 = (101)_2 = 5$$

 $X_2 = \frac{3}{8} = 0.110 \cdot 2^{1.01} = 0.110 \cdot 2^{-1} = (0.011)_2 = \frac{3}{8}$

Fixed-point implementation

- The way additions and multiplications are carried out using fixedpoint numbers depends on the format used for negative fraction
 - Two's-complement addition

$$\frac{4}{8} - \frac{3}{8} = \frac{4}{8} + \left(-\frac{3}{8}\right) = (0.100)_2 + (1.101)_2 = (0.001)_2 = \frac{1}{8}$$

Carry-bit does not propagate beyond MSB

$$\frac{6}{8} + \frac{3}{8} = (0.110)_2 + (0.011)_2 = (1.001)_2 = -\frac{7}{8}$$

15

15

Fixed-point implementation...

- The limited dynamic range can lead to large errors
 - In previous example the error equals the total dynamic range




Figure 9.6.4 Characteristic functional relationship for two's-complement addition of two or more numbers.

Problem prevented by scaling or saturation

Fixed-point implementation...

- The way additions and multiplications are carried out using fixedpoint numbers depends on the format used for negative fraction
 - Two's-complement multiplication

$$\frac{3}{8} \cdot \frac{3}{8} = (0.011)_2 \cdot (0.011)_2 = (0.001001)_2 = \frac{9}{64}$$

- Will be rounded to $(0.001)_2 = \frac{1}{8}$
- Rounding error $E_r = \frac{9}{64} \frac{8}{64} = \frac{1}{64}$

17


17

Fixed-point implementations...


• Quantization of real-valued signal x into N = B + 1 bits


$$\hat{x} = Q(x) = x + \epsilon$$

• Error ϵ limited in range



Errors uniformly distributed






 $\hat{x} = Q(x)$

Fixed-point implementations...

• Linear model for analyzing quantization effects



• PDF of quantization error:

$$p_E(\epsilon) = \begin{cases} \frac{1}{\Delta}, & |\epsilon| \leq \frac{\Delta}{2} \\ 0, & \text{else} \end{cases}$$

1

19

Statistical characterization of errors...

• Error power (variance):

$$\sigma_{\epsilon}^{2} = \int_{-\infty}^{\infty} \epsilon^{2} p_{E}(\epsilon) d\epsilon = \int_{-\frac{\Delta}{2}}^{\frac{\Delta}{2}} \epsilon^{2} \frac{1}{\Delta} d\epsilon$$

$$= \frac{\epsilon^{3}}{3\Delta} \Big|_{\epsilon = -\frac{\Delta}{2}}^{\frac{\Delta}{2}} = \frac{1}{3\Delta} \Big[\Big(\frac{\Delta}{2}\Big)^{3} - \Big(-\frac{\Delta}{2}\Big)^{3} \Big]$$

$$= \frac{\Delta^{2}}{12} = \frac{2^{-2B}}{12}$$

Fixed-point implementation...

- Fixed-point implementations lead to four possible nonlinearities
 - 1. Rounding due to limited resolution (number of bits)
 - 2. Overflow due to limited dynamic range
 - 3. Inaccuracy in filter specs due to use of quantized filter coefficients
 - 4. Limit cycles (oscillations) due to quantized filter coefficients and rounding
- We will look at Items 1 and 2

21

21

Effects in digital filters: scaling

- Scaling to prevent overflow
 - Signal scaling before addition ensure that the sum is less than unity, i.e., $|x_1[n] + x_2[n]| < 1$
 - Suppose that we pass sequence x[n] through filter h[n]

$$\begin{aligned} |y[n]| &= |\sum_{m=-\infty}^{\infty} h[m] x[n-m]| \\ &\leq \sum_{m=-\infty}^{\infty} |h[m]| |x[n-m]| \end{aligned}$$

• Suppose that x[n] is upper bounded by unity, $|x[n]| < A_x$,

$$|y[n]| \le A_x \sum_{m=-\infty}^{\infty} |h[m]|$$
, $\forall n$

• If dynamic range is limited to [-1,1), how to scale x[n] such that |y[n]| < 1?

Effects in digital filters: scaling

• Overflow is prevented if x[n] scaled such that

$$A_{\chi} < \frac{1}{\sum_{m=-\infty}^{\infty} |h[m]|}$$


- Scaling reduces the signal resolution and signal power
- Reduced signal-to-noise ratio (SNR)

23

23

Effects in digital filters: quantization


- Analysis of quantization effects in digital filters is hard
- Model the quantization error as an additive noise sequence e[n]
- Example: Single pole filter



24

Effects in digital filters: quantization...

- Output can be separated into two components
 - One is due to the input sequence x[n]
 - Second is due to white sequence e[n]



• We can now calculate the ouput power due to quantization error

25


25

Effects in digital filters: quantization...

• Variance of the quantization error σ_q^2 :

$$\begin{split} \sigma_q^2 &= E\{q^2[n]\} = \gamma_{qq}[0] = \frac{\sigma_e^2}{2\pi} \int_{-\infty}^{\infty} |H(\omega)|^2 d\omega \\ &= \sigma_e^2 \sum_{k=-\infty}^{\infty} h^2[k] = \frac{\sigma_e^2}{1-a^2} \end{split}$$

Effects in digital filters: quantization...




- Observations from single-pole filter
 - Noise power at the output is increased relative to the input noise

27

27

Effects in digital filters: quantization

• Example: Two-pole filter

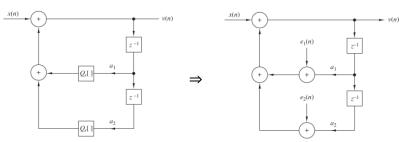

- Same idea as in single-pole filter
 - Output noise power obtained by exciting system with

$$e[n] = e_1[n] + e_2[n]$$

28

Fixed-point implementations...

- Quantization of filter coefficients
 - Leads to non-ideal frequency response
 - Direct-form structures are sensitive to coefficient rounding for filter orders N > 2
 - Use of parallel- and/or cascade structures

31

31

Effects in digital filters: quantization...

- Second-order IIR section
- Quantization of filter coefficients $2r\cos\theta$ and r^2 with 4 bits




Figure 9.5.2 Realization of a two-pole IIR filter.





Figure 9.5.3 Possible pole positions for two-pole IIR filter realization in Fig. 9.5.2.

32

Effects in digital filters: quantization...

- Alternative structure for second-order IIR section (more mult)
- Quantization of filter coefficients $r \cos \theta$ and $r \sin \theta$ with 4 bits






Figure 9.5.4 Coupled-form realization of a two-pole IIR filter.

Figure 9.5.5 Possible pole positions for the coupled-form two-pole filter in Fig. 9.5.4.

33

Summary of filter structures

- All filter structures give identical output in infinite precision
- Advantages and disadvantages show up in finite precision
 - Other factors include computational complexity, and storage requirements

Summary

- Today we discussed:
 - Number representations
 - Rounding errors and limit cycles
- Next:
 - Multirate processing

35