



Introduction to IP Routing



Table of Contents



- ▶ Routing Basics
- ▶ IP Routing Process
- ▶ Static and Dynamic Routing



1


Routing Basics

CLARUSWAY©
WAY TO REINVENT YOURSELF



Routing Basics

- IP routing is the process of sending packets from a host on one network to another host on a different remote network
- This process is usually done by routers
- Routers use routing tables
- Routers don't really care about hosts—they care only about networks and the best path to each network

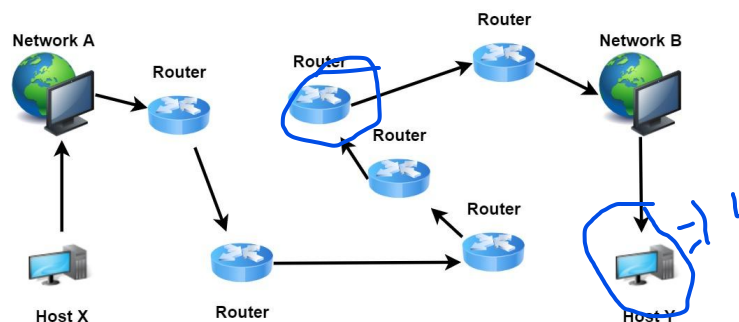

CLARUSWAY©
WAY TO REINVENT YOURSELF



Routing Basics

To be capable of routing packets, a router must know at least the following information:

- Destination network address
- Neighbor routers from which it can learn about remote networks
- Possible routes to all remote networks
- The best route to each remote network
- How to maintain and verify routing information



Routing Basics

- Each router maintains a routing table
- Routing table is used to determine the path to the destination network
- Each routing table consists of:
 - Network destination and subnet mask
 - Remote router – IP address of the router
 - Outgoing interface

```
[Comware] display ip routing-table
Routing Tables: Public
Destinations : 7 Routes : 7
```

Destination/Mask	Proto	Pre	Cost	NextHop	Interface
10.2.0.0/18	OSPF	10	110	10.1.1.5	Vlan3
10.2.64.0/18	OSPF	10	130	10.1.1.13	Vlan5
10.2.128.0/17	OSPF	10	30	10.1.1.5	Vlan3
10.2.192.0/17	OSPF	10	40	10.1.1.13	Vlan5

<-output omitted->




2

IP Routing Process



IP Routing Process

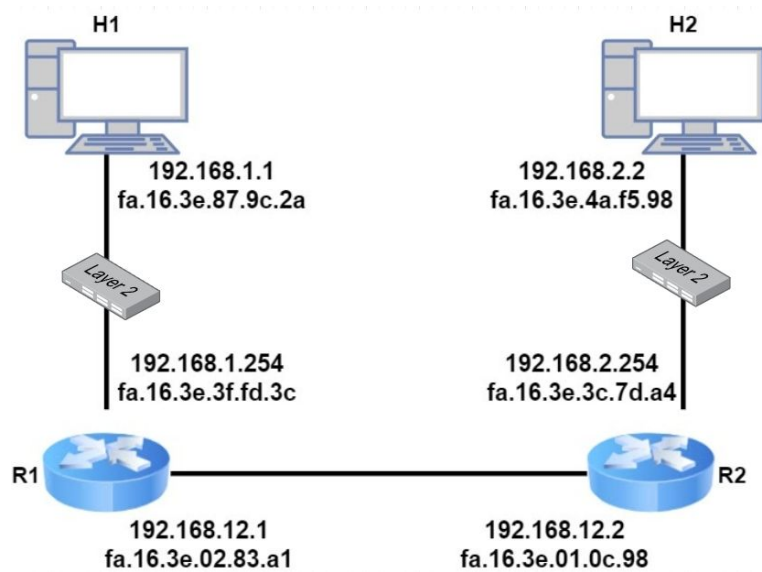

IP Routing Process

H1

IP Packet

Source: 192.168.1.1
Destination: 192.168.2.2
Data

Is the destination local or remote?


Looks own IP Address and Subnet Mask

Network ID is 192.168.1
Destination is remote

```
C:\Users\H1>ipconfig
Windows IP Configuration
Ethernet adapter Ethernet 1:
    Connection-specific DNS Suffix . : nwl.local
    Link-local IPv6 Address . . . . . : fe80::88fd:962a:44d6:3alf%4
    IPv4 Address. . . . . : 192.168.1.1
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.254
```

CLARUSWAY©
WAY TO REINVENT YOURSELF

9



IP Routing Process

H1

The destination host is on another network, so I have to build an ethernet frame but do I know the destination MAC address of the default gateway?

Checks ARP Table
address resolution protocol


```
C:\Users\H1>arp -a
Interface: 192.168.1.1 --- 0x4
Internet Address      Physical Address      Type
192.168.1.254         fa-16-3e-3f-fd-3c     dynamic
192.168.1.255         ff-ff-ff-ff-ff-ff     static
224.0.0.22            01-00-5e-00-00-16     static
224.0.0.251           01-00-5e-00-00-fb     static
224.0.0.252           01-00-5e-00-00-fc     static
239.255.255.250       01-00-5e-7f-ff-fa     static
```

Ethernet Frame

Source: FA16.3E87.9C2A
Destination: FA16.3E3F.FD3C
Source: 192.168.1.1
Destination: 192.168.2.2
Data

CLARUSWAY©
WAY TO REINVENT YOURSELF

10



IP Routing Process

fcs is layer 2 checking frame

R1


I just received a frame. First, let's check if Frame Check Sequence (FCS) is correct or not.

FCS is wrong!

FCS is correct!

Process the frame


**Drop the frame
(No error recovery)**



Check destination MAC Address

**The frame is addressed to me.
I need to de-encapsulate the IP packet.**

Version	Header Length	Type of Service	Total Length	
Identification			IP Flags	Fragment Offset
Time to Live 255	Protocol	Header Checksum		
Source: 192.168.1.1				
Destination: 192.168.2.2				
IP Option				



CLARUSWAY©
WAY TO REINVENT YOURSELF

IP Routing Process

header checksum is layer3 checking packet

R1

Version	Header Length	Type of Service	Total Length	
Identification			IP Flags	Fragment Offset
Time to Live 255		Protocol	Header Checksum	
Source: 192.168.1.1				
Destination: 192.168.2.2				
IP Option				


Checksum is wrong!

**Drop the IP packet
(No error recovery)**

Checksum is correct!

Look at destination address

Version	Header Length	Type of Service	Total Length	
Identification			IP Flags	Fragment Offset
Time to Live 255	Protocol		Header Checksum	
Source: 192.168.1.1				
Destination: 192.168.2.2				
IP Option				



CLARUS
WAY TO REINVENT YOURSELF

IP Routing Process


R1

Version	Header Length	Type of Service	Total Length	
Identification			IP Flags	Fragment Offset
Time to Live 255		Protocol	Header Checksum	
Source: 192.168.1.1				
Destination: 192.168.2.2				
IP Option				

Check routing table if destination address matches any

```
R1#show ip route
Gateway of last resort is not set

192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.1.0/24 is directly connected, GigabitEthernet0/1
L    192.168.1.254/32 is directly connected, GigabitEthernet0/1
S    192.168.2.0/24 [1/0] via 192.168.12.2
192.168.12.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.12.0/24 is directly connected, GigabitEthernet0/2
L    192.168.12.1/32 is directly connected, GigabitEthernet0/2
```



CLARUSWAY©
WAY TO REINVENT YOURSELF

IP Routing Process


R1

Version	Header Length	Type of Service	Total Length	
Identification			IP Flags	Fragment Offset
Time to Live 254		Protocol	Header Checksum	
Source: 192.168.1.1				
Destination: 192.168.2.2				
IP Option				

Decrease TTL by 1

Check ARP table if destination address (192.168.12.2) matches any

```
R1#show ip arp
Protocol Address      Age (min)  Hardware Addr  Type   Interface
Internet 192.168.1.1      58        fa16.3e87.9c2a ARPA   GigabitEthernet0/1
Internet 192.168.1.254    -         fa16.3e3f.fd3c ARPA   GigabitEthernet0/1
Internet 192.168.12.1     -         fa16.3e02.83a1 ARPA   GigabitEthernet0/2
Internet 192.168.12.2     95        fa16.3e01.0c98 ARPA   GigabitEthernet0/2
```




CLARUSWAY©
WAY TO REINVENT YOURSELF

IP Routing Process

R1

- Build a new frame and send to R2

Source: FA16.3E02.83A1	Destination: FA16.3E01.0C98	Source: 192.168.1.1	Destination: 192.168.2.2	Data
---------------------------	--------------------------------	------------------------	-----------------------------	------



R2


- Check the FCS of the Ethernet frame
- De-encapsulate the IP packet, discard the frame
- Check the IP header checksum
- Check the destination IP address

IP Routing Process

R2 Check its routing table for destination IP address

Source: FA16.3E87.9C2A	Destination: FA16.3E01.0C98	Source: 192.168.1.1	Destination: 192.168.2.2	Data
---------------------------	--------------------------------	------------------------	-----------------------------	------

```
R2#show ip route
S    192.168.1.0/24 [1/0] via 192.168.12.1
    192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.2.0/24 is directly connected, GigabitEthernet0/1
L    192.168.2.254/32 is directly connected, GigabitEthernet0/1
    192.168.12.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.12.0/24 is directly connected, GigabitEthernet0/2
L    192.168.12.2/32 is directly connected, GigabitEthernet0/2
```





Decrease TTL to 253 and check the ARP table if destination address (192.168.2.2) matches any

```
R2#show ip arp
Protocol Address      Age (min)  Hardware Addr  Type   Interface
Internet 192.168.2.2         121       fa16.3e4a.f598 ARPA   GigabitEthernet0/1
Internet 192.168.2.254       -        fa16.3e3c.7da4 ARPA   GigabitEthernet0/1
Internet 192.168.12.1        111       fa16.3e02.83a1 ARPA   GigabitEthernet0/2
Internet 192.168.12.2        -        fa16.3e01.0c98 ARPA   GigabitEthernet0/2
```


IP Routing Process

R2

- Build a new frame and send to H2



H2

- Checks the FCS
- Finds its own MAC address as the destination MAC address
- De-encapsulates the IP packet from the frame
- Finds its own IP address as the destination in the IP packet

IP Routing Process

The host has a simple decision to make:

- Is the destination on the local network?
 - Check ARP table for **destination** IP address, if empty, send an ARP request.
- Is the destination on a remote network?
 - Check ARP table for **default gateway** IP address, if empty, send an ARP request.




IP Routing Process

The router has to perform a number of tasks:

- When it receives an Ethernet frame, checks if the FCS is correct. If not, drops the frame
- Checks if the destination address of the frame is:
 - destined to router's MAC address
 - destined to a broadcast address of the network router's interface is in
 - destined to a multicast address that the router listens to
- De-encapsulates the IP packet from the frame, discard the Ethernet frame
- Looks for a match in the routing table for the destination IP address, figures out what the outgoing interface and optionally, the next hop IP address is
- Decreases the TTL field in the IP header, recalculates the header checksum
- Encapsulates the IP packet in a **new Ethernet frame**
- Checks the ARP table for the destination IP address or next hop IP address
- Transmits the frame

IP Routing Flow Chart - Remote Network

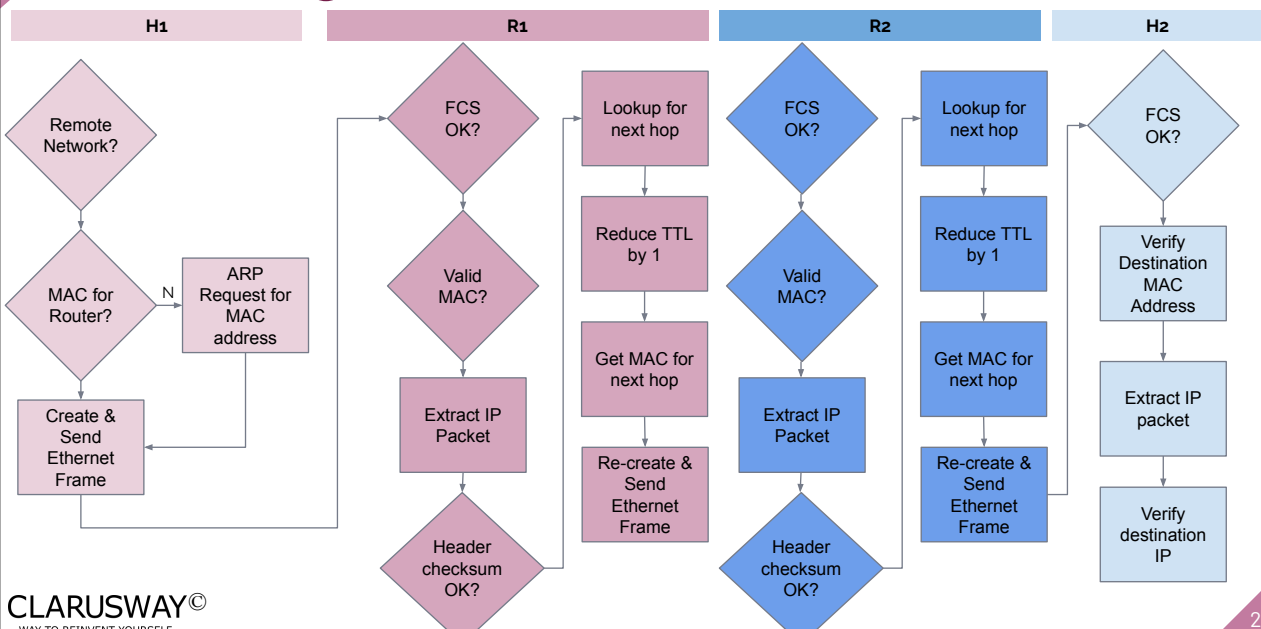




3

Static and Dynamic Routing



Static and Dynamic Routing

- How routers know the IP destinations?
- In static routing (or non-adaptive) routing, tables created and updated manually

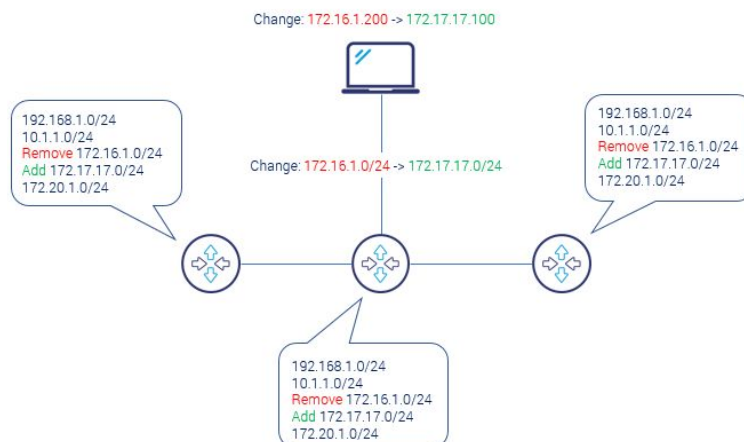



Static and Dynamic Routing

- In dynamic routing (or adaptive) routing, tables created and updated automatically using **routing protocols**
- Dynamic routing is used in larger networks
- Finds the optimal route (fastest path)
- Reacts to topology changes and failures, recalculates optimal path



Static and Dynamic Routing

Static	Dynamic
Routes are user defined	Routes are updated according to the topology
Does not use complex routing algorithms	Uses complex routing algorithms
Provides high or more security	Provides less security
Manual	Automated
Implemented in small networks	Implemented in large networks
Additional resources are not required	Additional resources are required



THANKS!

Any questions?

You can find me at:

- ▶ @David - Instructor
- ▶ david@clarusway.com

