


SC2 Sport&Pro **R1/R2** Retighten antenna connector

Version	Date	Changelog
V1	5.1.2021	First version
V2	22.1.2021	Better tightening picture
V3	25.1.2021	Add Simucube logo
V4	25.1.2021	Add note about which part to tighten



SIMUCUBE

Step 1: Disconnect all wires from the unit.

Power the unit off, disconnect all wires. Leave unit without any powered wires (DC and USB connector) for 10 minutes.

Step 2: Unscrew the back plate / Electronics Assembly


Place the motor on a clean table surface. Avoid scratching the unit.

Unscrew the two hex screws marked by **RED** circles.

NOTE: Do not let the back plate and electronics assembly to hang so that it is only supported by internal wires!





Step 3: Turn unit and open back plate

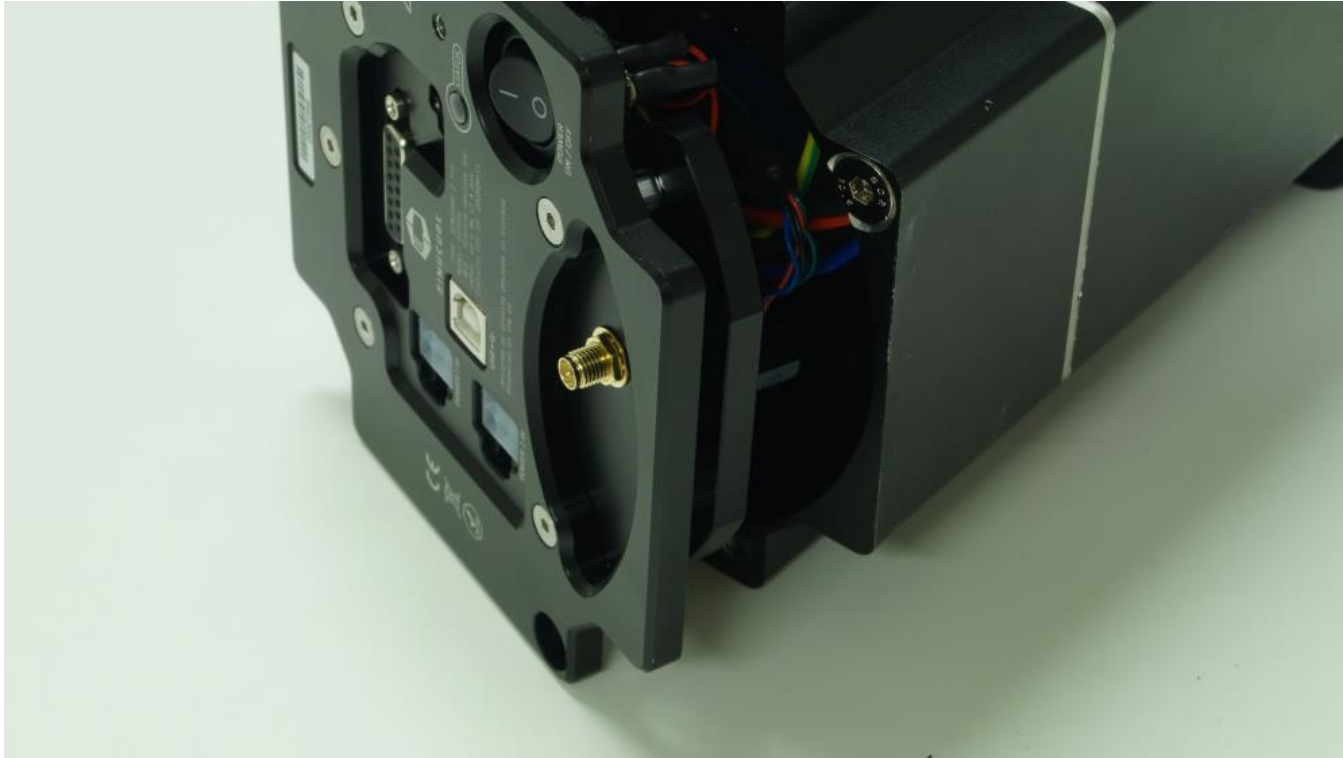


(Note: image is of a revision 1 unit, R2 opens in similar way)

Step 4: Tighten the antenna connector

Locate the antenna connector. Connector is in a different position in R1 and R2 units, but it can be accessed in similar way in both product revisions.

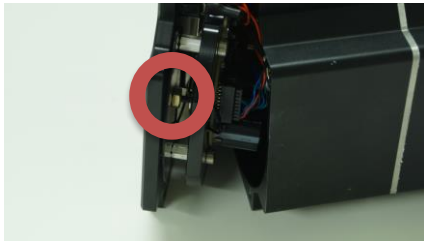

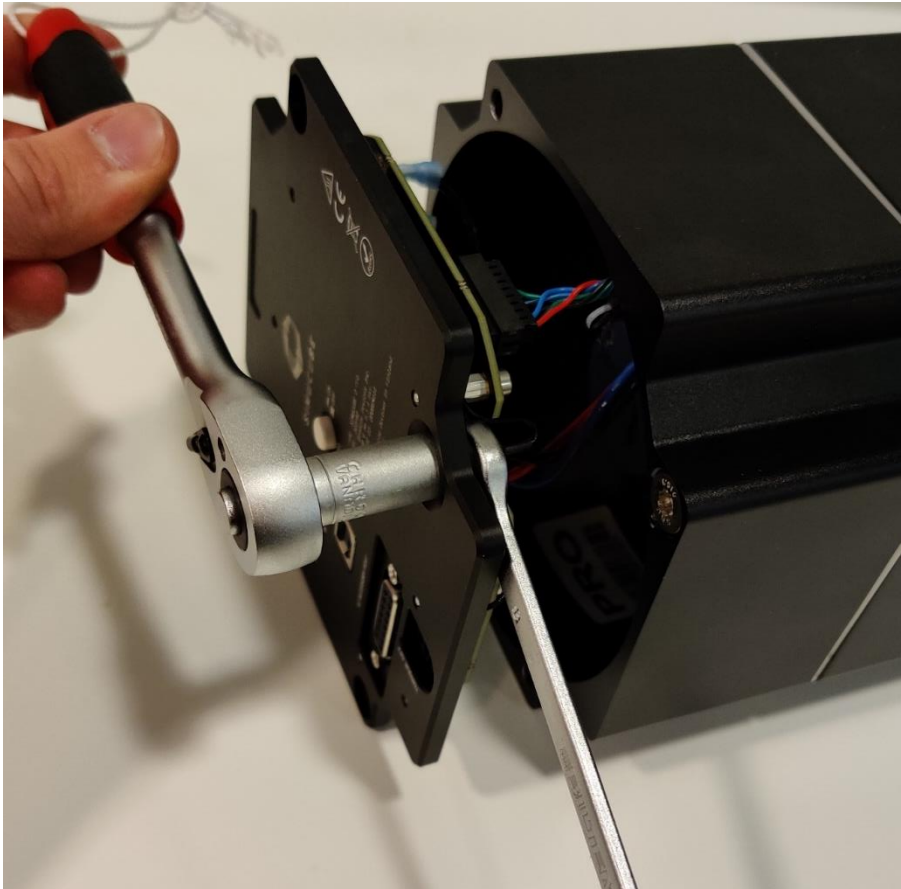

Carefully tighten the connector by using two 8 mm wrenches as follows:

- Other wrench to tighten the nut from the outside
- Hold the part on the inside to ensure the connector itself does not spin and the cable does not wind up.
- **Make sure that the thin antenna cable does not spin.**
 - If it appears to have already been spinned, turn the connector to the opposite direction first to straighten the spin.
- Do not overtighten.



Step 5: Re-attach the back plate / Electronics Assembly

Reinstall the back plate to the housing.

See Step 2 for illustration.