

GRIDPULSE INSIGHTS

Where a large load can actually connect.

We tell data center developers where their site can get power — which grid point, which operator, and how plausible it is. Germany-wide.

BUSINESS — CUSTOMERS, REVENUE, SALES

Kshitij “Krish” Jindal

Co-founder

Four businesses built in twelve years — one in energy efficiency, in India

MSc Entrepreneurship, TH OWL

PRODUCT — DATA AND MODEL

Sina Khedmati

Co-founder

MSc Power Engineering, TU Munich · MSc Management, TUM

~7 years in European power markets — Statkraft, GETEC ENERGIE, Baringa

Quantitative: price and imbalance forecasting, grid charge models

The grid is not what you wait for at the end. It is what decides the project.

HOW A SITE GETS CHECKED TODAY

- 1 The developer writes to the DSO.
- 2 The DSO passes it on internally.
- 3 Someone checks whether capacity is there, and whether the node is congested.
- 4 An answer comes back — months later.


If the answer is no: a new site, a new letter, and the wait starts again.

GERMANY — TRANSMISSION CONNECTION QUEUE


296 GW

About **4x** peak load. The queue is not a backlog to clear — it is the market you are joining.

TYPICAL BUILD TIME, YEARS

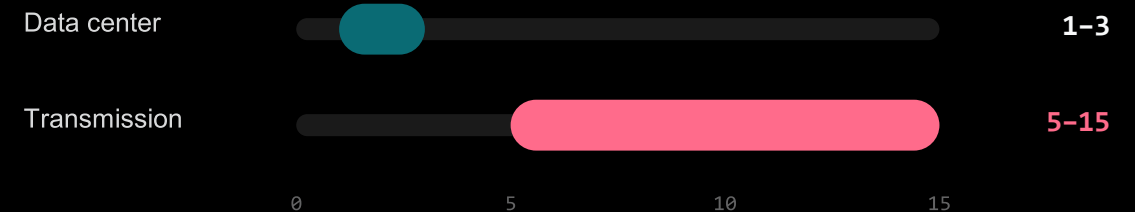

Power is the decisive constraint for data center build-out, with large connection queues and waiting times across regions

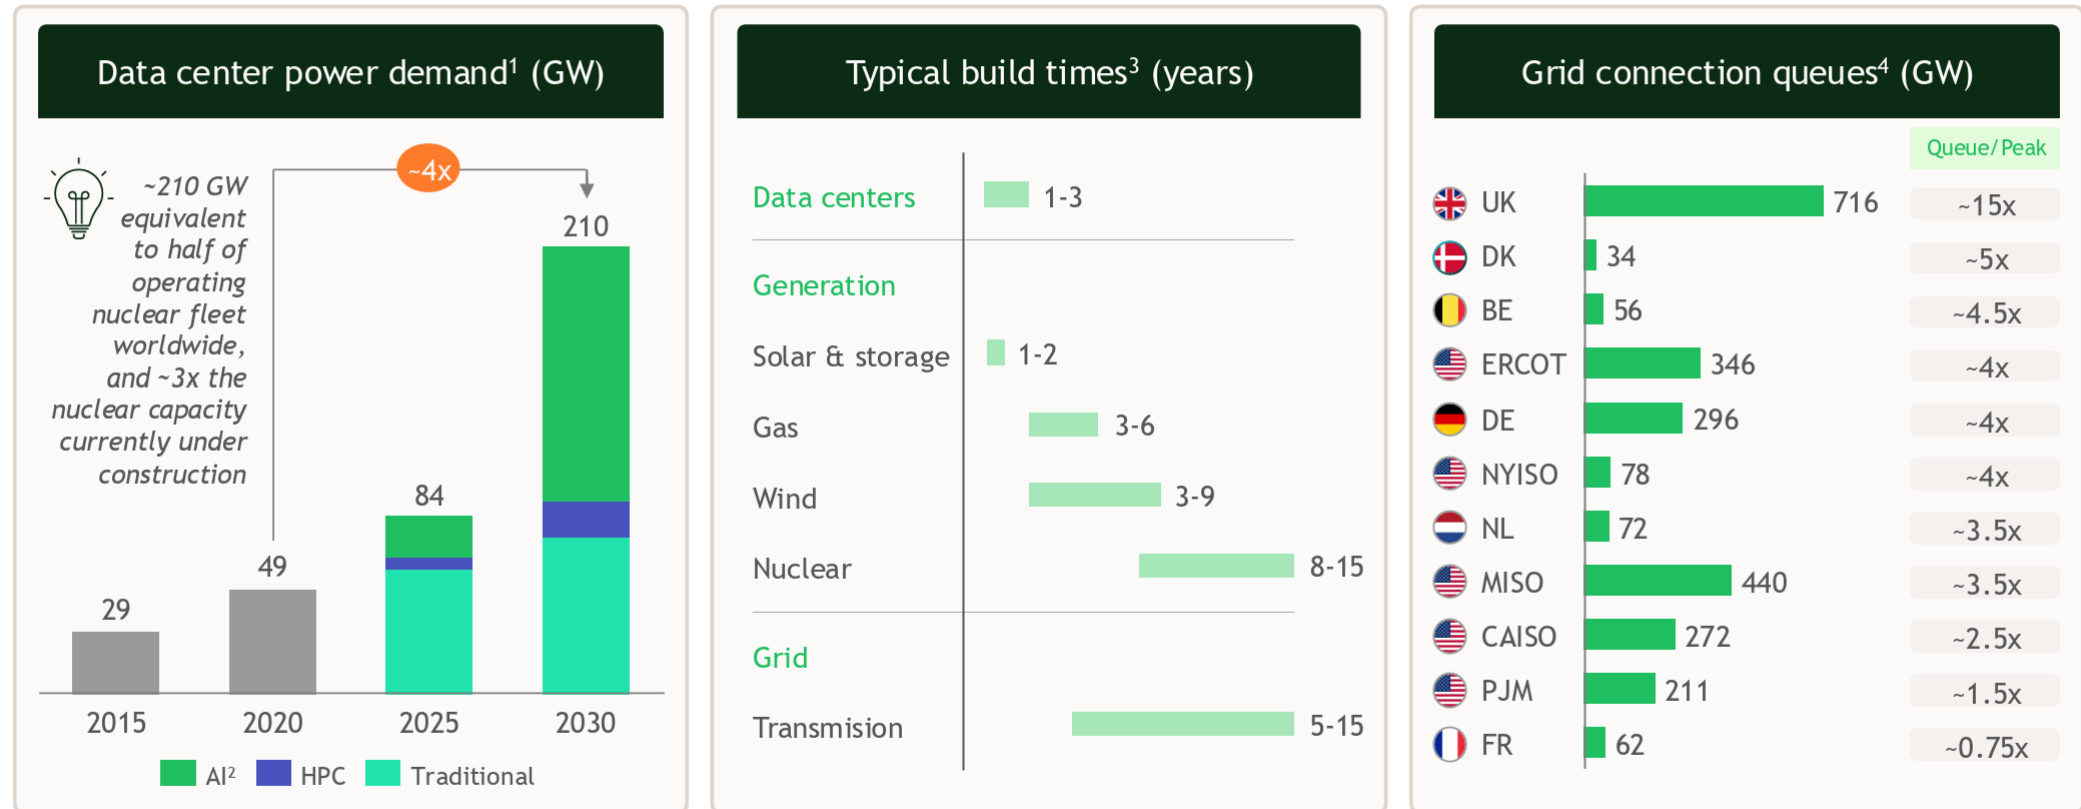

Source(s): EIA; IEA; Lazard; US DOE; Expert interviews; 2026 BCG Global Data Center Model; BCG analysis.

1. Base case trajectory based on BCG Data Center Supply Model and AI Compute Demand Model, excluding China and crypto 2. AI compute demand spans GPUs, which provide general-purpose processing for AI training and inference, and ASICs, which are custom-designed to deliver higher efficiency for specific AI workloads, often used for AI inference 3. Assumes large-scale solar and storage; wind includes onshore (range lower end) and offshore (range upper end) 4. Transmission-level queue size compared to peak load, as per the latest publicly available data in Q3 2024.

Drop a pin. **We rank the grid around it.**

1 INPUT

The site

Coordinates of the land you are considering — anywhere in Germany.

2 INPUT

The load

How much power the project needs, import and export.

3 OUTPUT

The ranking

Nearest grid points that could plausibly carry it — with operator and voltage level, ordered.

What takes years today, developers want in weeks. That is the promise we are testing.

The information exists. It is spread across **4** TSOs and roughly **870** DSOs, and there is no comparable national surface to look it up on.

The demand is the part we are **most sure about.**

WHO

3 developers

Project size - **€100–500M** range.

All three interested.

PRICE

€2,000 / month

Per company, subscription. They told us the number works.

Those historical projects are the only real ground truth in this market. **Nobody publishes it.**

GridPulse: turning a data-centre request into secure nodal headroom

A practical screening-to-validation workflow for grid-constrained infrastructure decisions

1 REQUEST

Data-centre need

- Location and load
- MW profile and timing
- Reliability and flexibility
- Commercial constraints

2 SCREEN

Candidate nodes

- Public grid context
- Land and asset signals
- Initial connection hypotheses
- DSO/TSO evidence request

3 VALIDATE

Network model gate

- Static topology and limits
- Time-varying operating states
- Units, identity and timestamps
- Reproducible calculation

4 SECURE

Nodal headroom

- Validated MW range
- Confidence and evidence class
- Asset and case linkage
- Clear next action

VALIDATION GATE

If topology, units, timing, or evidence cannot be reproduced, the result stays preliminary.

OUTPUT BOUNDARY

Before DSO/TSO confirmation: preliminary model result. Only validated, evidence-backed headroom should be treated as confirmed available capacity.

Incomplete grid data makes this an inference problem - not a lookup.

- 1 RECONSTRUCT** Resolve inconsistent assets, operators and locations into candidate grid context.
- 2 PREDICT** Estimate demand, generation and operating states across time and scenarios.
- 3 RANK WITH UNCERTAINTY** Score plausible nodes, calibrate confidence and abstain when evidence is insufficient.

AI turns fragmented evidence into comparable, uncertainty-aware location decisions.

Screening is useful only when its limits are visible.

WHAT DID NOT WORK

Turning public data directly into one exact available-capacity number.

WHAT CHANGED

GridPulse now reports a range, confidence, evidence class and the missing DSO/TSO inputs.

Trust is not a disclaimer added later. It is part of the architecture.

A trusted grid-intelligence layer for Europe's AI infrastructure.

If it works, GridPulse can move from screening one site to helping developers compare portfolios, prepare stronger operator enquiries and later coordinate flexible data-centre demand with grid conditions.

THE NEXT PROOF

- Technical reliability
- Customer urgency
- Pilot readiness

We want to prove where a large load can actually connect - and how confidently we know.