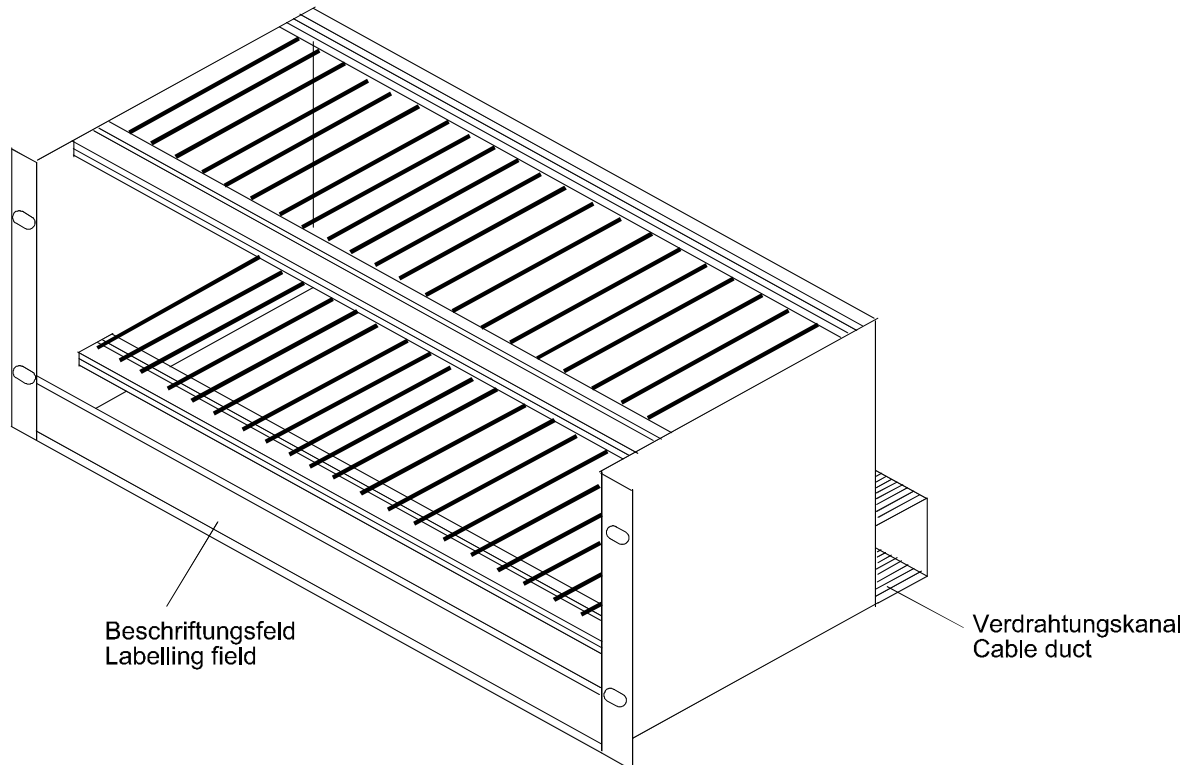


**Subrack****M 3410, M 3411, M 3412, M 3413, M 3414, M 3415, M 3419**Subrack in the 19-inches system according to EN 60297-3,
ready for wiring

The subracks have 21 slots (4 spacing units each) and are provided with one labelling field and one cable duct (two cable ducts for (Ex)i). They differ in their equipment with socket connectors:

M 3410	32-pole socket connectors, solder terminations
M 3411	28-pole socket connectors (Ex)i, solder terminations
M 3412	32-pole socket connectors, termi-point / wire-wrap
M 3413	26-pole socket connectors (Ex)i, termi-point / wire-wrap
M 3414	32-pole socket connectors, wire-wrap
M 3415	28-pole socket connectors (Ex)i, wire-wrap
M 3419	without equipment, for connectors according to EN 60303-2

Material	Aluminium
Surface	chromated
Space requirement	19 inches, 4 units high, depth 203.5 mm