




Perforated Plate M 4411

Perforated plate for subracks
In the 19-inches system according to EN 60297-3

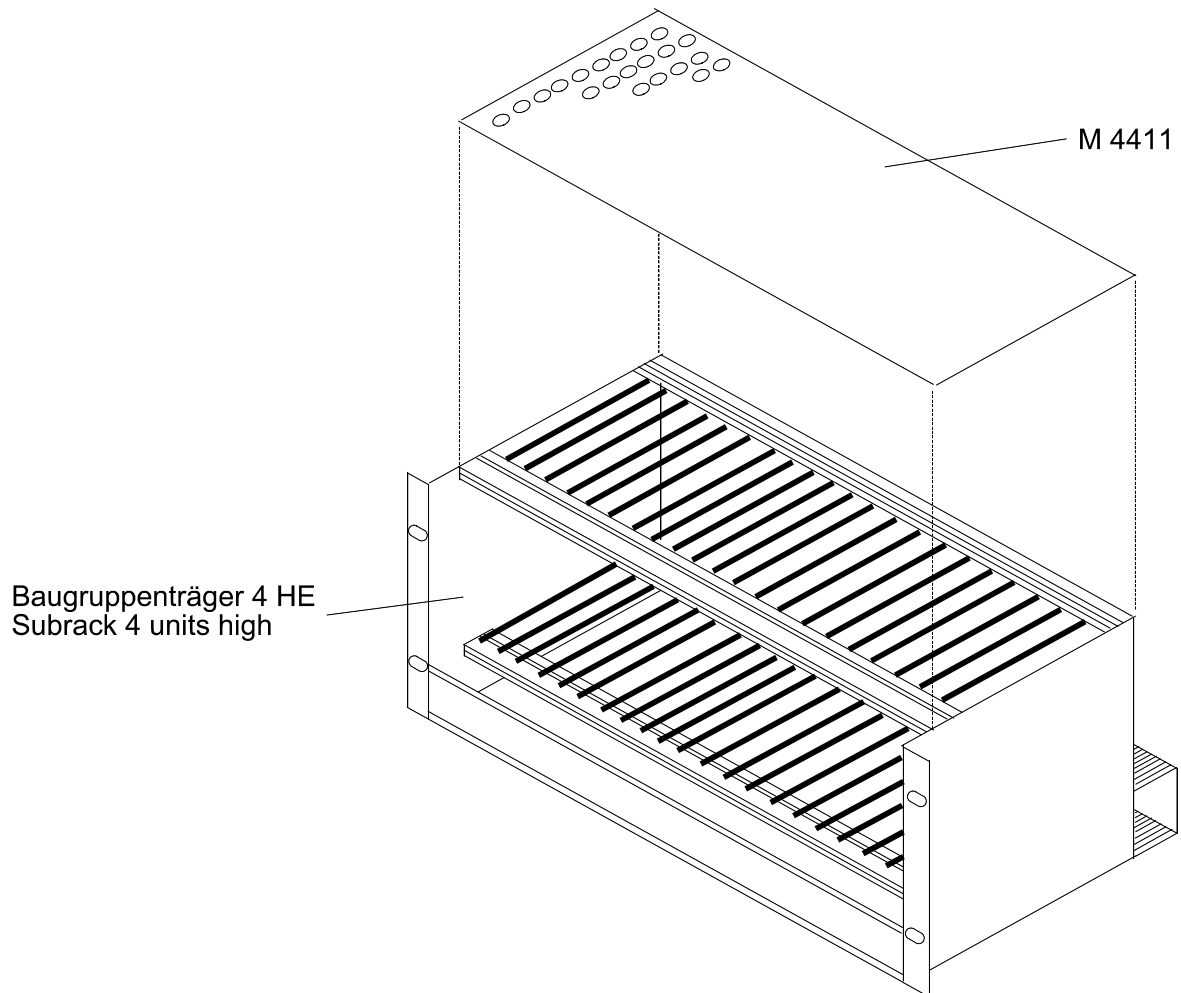

Installation:

- Dismantle one side panel of the subrack.
- Move the perforated plate between the front and rear shape of the subrack (possible above as well as below).
- Fix the side panel again.

Application:

For protection against electric shock and for screening the subrack

Material
Surface

Aluminium
chromated