

Project 1: Design of a Heat Exchanger

Sharif University of Technology
Department of Mechanical Engineering

Sina Zerehposh – 401170829

Course Instructor: Dr. Pakzad
Winter 2026

1 Introduction and Process Description

The Ilam Gas Refinery is responsible for treating sour gas and separating impurities such as CO_2 and H_2S . In the gas sweetening unit, in order to regenerate the solvent (amine) and separate the acid gases, heat must be supplied at the bottom of the regeneration column (stripper).

The objective of this project is to design a Reboiler-type heat exchanger that vaporizes the process fluid (consisting of 50% water, 25% ammonia, and 25% benzene by weight) using low-pressure steam (LP-Steam).

2 Basis for Selection of Design Parameters (Part A)

In this section, the geometric and operational parameters of the exchanger chosen by the designer are described, along with their technical justification based on engineering standards (TEMA and API) and operating conditions.

2.1 Fluid Allocation

Selecting the flow path of each fluid (shell side or tube side) is one of the most critical design steps. In this project:

- **Tube Side: Process Fluid**

- *Reason 1 (Corrosion)*: The process fluid contains 25% ammonia, which exhibits strong corrosiveness. Controlling corrosion inside the tubes by selecting an appropriate resistant tube metallurgy is far more economical than fabricating the entire pressure shell from expensive corrosion-resistant alloys.
- *Reason 2 (Pressure)*: The operating pressure of the process fluid (7.0 bar) is higher than that of the heating steam (3.5 bar). Standard practice dictates that

higher-pressure fluids should flow inside the tubes to minimize the required shell wall thickness and vessel fabrication cost.

- **Shell Side: LP-Steam**

- *Reason:* Steam is a clean, non-corrosive fluid with low viscosity. Condensation of steam across the external surfaces of the bundle provides an extremely high convective heat transfer coefficient and exhibits a minimal fouling factor (approximately $0.00018 \text{ m}^2\text{K/W}$).

2.2 Exchanger Type Selection

Based on the TEMA standard, a **BEM**-type heat exchanger was selected:

- **Front Head – Type B (Bonnet):** The simplest and most economical header type. Since frequent internal inspection of the tubes is not necessary for this service, the bolted bonnet provides an optimal and secure closure.
- **Shell – Type E (One Pass):** The standard single-pass shell configuration for phase-change and single-phase industrial thermal duties.
- **Rear Head – Type M (Fixed Tubesheet):** Since the shellside fluid (condensing steam) is exceptionally clean with minimal fouling tendency, there is no operational need for bundle pullout for mechanical cleaning (chemical cleaning is fully sufficient). Fixed-tubesheet exchangers feature the lowest capital cost, and due to the complete absence of internal floating-head gaskets, internal leakage risks of toxic ammonia and volatile benzene are eliminated, ensuring safe high-pressure containment.

2.3 Material Selection

- **Tube Material:** Austenitic Stainless Steel 304 (18Cr, 8Ni)

Justification: The presence of ammonia in the process fluid strictly rules out the use of copper-based alloys (such as brass or bronze), as ammonia aggressively attacks copper alloys via stress corrosion and dissolution. Stainless Steel 304 provides proven corrosion immunity in hot ammonia-water-benzene environments.

- **Shell Material:** Carbon Steel

Justification: The shell envelope contacts only utility steam, which is non-corrosive under normal water treatment. Carbon steel provides maximum structural strength at minimal economic cost.

2.4 Tube Geometric Specifications and Layout

- **Tube Outer Diameter and Thickness:** $OD = 22.225 \text{ mm}$ (7/8 inch), average wall thickness $t_w = 2.108 \text{ mm}$. This geometry represents an established refinery standard that provides an ideal trade-off between heat transfer area, mechanical rigidity, and hydraulic pressure drop.

- **Tube Length:** 6.706 m. Sizing with longer tubes reduces the shell internal diameter, resulting in a slimmer, longer vessel that significantly reduces fabrication and flange costs compared to large-diameter shells.
- **Tube Layout Pattern:** 30° Triangular pitch.
Justification: A 30° triangular pitch provides the maximum packing density and highest heat transfer area per unit volume. Because mechanical lane cleaning on the shell side is not required for condensing steam, a square layout (which introduces excessive dead space) is unnecessary.
- **Pitch Ratio:** 1.33 (Pitch = 29.559 mm). TEMA requires a minimum center-to-center pitch ratio of 1.25. A ratio of 1.33 ensures adequate ligament thickness for reliable mechanical tube expansion into the tubesheet.

2.5 Baffle Geometry

- **Type:** Single-Segmental Carbon Steel baffles
- **Baffle Cut:** 25% diametral cut
- **Spacing:** Central spacing of approximately 233 mm (24 crosspasses)

This layout was selected to promote crossflow across the condensing vapor while providing structural support to eliminate flow-induced acoustic and mechanical vibrations.

3 Summary of Design Operating Conditions

Table 1 summarizes the thermodynamic and operational boundary conditions applied in HTRI based on project criteria and engineering decisions.

Parameter	Tube Side (Process Fluid)	Shell Side (LP-Steam)
Mass Flow Rate	25,000 kg/hr	5646.8 kg/hr (Calculated)
Temperature (In → Out)	70.00°C → 111.33°C	138.94°C → 137.61°C
Operating Pressure	7.0 bar (700 kPa)	3.5 bar (350 kPa)
Vapor Fraction ($x_{in} \rightarrow x_{out}$)	0.0 → 0.50 (Boiling)	1.0 → 0.0 (Condensing)
Fouling Factor	0.000350 m ² K/W	0.000180 m ² K/W
Design Pressure	22 bar (2200 kPaG)	10 bar (1000 kPaG)
Design Temperature	200°C	150°C
Number of Tube Passes	2 passes	1 pass

Table 1: Summary of process boundary conditions and operational inputs.

Note on the Number of Tube Passes: Although a single tube pass was initially assumed as a baseline, the final design incorporates 2 tube passes. This configuration increases tubeside fluid velocity, enhances the boiling heat transfer coefficient, and mitigates stratified flow and localized film boiling risks.

3.1 Conclusion of Part A

Based on the parameters above, a TEMA BEM heat exchanger with 285 Stainless Steel 304 tubes of 6.706 m length was designed. This configuration delivers the required process duty of 3.41 MW while satisfying all hydraulic pressure drop and fouling constraints.

3.2 HTRI Specification Sheet – Base Case (25,000 kg/hr)

HTRI		HEAT EXCHANGER SPECIFICATION SHEET				Page 1 SI Units	
Customer				Job No.			
Address				Reference No.			
Plant Location				Proposal No.			
Service of Unit				Date 2/22/2026 Rev			
Size 1168.4 x 2438 mm Type AES Horizontal				Item No.			
Surf/Unit (Gross/Eff) 137.59 / 131.68 m ² Shell/Unit 1				Connected In 1 Parallel 1 Series			
Surf/Shell (Gross/Eff) 137.59 / 131.68 m ²				Surf/Shell (Gross/Eff) 137.59 / 131.68 m ²			
PERFORMANCE OF ONE UNIT							
Fluid Allocation		Shell Side		Tube Side			
Fluid Name		steam		sea water			
Fluid Quantity, Total kg/hr		40198		820798			
Vapor (In/Out)		40198		820798			
Liquid		40198		820798			
Steam		40198		820798			
Water		40198		820798			
Noncondensables							
Temperature (In/Out) C		154.20		18.00		42.50	
Specific Gravity		0.9031		1.0132		0.9946	
Viscosity mN-s/m ²		0.0141		0.1797		1.0524	
Molecular Weight, Vapor							
Molecular Weight, Noncondensables							
Specific Heat kJ/kg-C		1.9769		4.5759		4.3145	
Thermal Conductivity W/m-C		0.0304		0.6864		0.6002	
Latent Heat kJ/kg		2130.2		2132.6			
Inlet Pressure kPa		500.00		400.00			
Velocity m/s		8.75		2.19			
Pressure Drop, Allow/Calc kPa		25.000		10.097		50.000	
Fouling Resistance (min) m ² -K/W		0.000000				0.000400	
Heat Exchanged 24002421 W		MTD (Corrected) 120.1 C					
Transfer Rate, Service 1517.3 W/m ² -K		Clean 5182.8 W/m ² -K		Actual 1531.2 W/m ² -K			
CONSTRUCTION OF ONE SHELL							
		Shell Side		Tube Side		Sketch (Bundle/Nozzle Orientation)	
Design/Test Pressure kPaG		517.11 /		517.11 /			
Design Temperature C		182.22		71.11			
No Passes per Shell		1		2			
Corrosion Allowance mm		3.175		3.175			
Connections		1 @ 300.00		1 @ 387.35			
Size & Rating		1 @ 205.00		1 @ 387.35			
Tube No. 943		OD 19.050 mm		Thk(Avg) 1.245 mm		Length 2.438 m	
Tube Type Plain		Material Aluminum brass (78 Cu, 2 Al)		Tube pattern 30			
Shell Carbon steel		ID 1168.4 OD 1193.8 mm		Shell Cover		(Remove.)	
Channel or Bonnet		Channel Cover		Tubesheet-Floating			
Tubesheet-Stationary		Impingement Plate		Rods			
Floating Head Cover		Type NTIW-Seg.		%Cut (Diam) 25		Spacing(c/c) 380.67	
Baffles-Cross		Seal Type None		Inlet 785.95 mm			
Baffles-Long		U-Bend		Type None			
Supports-Tube		Tube-Tubesheet Joint		Expanded (No groove)			
Bypass Seal Arrangement 5 pairs seal strips		Type					
Expansion Joint		Bundle Entrance 1280.7		Bundle Exit 18.70		kg/m-s ²	
Rho-V2-Inlet Nozzle 9547.0 kg/m-s ²		Tube Side Mach. Mtl. (Kammprofile/Flex. Face)					
Gaskets-Shell Side Mach. Mtl. (Kammprofile/Flex. Face)		Tube Side Mach. Mtl. (Kammprofile/Flex. Face)					
- Floating Head Mach. Mtl. (Kammprofile/Flex. Face)							
Code Requirements		TEMA Class R					
Weight/Shell 6885.4 kg		Filled with Water 11489 kg		Bundle 3002.8 kg			
Remarks: Use deresonating baffles.							

Reprinted with Permission (v7.3.2)

Figure 1: HTRI Heat Exchanger Specification Sheet – Base Case (25,000 kg/hr).

3.3 HTRI Output Summary – Base Case

Design: Horizontal Multipass Flow TEMA BEM Shell With Single-Segmental Baffles. No Data Check Messages (see Runtime Message Report for Warning Messages).

Process Conditions	Hot Shellside (LP-Steam)	Cold Tubeside (Process)
Flow Rate (kg/s)	1.5686	6.9444
Inlet/Outlet Vapor Fraction (Wt.)	1.0000 / 0.0000	0.0000 / 0.5000
Inlet/Outlet Temperature (°C)	138.94 / 137.61	70.00 / 111.33
Inlet Pressure / Avg (kPa)	350.00 / 343.51	700.00 / 690.00
ΔP Calculated / Allowable (kPa)	12.974 / 30.000	19.999 / 30.000
Fouling Resistance (m ² -K/W)	0.000180	0.000350

Exchanger Performance			
Shell h (W/m ² -K)	16,090	Actual U (W/m ² -K)	814.46
Tube h (W/m ² -K)	2971.9	Required U (W/m ² -K)	683.40
Hot Regime	Transition	Duty (MW)	3.4069
Cold Regime	Transition	Effective Area (m ²)	131.04
EMTD (°C)	38.0	Overdesign (%)	19.18

Shell Geometry		Baffle Geometry	
TEMA Type	BEM	Baffle Type	Single-Segmental
Shell ID (mm)	584.20	Baffle Cut (% Dia.)	25
Series / Parallel	1 / 1	Central Spacing (mm)	232.97
Orientation (deg)	0.00	Crosspasses	24

Tube Geometry		Nozzles	
Tube Type	Plain	Shell Inlet / Outlet (mm)	205.00 / 102.26
Tube OD (mm)	22.225	Shell Nozzle Heights (In/Out)	28.36 / 15.13 mm
Tube Length (m)	6.706	Tube Inlet / Outlet (mm)	77.93 / 205.00
Pitch Ratio / Layout	1.3300 / 30°	Tube Pass Count	2
Tube Count	285		

Thermal Resistance Breakdown (%)		Velocities (m/s)		
Shell Condensing Film	5.06		Min	Max
Tube Boiling Film	33.82	Tubeside	0.24	10.50
Fouling Resistance	49.84	Crossflow	0.19	13.74
Tube Metal Wall	11.28	Window	0.026	13.75
Flow Fractions				
Stream A	0.198			
Stream B	0.470			
Stream C	0.100			
Stream E	0.149			
Stream F	0.083			

Table 2: HTRI Output Summary – Base Case (25,000 kg/hr).

4 Performance Analysis Under Increased Capacity (Part B)

4.1 Comparison of Design Data

Table 3 presents a side-by-side comparison between the baseline design (25,000 kg/hr) and the debottlenecked case (30,000 kg/hr). In this analysis, tube diameter and tube length were held constant to isolate the net impact of the throughput increase.

Parameter	Base Design	Expanded Design	% Change / Engineering Notes
Tubeside Mass Flow Rate	25,000 kg/hr	30,000 kg/hr	+20.0%
Thermal Duty (Q)	3.407 MW	4.086 MW	+19.9% (Directly proportional)
Tube Outer Diameter	22.225 mm	22.225 mm	Fixed (Standard)
Tubeside Passes	2 passes	2 passes	Fixed (Maintains velocity)
Total Tube Count	285	333	Increased to provide required area
Tubeside Pressure Drop	19.99 kPa	21.56 kPa	Modest increase (< 30 kPa allowable)
Overall Heat Transfer Coeff.	814.5 W/m ² K	823.49 W/m ² K	+1.1% (Enhanced convective turbulence)
Overdesign Margin	19.18%	17.86%	Maintained at safe operational levels

Table 3: Comparison of thermal-hydraulic data between base and increased-capacity operations.

4.2 Technical Analysis of Results

4.2.1 Thermal Capability at High Flow Rate

Software convergence indicates that when the flow rate is scaled to 30,000 kg/hr:

- **Thermal Duty:** Expands to 4.086 MW, achieving the target outlet vapor fraction ($x = 0.50$).

- **Overdesign Margin:** Remains robust at 17.86%. This confirms that the unit operates reliably under expanded capacity while retaining adequate surplus area to absorb long-term fouling.

4.2.2 Hydraulic Behavior and Pressure Losses

- **Tubeside Pressure Drop:** Evaluated at 21.56 kPa, well below the allowable limit of 30.0 kPa.
- **Fluid Velocity:** The in-tube velocity (5.10 m/s max mixture velocity) remains within allowable erosion and vibration thresholds, maintaining a high convective film coefficient.

4.3 HTRI Specification Sheet – Increased-Capacity Case (30,000 kg/hr)


HTRI		HEAT EXCHANGER SPECIFICATION SHEET				Page 1 SI Units	
Customer				Job No.			
Address				Reference No.			
Plant Location				Proposal No.			
Service of Unit				Date 2/23/2026		Rev	
Size 1168.4 x 2438 mm Type AES Horizontal				Connected In 1 Parallel 1 Series		Item No.	
Surf/Unit (Gross/Eff) 172.75 / 166.23 m2				Shell/Unit 1		Surf/Shell (Gross/Eff) 172.75 / 166.23 m2	
PERFORMANCE OF ONE UNIT							
Fluid Allocation		Shell Side		Tube Side			
Fluid Name		steam		sea water			
Fluid Quantity, Total kg/hr		40198		820798			
Vapor (In/Out)		40198		820798		820798	
Liquid		40198		820798		820798	
Steam		40198		820798		820798	
Water		40198		820798		820798	
Noncondensables							
Temperature (In/Out) C		154.20		151.12		18.00 42.50	
Specific Gravity		0.9031		1.0132		0.9946	
Viscosity mN-s/m2		0.0141		0.1797		1.0524 0.6216	
Molecular Weight, Vapor							
Molecular Weight, Noncondensables							
Specific Heat kJ/kg-C		1.9769		4.5761		4.3145 4.3165	
Thermal Conductivity W/m-C		0.0304		0.6864		0.6002 0.6346	
Latent Heat kJ/kg		2130.2		2132.4			
Inlet Pressure kPa		500.00		400.00			
Velocity m/s		7.72		0.89			
Pressure Drop, Allow/Calc kPa		25.000		9.614		50.000 5.155	
Fouling Resistance (min) m2-K/W		0.000000		0.000400			
Heat Exchanged 24001169 W				MTD (Corrected) 120.4 C			
Transfer Rate, Service 1199.6 W/m2-K				Clean 2731.5 W/m2-K Actual 1210.3 W/m2-K			
CONSTRUCTION OF ONE SHELL				Sketch (Bundle/Nozzle Orientation)			
Design/Test Pressure kPaG		517.11 /		517.11 /			
Design Temperature C		182.22		71.11			
No Passes per Shell		1		1			
Corrosion Allowance mm		3.175		3.175			
Connections In mm		1 @ 300.00		1 @ 387.35			
Size & Rating Out mm		1 @ 205.00		1 @ 387.35			
Intermediate		@		@			
Tube No. 1184		OD 19.050 mm		Thk(Avg) 1.245 mm		Length 2.438 m Pitch 25.337 mm	
Tube Type Plain				Material Titanium-grade 2		Tube pattern 30	
Shell Carbon steel		ID 1168.4 OD 1193.8 mm		Shell Cover		(Remove.)	
Channel or Bonnet				Channel Cover			
Tubesheet-Stationary				Tubesheet-Floating			
Floating Head Cover				Impingement Plate		Rods	
Baffles-Cross		Type NTIW-Seg.		%Cut (Diam) 25		Spacing(c/c) 700.00 Inlet 822.96 mm	
Baffles-Long				Seal Type None			
Supports-Tube				U-Bend		Type None	
Bypass Seal Arrangement 5 pairs seal strips				Tube-Tubesheet Joint Expanded (No groove)			
Expansion Joint				Type			
Rho-V2-Inlet Nozzle 9547.0 kg/m-s2				Bundle Entrance 1245.9		Bundle Exit 17.37 kg/m-s2	
Gaskets-Shell Side Mach. Mtl. (Kammprofile\Flex. Face)				Tube Side Mach. Mtl. (Kammprofile\Flex. Face)			
- Floating Head Mach. Mtl. (Kammprofile\Flex. Face)							
Code Requirements				TEMA Class R			
Weight/Shell 5515.3 kg		Filled with Water 9969.8 kg		Bundle 2073.7 kg			
Remarks: Use deresonating baffles.							
Reprinted with Permission (v7.3.2)							

Figure 2: HTRI Heat Exchanger Specification Sheet – Increased-Capacity Case (30,000 kg/hr).

4.4 HTRI Output Summary – Increased-Capacity Case

Design: Horizontal Multipass Flow TEMA BEM Shell With Single-Segmental Baffles. No Data Check Messages (see Runtime Message Report for Warning Messages).

Process Conditions	Hot Shellside (LP-Steam)	Cold Tubeside (Process)
Flow Rate (kg/s)	1.8819	8.3333
Inlet/Outlet Vapor Fraction (Wt.)	1.0000 / 0.0000	0.0000 / 0.5000
Inlet/Outlet Temperature (°C)	138.94 / 137.75	70.00 / 111.25
Inlet Pressure / Avg (kPa)	350.00 / 344.21	700.00 / 689.22
ΔP Calculated / Allowable (kPa)	11.572 / 30.000	21.561 / 30.000
Fouling Resistance (m ² -K/W)	0.000180	0.000350

Exchanger Performance			
Shell h (W/m ² -K)	15,854	Actual U (W/m ² -K)	823.49
Tube h (W/m ² -K)	3078.6	Required U (W/m ² -K)	698.71
Hot Regime	Transition	Duty (MW)	4.0863
Cold Regime	Transition	Effective Area (m ²)	152.97
EMTD (°C)	38.2	Overdesign (%)	17.86

Shell Geometry		Baffle Geometry	
TEMA Type	BEM	Baffle Type	Single-Segmental
Shell ID (mm)	635.00	Baffle Cut (% Dia.)	25
Series / Parallel	1 / 1	Central Spacing (mm)	264.43
Orientation (deg)	0.00	Crosspasses	21

Tube Geometry		Nozzles	
Tube Type	Plain	Shell Inlet / Outlet (mm)	258.88 / 102.26
Tube OD (mm)	22.225	Shell Nozzle Heights (In/Out)	40.30 / 21.25 mm
Tube Length (m)	6.706	Tube Inlet / Outlet (mm)	77.93 / 258.88
Pitch Ratio / Layout	1.3300 / 30°	Tube Pass Count	2
Tube Count	333		

Thermal Resistance Breakdown (%)		Velocities (m/s)		
Shell Condensing Film	5.19		Min	Max
Tube Boiling Film	33.01	Tubeside	0.24	10.94
Fouling Resistance	50.39	Crossflow	0.20	13.48
Tube Metal Wall	11.40	Window	0.027	13.71
Flow Fractions				
Stream A	0.198			
Stream B	0.470			
Stream C	0.106			
Stream E	0.139			
Stream F	0.087			

Table 4: HTRI Output Summary – Increased-Capacity Case (30,000 kg/hr).

5 Response to the Project Question: Linearity of Area vs. Flow Rate

Question: Is the relationship between the percentage increase in process flow rate and the required heat transfer surface area strictly linear (+20% flow $\rightarrow$ +20% area)?

Analysis and Answer: No, the relationship is sub-linear. The required heat transfer area increases by only +16.74% (131.04 m² $\rightarrow$ 152.97 m²) for a +20.0% expansion in throughput.

Governing formulation:

$$Q = U \cdot A \cdot \Delta T_{LM} \quad (1)$$

1. Increasing process flow rate by 20% proportionally increases the thermal duty Q by approximately 20%.
2. Simultaneously, higher mass flux elevates fluid velocity inside the tubes, which increases the Reynolds number (Re).
3. Because the convective boiling coefficient obeys $h_i \propto Re^{0.8}$, higher turbulence increases h_{tube} from 2971.9 to 3078.6 W/m²K, which in turn raises the overall heat transfer coefficient U from 814.5 to 823.5 W/m²K.
4. Because the overall heat transfer coefficient U increases, the required heat transfer surface area A does not need to scale by the full 20%.

Conclusion: Capacity expansion improves the convective transport coefficient, causing the required area growth slope to be lower than the mass throughput increase ($dA/d\dot{m} < A_0/\dot{m}_0$).

6 Review of Error and Warning Messages (Part C)

“The calculated or specified terminal temperatures are impossible. Check the specified physical properties and process conditions, and rerun the case. Run Failed.”

Resolution of Pressure and Temperature Inconsistency: The software encountered terminal temperature contradictions during initial thermodynamic calculations. Specifying operating pressures consistently in Pascal units and re-verifying stream thermodynamic property curves eliminated this fatal error.

“Wavy stratified flow and partial dryout are expected in horizontal tubes. We recommend increasing flow rate or reducing tube diameter to avoid stratified flow because of its poor heat transfer performance and high uncertainty in predicting boiling heat transfer coefficients in this flow regime.”

Resolution of Stratified Flow and Dryout Warning: Selecting a 2-pass tube arrangement increased in-tube liquid-vapor velocity, maintaining an annular/intermittent flow regime and avoiding poor wetted-perimeter heat transfer associated with wavy stratified flow.

“Impingement rod width ratio has been reduced to fit the array into the shell while permitting a one-half diameter bundle of tubes.”

Correction by Adjusting Impingement Protection: To mitigate shellside inlet erosive forces ($\rho V^2 > 1000 \text{ kg/m} \cdot \text{s}^2$), impingement rods were introduced. The rod diameter ratio was adjusted to fit the array into the shell while preserving bundle entrance area.

“Unspecified channelside gasket – defaulting to gasket code 5054 – Kammprofile.”

Channel Gasket Definition: Resolved by assigning gasket code 5054 (Kammprofile metal core with flexible graphite facing), which matches high-pressure sour service criteria.

“ASME Section VIII Div. 1 Code was used to ESTIMATE all pressure vessel dimensions and weights. The dimensions in this report cannot be used to fabricate the vessel.”

This is a standard informational disclaimer from HTRI stating that mechanical shell thicknesses and vessel weights are preliminary estimates for thermal simulation and must be confirmed via structural code calculations (such as PVElite).

“Transition boiling has been predicted in at least one increment on the tube side. To confirm, check tubeside monitor for increments in transition boiling.”

This message indicates localized transition between nucleate and film boiling due to elevated wall heat fluxes. Because the mean temperature driving force is moderate (EMTD $\approx 38^\circ\text{C}$), local wall heat fluxes remain safely below critical heat flux ($q'' < q''_{\text{CHF}}$), ensuring stable operation without sustained dryout.

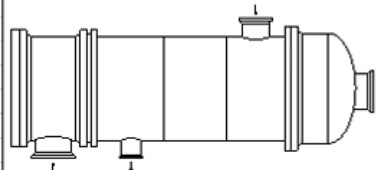
HTRI		HEAT EXCHANGER SPECIFICATION SHEET										Page 1 SI Units	
Customer												Job No.	
Address												Reference No.	
Plant Location												Proposal No.	
Service of Unit												Date 2/24/2026 Rev	
Size 1168.4 x 2438 mm Type AES Horizontal												Item No.	
Surf/Unit (Gross/Eff) 157 / 150.86 m2 Shell/Unit 1												Connected In 1 Parallel 1 Series	
Surf/Shell (Gross/Eff) 157 / 150.86 m2													
PERFORMANCE OF ONE UNIT													
Fluid Allocation				Shell Side				Tube Side					
Fluid Name				steam				sea water					
Fluid Quantity, Total kg/hr				40198				820798					
Vapor (In/Out)				40198									
Liquid								820798 820798					
Steam				40198									
Water								820798 820798					
Noncondensables													
Temperature (In/Out) C				154.20 151.12				18.00 42.50					
Specific Gravity				0.9031				1.0132 0.9946					
Viscosity mN-s/m2				0.0141 0.1797				1.0524 0.6218					
Molecular Weight, Vapor													
Molecular Weight, Noncondensables													
Specific Heat kJ/kg-C				1.9769 4.5761				4.3145 4.3165					
Thermal Conductivity W/m-C				0.0304 0.6864				0.6002 0.6346					
Latent Heat kJ/kg				2130.2 2132.4									
Inlet Pressure kPa				500.00				400.00					
Velocity m/s				7.70				0.84					
Pressure Drop, Allow/Calc kPa				25.000 9.612				50.000 4.758					
Fouling Resistance (min) m2-K/W				0.000000				0.000400					
Heat Exchanged 24001169 W				MTD (Corrected) 120.4 C									
Transfer Rate, Service 1321.9 W/m2-K				Clean 3081.3 W/m2-K				Actual 1334.3 W/m2-K					
CONSTRUCTION OF ONE SHELL													
				Shell Side				Tube Side					
Design/Test Pressure kPaG				517.11 /				517.11 /					
Design Temperature C				182.22				71.11					
No Passes per Shell				1				1					
Corrosion Allowance mm				3.175				3.175					
Connections		In mm	1 @ 300.00	1 @ 387.35									
Size & Rating		Out mm	1 @ 205.00	1 @ 387.35									
		Intermediate	@	@									
													
Tube No. 1076		OD 19.050 mm	Thk(Avg) 0.559 mm	Length 2.438 m		Pitch 25.337 mm							
Tube Type Plain		Material Titanium-grade 2		Tube pattern 30									
Shell Carbon steel		ID 1168.4	OD 1193.8 mm	Shell Cover (Remove.)									
Channel or Bonnet		Channel Cover											
Tubesheet-Stationary		Tubesheet-Floating											
Floating Head Cover		Impingement Plate Rods											
Baffles-Cross		Type NTIW-Seg.	%Cut (Diam) 25	Spacing(c/c) 700.00		Inlet 821.38 mm							
Baffles-Long		Seal Type None											
Supports-Tube		U-Bend				Type None							
Bypass Seal Arrangement 5 pairs seal strips		Tube-Tubesheet Joint Expanded (No groove)											
Expansion Joint		Type											
Rho-V2-Inlet Nozzle 9547.0 kg/m-s2		Bundle Entrance 1250.8		Bundle Exit 17.44 kg/m-s2									
Gaskets-Shell Side Mach. Mtl. (Kammprofile\Flex. Face)		Tube Side Mach. Mtl. (Kammprofile\Flex. Face)											
- Floating Head Mach. Mtl. (Kammprofile\Flex. Face)													
Code Requirements TEMA Class R													
Weight/Shell 5141.0 kg		Filled with Water 9680.2 kg		Bundle 1699.8 kg									
Remarks: Use deresonating baffles.													
Reprinted with Permission (v7.3.2)													

Figure 3: HTRI Output.

	Runtime Messages Released to the following HTRI Member Co 989144785264
Xist 7.3.2 2/22/2026 16:33 SN: 46639-	
Design - Horizontal Multipass Flow TEMA AES Shell With NTIW-Segmental	
Unit ID 100 - WARNING MESSAGES (CALCULATIONS CONTINUE)	
The maximum process temperature is outside the correlational range of the thermal conductivity was calculated at the temperature limit. For tube metal 176.1 F.	
Deresonating baffles placed at $0.45 \times \text{Shell ID}$ will resolve the first fundamental vibration. Two deresonating baffles placed at $0.18 \times \text{Shell ID}$ and $0.45 \times \text{Shell ID}$ modes for acoustic vibration. User must ensure that the proper number of t deresonating baffles. Xist HAS NOT taken this reduction in heat transfer sur	
ASME Section VIII Div. 1 Code was used to ESTIMATE all pressure vessel c dimensions in this report cannot be used to fabricate the vessel.	
Rear head ID may be too large to permit a floating tubesheet smaller than th	

Figure 4: HTRI Output.

7 Summary

The thermal-hydraulic design developed in this project provides a reliable solution across both operating throughputs:

- **Configuration:** TEMA BEM Shell-and-Tube Exchanger ($D_{\text{shell}} = 584.2$ mm for base design, expanding to 635.0 mm for debottlenecked case).
- **Tubing:** Stainless Steel 304 plain tubes ($D_o = 22.225$ mm, length $L = 6.706$ m, 2 passes).
- **Base Operations (25,000 kg/hr):** Requires 285 tubes, transferring 3.41 MW with 19.18% overdesign and a low pressure drop ($\Delta P_t = 19.99$ kPa, $\Delta P_s = 12.97$ kPa).
- **Expanded Operations (30,000 kg/hr):** Debottlenecked to 333 tubes, transferring 4.09 MW with 17.86% overdesign and safe hydraulic margins ($\Delta P_t = 21.56$ kPa < 30 kPa).