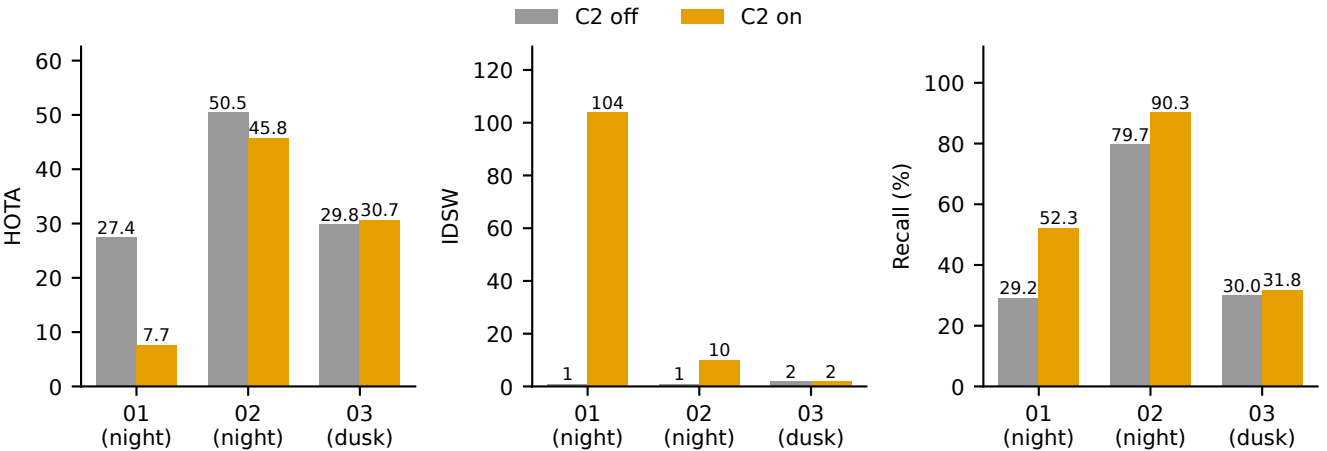

C2 on (adapter epoch 4), τ per frame — 01: τ 0.307–0.320 (mean 0.311); 02: τ 0.327–0.340 (mean 0.332); 03: τ 0.355–0.452 (mean 0.404).
C2 off: τ = 0.5 fixed.

Phase 5 ckpt_4 (never trained on IOTD) on all three IOTD sequences; seq_01 and seq_03 are IOTD training sequences.
Single run, det/track 0.5, miss tolerance 30. Not statistically established.