

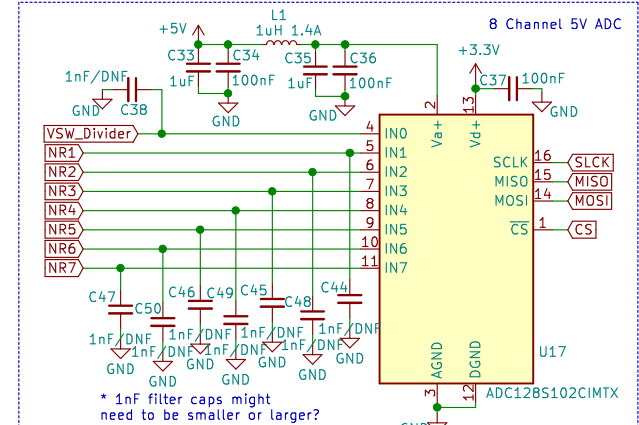



### 24V Boost to 25V-40V @ 4A Converter

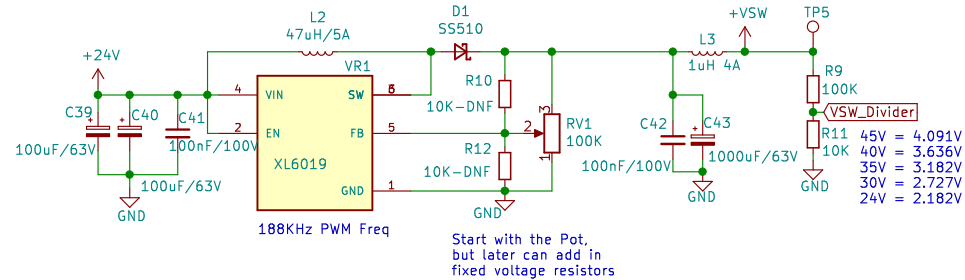


### 24V to 6V Buck converter Drives the ESP32 + Sensors

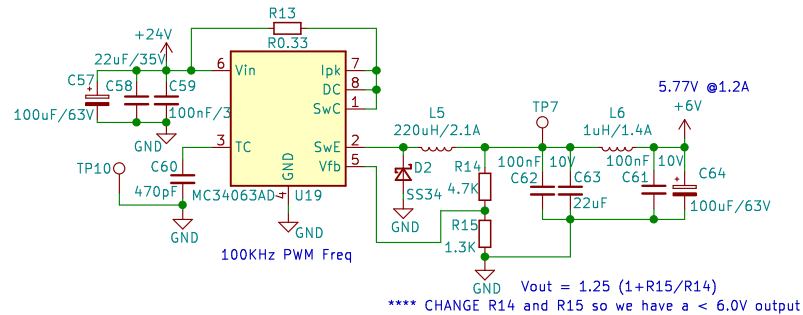


### 5V and 3.3V LDO Regulators

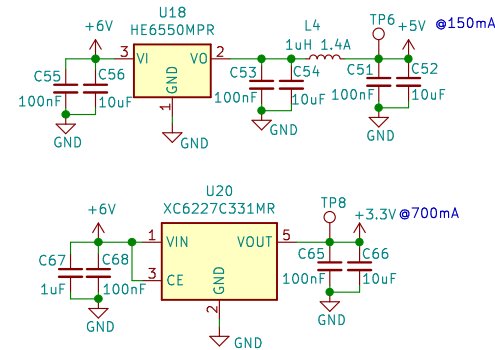

### 24V Power Input + Reverse Polarity Protection



### Power Supply LEDs

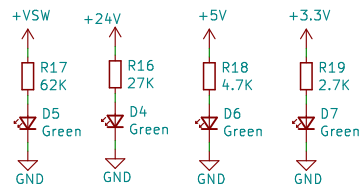

Open Hardware

PRL

Sheet: /Power/

File: Power.sch

**Title: Open-PyroJet-Driver - Power**

Size: A4 Date: 2022-05-12

KiCad E.D.A. kicad (5.1.12)-1

**Rev: 0.6b**

Id: 2/2