



NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

Question 22

Answer saved

Marked out of 1.0

Flag question

What is split horizon?


Select one:

- It splits the traffic when you have a large bus (horizon) physical network.
- It defines the path to forward the IP data traffic
- It holds the regular updates from broadcasting to a downed link.
- Information about a route should not be sent back in the direction from which the original update message arrived.**
- It prevents regular update messages from reinstating a route that has gone down.


Previous page



Type here to search



DELL

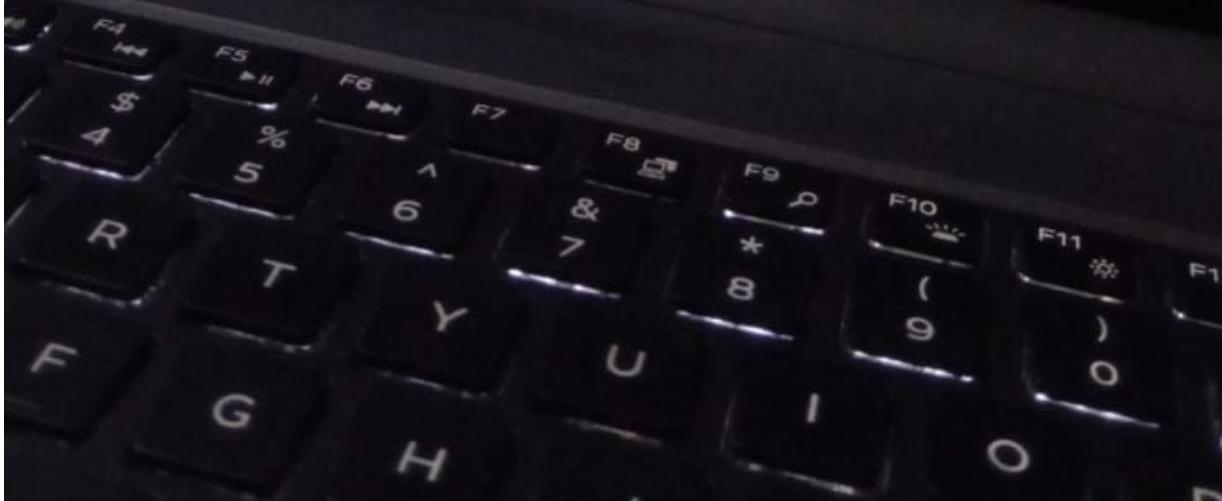

The owner of a company is concerned about security on your network and wants to make sure that no one can identify passwords if they happen to view a configuration on your router. What command will encrypt all passwords on the router?

Select one:

- Router#service password-encryption
- Router#enable secret password
- Router(config)#enable secret password
- Router(config)#service password-encryption

[Next page](#)



CN - Online Test 1 - 24/3/2022 - 8.00pm - 9.00pm



NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

Question 13

Not yet answered

Marked out of 1.0

Flag question

Which command gives the view of recently used commands?

Select one or more:

- show protocol
- set history
- show history
- DO set history
- DO show history
- view history
- DO view history

UP and Down arrow keys  
Show history

[Previous page](#)



# NetExams

Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

it2100

When powering up a router, which of the following types of memory normally stores the start-up configuration?


Select one:

- Flash Memory
- NVRAM
- ROM
- RAM

Next page




search




29°

DELL

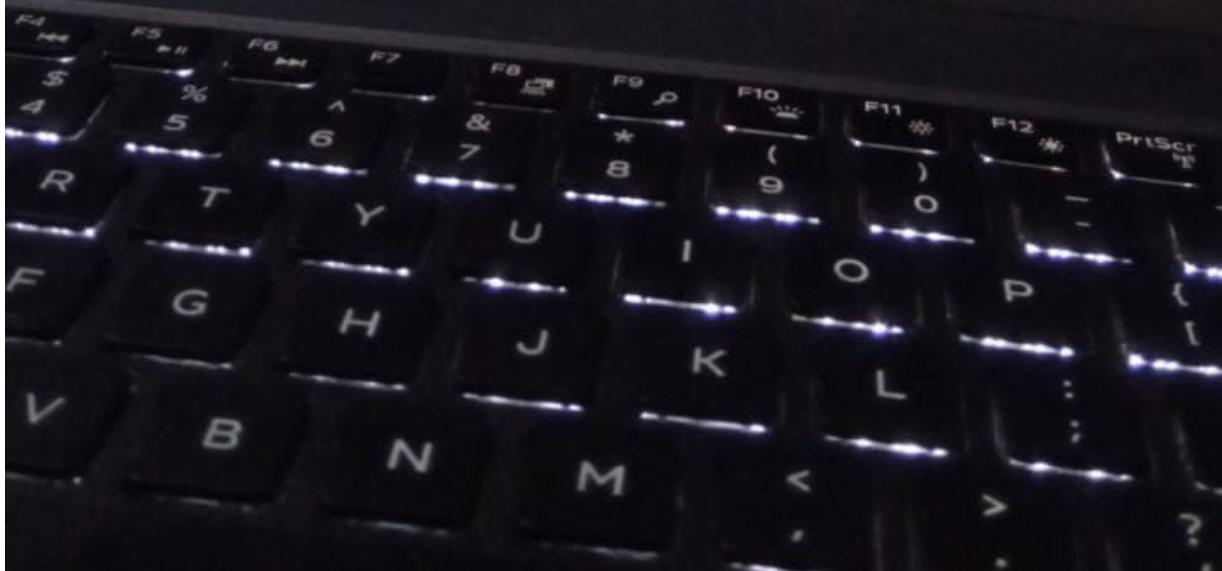

Network addresses of MALABE and METRO LANs are given in the diagram.

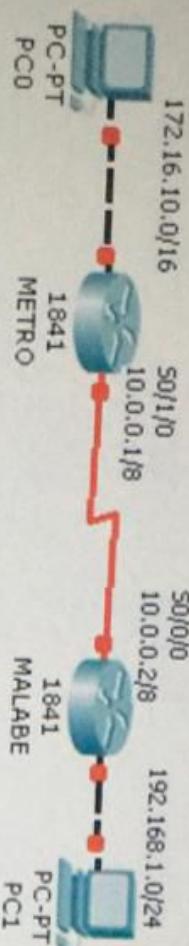

Assume networks are configured with a DHCP server and newly connected computer in MALABE LAN is required to obtain an IP address from this DHCP server. Which of the following can be used as source address?

Select one:

- 10.0.0.2
- 192.168.1.0
- 255.255.255.255 X
- 255.255.255.0
- 0.0.0.0

This host on this network

network ekak aluth device ekak connect weddi device device eke IP address eka initialize wenwa 0.0.0.0  
This host on this network=0.0.0.0(Source address)

works - II X CN - Online Test 1 - 24/3/2022 - X what are the purpose of ICMP - X +

exam.slit.lk/mod/quiz/attempt.php?attempt=371206&cmid=6162&page=14

Maps Google Translate

Sri Lanka Institute of Information Technology

Examinations Lockdown Browser Practice Test IT21041716

Refer to the exhibit: The user at Workstation B reports that Server A cannot be reached. What is preventing Workstation B from reaching Server A?

Hub/Switch Router

Server-A

IP: 192.168.10.123  
Gateway: 192.168.50.100/24

Workstation-B

IP: 172.168.10.1718  
Gateway: 172.168.10.50/16

A B

Select one:

- The IP address for Server A is a broadcast address.
- The gateway for Workstation B is not on the same subnet.
- The gateway for Server A is not on the same subnet.
- The IP address for Workstation B is a subnet address.

DELL

W E R Y U I O P  
S D F G H J K L  
X C V B N M



# NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

Section 6

yet answered

ked out of 1.0

-flag question

Under which circumstance is needed to configure a clock rate on a serial interface?

DTE-Data terminate end  
DCE-Data Collecting end

- Select one:
- When the interface is terminated using the DCE end of the cable.
  - When the interface is terminated with the DTE end of the cable.
  - When the interface is terminated using a loopback adapter.
  - When the interface is terminated using a Category 3 Cable.

Previous page

# NetExam

Sri Lanka Institute of Information Technology

Examinations Lockdown Browser Practice Test

Which of the following commands sets the secret password to Cisco ?

Select one:

- enable secret cisco
- enable secret Cisco
- enable password Cisco
- enable secret password Cisco



etworks - II X CN - Online Test 1 - 24/3/2022 - X what are the purpose of ICMP - X +

etexam.sliit.lk/mod/quiz/attempt.php?attempt=371206&cmid=6162&page=19

I Maps Google Translate

Examinations Lockdown Browser Practice Test

**Command Prompt**

```
PC>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


PC>ping 192.168.1.21
Pinging 192.168.1.21 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.21:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
    No errors detected.

PC>
```

Select one:

- Connectivity : 192.168.1.2      No connectivity : 192.168.1.21
- Connectivity : 192.168.1.0
- Connectivity : 192.168.1.21      No connectivity : 192.168.1.2
- No Connectivity : 192.168.1.0
- Connectivity : 192.168.1.255



orks - IT - X CN - Online Test 1 - 24/3/2022 - X what are the purpose of ICMP - X

xam.sliit.lk/mod/quiz/attempt.php?attempt=371206&cmid=6162&page=16

Maps Google Translate

NetExaunn

Sri Lanka Institute of Information Technology

xaminations


Lockdown Browser

Practice Test

Which one of the following devices is network layer protocol dependent?

Select one:

- Bridge
- Router
- Repeater
- Hub



netexam.sliit.lk/mod/quiz/attempt.php?attempt=371025&cmid=6162&page=17

ail Course: Object Orie... Course: Computer... Course: Database... Course: Operating



Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

Under which circumstance is needed to configure a clock rate on a serial interface

Select one:

- When the interface is terminated using the DCE end of the cable.
- When the interface is terminated with the DTE end of the cable.
- When the interface is terminated using a Category<sup>5</sup> Cable.
- When the interface is terminated using a loopback adapter.

page

**Question 17**

Not yet answered

Marked out of 1.0

 Flag question

Under which circumstance is needed to configure a clock rate on a serial interface?

Select one:

- When the interface is terminated using a Category 3 Cable.
- When the interface is terminated using the DCE end of the cable.
- When the interface is terminated with the DTE end of the cable.
- When the interface is terminated using a loopback adapter.

[Previous page](#)



# NetExam

Sri Lanka Institute of Information Technology

14

Powered

Set of 1.0

Question

- Which type of cable is used to connect to a Cisco Console port?

Select one:

- TIA 568B
- Crossover
- Rollover
- Straight Through

Rollover cable=Console Cable-used to connect PC to console port on a device(router,switch,firewall)


RJ 45 kiyenne Rollover cable ekak

is page

Copper crossover -similar type of devices  
ex-2 switches together,2 PCs together,2 routers

copper straightthrough- different type of devices  
ex-router to PC,Router to switch

here to search



DELL





d

Examinations

Lockdown Browser

Practice Test

1

Answered

of 1.0

Question

What does the following command allow you to perform next?  
RouterA(config)#line vty 0 3

Select one:

- Set the configurations
- Set the console password.
- Set the Telnet password.
- Shut down the router.
- Disable console connections.

Page

here to search



Question 14

Not yet answered

Marked out of 1.0

Flag question

Identify the purpose of ICMP?

Select one or more:

- Send control messages
- Avoiding routing loops.
- Collision detection X
- Send error messages
- Transporting routing updates X

ICMP (Internet Control Message Protocol) is an error-reporting protocol that network devices such as routers use to generate error messages to the source IP address when network problems prevent delivery of IP packets.

Previous page

**Question 16**

Not yet answered

Marked out of 1.0

Flag question

When powering up a router, which of the following types of memory normally stores the start-up configuration?

Select one:

- RAM
- Flash Memory
- ROM
- NVRAM

[Previous page](#)



Dashboard

Examinations

Lockdown Browser

Practice Test

**Question 20**

Not yet answered

Marked out of 1.0

Flag question

Identify the purpose of ICMP?

Select one or more:

- Collision detection
- Send control messages
- Avoiding routing loops.
- Transporting routing updates
- Send error messages.


Previous page



Type here to search



Network addresses of MALABE and METRO LANs are given in the diagram.

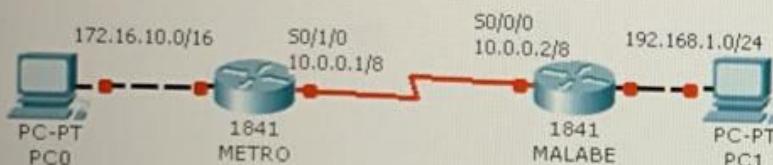

Assume networks are configured with a DHCP server and newly connected computer in MALABE LAN is required to obtain an IP address from this DHCP server. Which of the following can be used as source address?

Select one:

- 192.168.1.0
- 255.255.255.255
- 10.0.0.2
- 255.255.255.0
- 0.0.0.0

Which command gives the view of recently used commands?

Select one or more:

- set history
- view history
- show history
- DO view history
- DO show history
- DO set history
- show protocol





Question 18

Answer saved

Marked out of 1.0

Flag question

Refer the following router output:

Router#show cl

% Ambiguous command: "show cl"

class-map = Show QoS Class Map  
clock = Display the system clock


What is the reason to receive this error message?

Select one:


- There is more than one show command that starts with the letters *cl*
- There is no show command that starts with *cl*
- The command requires additional options or parameters
- The command is being executed from the wrong router mode

Previous page

Type here to search



DELL

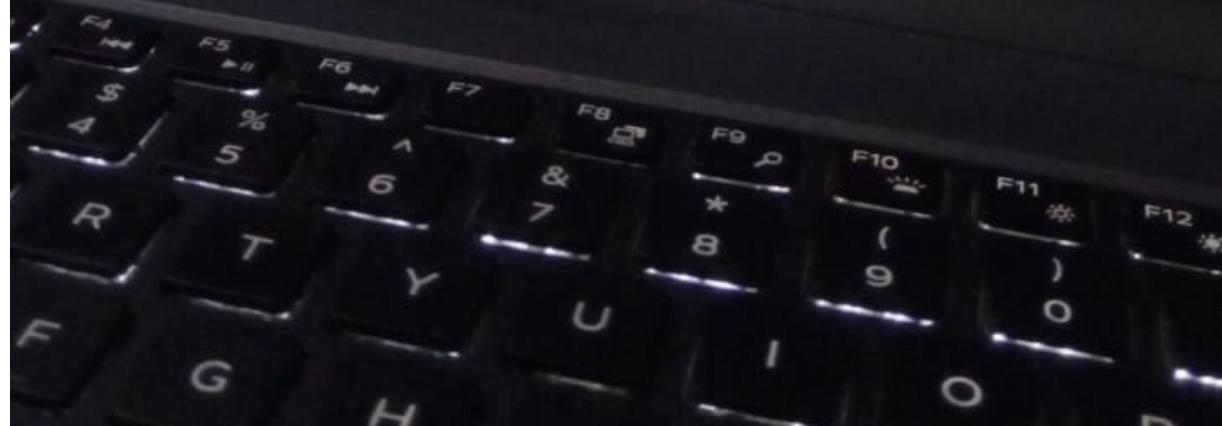

# NetExam

Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

Which one of the following devices is network layer protocol dependent?

Select one:

- Router
- Hub
- Bridge
- Repeater

page



Which of the following memory locations describes the possible locations from which the operating system would be loaded at system initialization?

Select one:

- RAM, ROM
- NVRAM, RAM
- NVRAM, ROM
- Flash Memory, ROM

IOS  
Image

Next page

Finish

Time

1

9

17

25

# NetExam

Sri Lanka Institute of Information Technology

xaminations

Lockdown Browser

Practice Test

The Administrator needs to prevent unauthorized users from plugging their laptops into the router. What type of password will help prevent this issue?

Select one:

- Telnet      router ekai lap ekai dekama ek
- Secret
- Enable
- Console
- Line

red  
1.0  
on

Refer the following router output:

```
Router#show cl  
% Ambiguous command: "show cl"
```

What is the reason to receive this error message?

Select one:

- There is no show command that starts with *cl*
- There is more than one show command that starts with the letters *cl*
- The command requires additional options or parameters
- The command is being executed from the wrong router mode

Under which circumstance is needed to configure a clock rate on a serial interface?

Select one:

- When the interface is terminated using the DCE end of the cable.
- When the interface is terminated using a Category 3 Cable.
- When the interface is terminated using a loopback adapter.
- When the interface is terminated with the DTE end of the cable.

[Next page](#)

Safari File Edit View History Bookmarks Window Help

CN - Online Test 1 - 24/3/2022 - 8.00pm - 9.00pm Course: Computer

 NetExam  
Sri Lanka Institute of Information Technology

Dashboard Examinations Lockdown Browser Practice Test

Question 1  
Not yet answered  
Marked out of 1.0  
Flag question


Which two statements describe the IP address 10.16.3.65/23?

1. The subnet address is 10.16.3.0
2. The lowest host address in the subnet is 10.16.2.1
3. The last valid host address in the subnet is 10.16.2.254
4. The broadcast address of the subnet is 10.16.3.255

Select one:

1 and 3  
 2 and 4  
 2 and 3  
 1 and 4

10.16.00000011.01000001

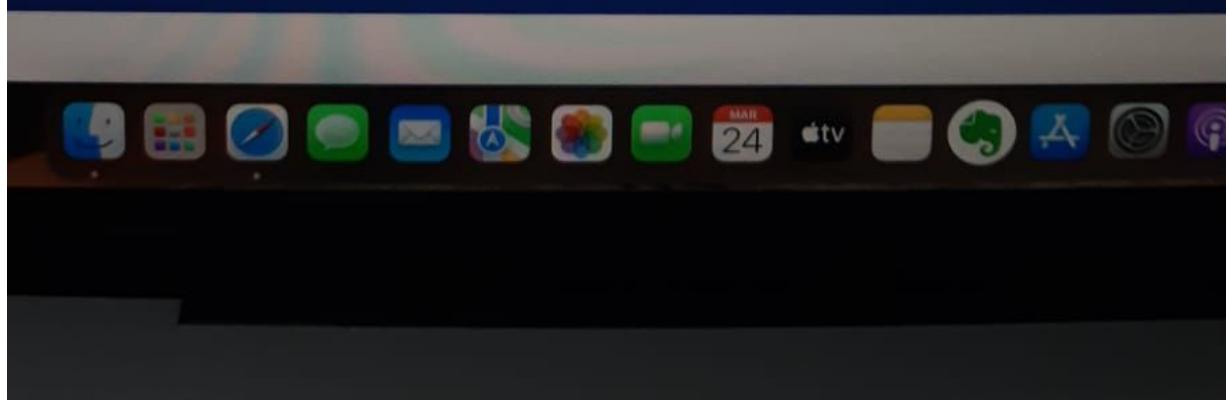



Dashboard

Examinations

Lockdown Browser

Practice Test

Question 11

Not yet answered

Marked out of 1.0

Flag question

Where does the running configuration file of the router be stored?

Select one:

- ROM
- RAM
- Flash Memory
- NVRAM
- ROM or RAM



[Previous page](#)



# NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

Question 19

Not yet answered

Marked out of 1.0


Flag question

Select one:

- Enable
- Telnet
- Secret
- Console
- Line

Previous page

Type here to search



The Administrator needs to prevent unauthorized users from plugging their laptops into the router. What type of password will help prevent this issue?

Select one:

- Line
- Enable
- Telnet
- Secret
- Console



# NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

Question 17

Not yet answered

Marked out of 1.0

Flag question

Which memory type holds the full IOS image for the router?


Select one:

- Flash Memory
- ROM
- NVRAM
- RAM

Previous page



Type here to search

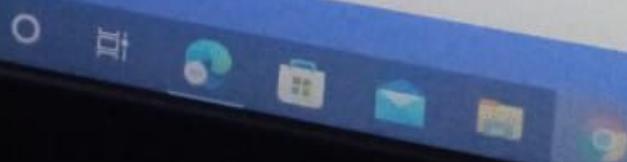



Dashboard

Examinations

Lockdown Browser

Practice Test

Question 3

Not yet answered

Marked out of 1.0

Flag question

Which memory type holds the full IOS image for the router?

Select one:

- RAM
- ROM
- Flash Memory
- NVRAM

Previous page

Safari File Edit View History Bookmarks Window Help

netexam.sliit.lk

CN - Online Test 1 - 24/3/2022 - 8.00pm - 9.00pm

 NetExam  
Sri Lanka Institute of Information Technology

Dashboard Examinations Lockdown Browser Practice Test


Question 10  
Not yet answered  
Marked out of 1.0  
 Flag question

In which of the following modes in Cisco's IOS can issue show commands normally ?

Select one or more:

Administrative  
 Privileged  
 Line Configuration  
 Global Configuration  
 User  
 Interface Configuration

Previous page



# NetExamination

Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

You need to issue the command show startup-config from the relevant mode. How to identify that you are in that mode?

Select one:

- %
- >
- \$
- #

Examinations

Lockdown Browser

Practice Test

```
PC>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255
Reply from 192.168.1.2: bytes=32 time=0ms TTL=255
Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>ping 192.168.1.21
Pinging 192.168.1.21 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.21:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>
```

Select one:

- Connectivity : 192.168.1.255
- Connectivity : 192.168.1.2      No connectivity : 192.168.1.21
- Connectivity : 192.168.1.0
- No Connectivity : 192.168.1.0
- Connectivity : 192.168.1.21      No connectivity : 192.168.1.2

re to search



**Question 12**

Not yet answered

Marked out of 1.0

Flag question

Which type of cable is used to connect to a Cisco Console port?

Select one:

- TIA 568B
- Rollover
- Straight Through
- Crossover

1  
Answered  
out of 1.0  
Question

You have typed the command **clock** on a Cisco router and pressed enter/return you received the response as follows:  
% Incomplete command.

clock ?

How can you receive help on this command?

Select one:

- Re enter the command followed by a question mark to view key words
- Type "help" followed by the command to see the command parameter
- Type "history" to review the prompt before the error
- Enter a question mark to display all console commands

You type the following command into the router and receive the following:

```
Router(config)#show serial 0/0
```

^

```
% Invalid input detected at '^' marker.
```

**router#show interface serial 0/0**

Why was this error message displayed?

Select one or more:

- Administrator only can issue this command
- You need to be in privileged mode
- Part of the command is missing
- You cannot have a space between serial and 0/0
- The router does not have a serial0/0 interface

Dashboard

Examinations

Lockdown Browser

Practice Test

it21049668

**Question 4**

Not yet answered

Marked out of 1.0

 Flag question

The Administrator needs to prevent unauthorized users from plugging their laptops into the router. What type of password will help prevent this issue?

Select one:

- Console
- Line
- Telnet
- Enable
- Secret

 Previous pageNext page 



## Question 6

Answer saved

Marked out of 1.0

Flag question

In what location does a Cisco Router and/or Switch store its startup-configuration?

Select one:

- NVRAM
- Memory
- Disk
- Flash

[Previous page](#)[Next page](#)



**Which of the following commands sets the secret password to Cisco?**

- A. *enable secret password Cisco*
- B. *enable secret cisco*
- C. *enable secret Cisco*
- D. *enable password Cisco*

**Answer: Option C**

**Solution(By Examveda Team)**

The enable secret password is case sensitive, so the second option is wrong. To set the *enable secret <password>*, use the *enable secret <password>* command from global configuration mode.



NetExam

Sri Lanka Institute of Information Technology

Board

Examinations

Lockdown Browser

Practice Test

on 11

answered

out of 1.0

g question


Where does a Router store routing tables, ARP cache, and packet buffers ?

Select one:

- Flash Memory
- RAM
- NVRAM
- ROM

vious page

Type here to search



DELL





## Question 16

Not yet answered

Marked out of 1.0

[Flag question](#)

You type the following command into the router and receive the following:

```
Router(config)#show serial 0/0
```

A

% Invalid input detected at '^' marker.

Why was this error message displayed?

Select one or more:

- Part of the command is missing
- You cannot have a space between serial and 0/0
- Administrator only can issue this command
- You need to be in privileged mode
- The router does not have a serial0/0 interface

[Previous page](#) Type here to search

DELL



# NetExam

Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test



Consider classful addressing and choose the broadcast address of 25.10.100.200.

Select one:

- 25.255.255.255
- 25.255.254.255
- 25.10.100.255
- 25.0.0.0

page

here to search

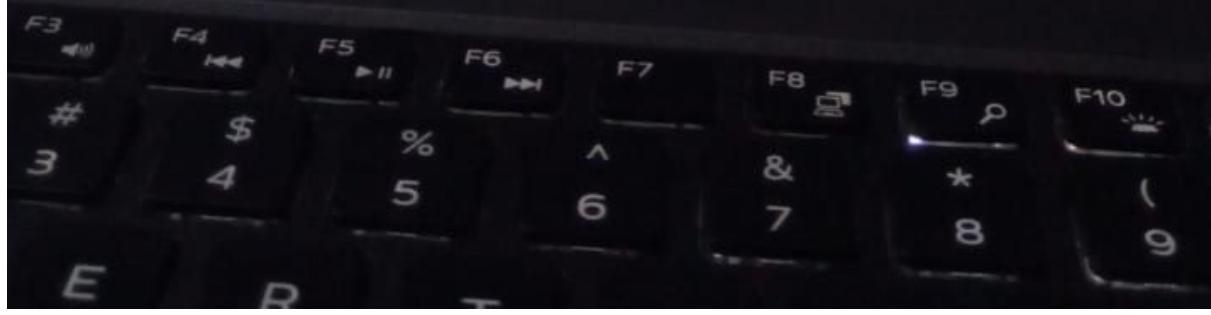

## Identify the purpose of ICMP?

Select one or more:

- Avoiding routing loops.
- Transporting routing updates
- Collision detection
- Send control messages
- Send error messages



You have typed the command **clock** on a Cisco router and pressed enter/return you received the response as follows:  
% Incomplete command.

How can you receive help on this command?

Select one:

- Type "history" to review the prompt before the error
- Enter a question mark to display all console commands  

- Type "help" followed by the command to see the command parameter
- Re enter the command followed by a question mark to view key words



## Question 2

Not yet answered


Marked out of 1.0

Flag question

Which of the following commands sets the secret password to Cisco ?

Select one:

- enable secret Cisco
- enable password Cisco
- enable secret cisco
- enable secret password Cisco

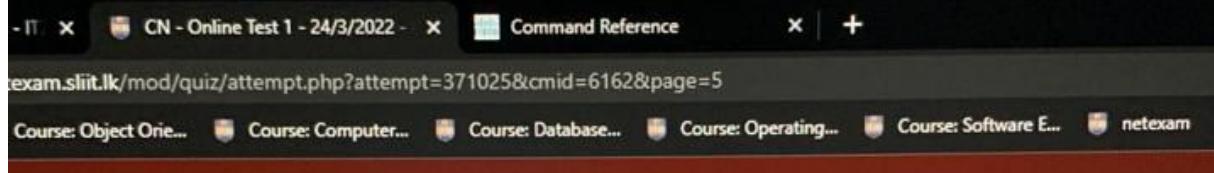

**NetExam**

Lanka Institute of Information Technology

aminations Lockdown Browser Practice Test

You need to issue the command show startup-config from the relevant mode. How to identify that you are in that mode?

Select one:

- %
- >
- #
- \$



NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

it21049668 Sheh

**Question 2**

Not yet answered

Marked out of 1.0

 Flag question

A router has a valid operating system and a configuration stored in NVRAM. When the router boots up, which mode will display ?

Select one:

- global configuration mode
- user EXEC mode
- setup mode
- ROM monitor mode

[Previous page](#)[Next page](#)

**Question 1**

Not yet answered

Marked out of 1.0


 Flag question

Which two statements describe the IP address 10.16.3.65/23?

1. The subnet address is 10.16.3.0
2. The lowest host address in the subnet is 10.16.2.1
3. The last valid host address in the subnet is 10.16.2.254
4. The broadcast address of the subnet is 10.16.3.255

Select one:

- 1 and 4
- 1 and 3
- 2 and 4
- 2 and 3

 A handwritten mark consisting of two red loops, one on top of the other, centered between the question text and the radio button list.

## FreeCram



Refer to the exhibit. The user at Workstation B reports that Server A cannot be reached.

What is preventing Workstation B from reaching Server A?

131. 1 . . 123. 000

131. 1. 123. 66



Workstation B

IP: 131.1.123.43/27  
GW: 131.1.123.33

- A. The IP address for Workstation B is a subnet address.
- B. The gateway for Server A is not on the same subnet.
- C. The IP address for Server A is a broadcast address.
- D. The gateway for Workstation B is not on the same subnet.



Hide answers/explanations

Gateway  
address  
eka  
LAN  
eke  
subnet  
ekema  
tiynne  
oni



Question 1

Not yet answered

Marked out of 1.0

Flag question

In which of the following modes in Cisco's IOS can issue show commands **normally**?

Select one or more:

- Interface Configuration
- Privileged**
- Line Configuration
- Global Configuration
- User**
- Administrative

[Next page](#)

CN - Online Test 1 - 24/3/2022

netexam.sliit.lk/mod/quiz/attempt.php?attempt=371075&cmid=6162

**NetExam**  
Sri Lanka Institute of Information Technology

Dashboard Examinations Lockdown Browser Practice Test

it21006098 Wije

Question 1  
Answers saved  
Marked out of 1.0  
Flag question

Which of the following memory locations describes the possible locations from which the operating system would be loaded at system initialization?

Select one:

Flash Memory, ROM

NVRAM, RAM

NVRAM, ROM

RAM, ROM

Next page

Type here to search

29

22

29°C Mostly clear

DELL

The image shows a Dell laptop keyboard with a question displayed on the screen above it. The question is about memory locations for an operating system. The correct answer, "NVRAM, RAM", is selected and highlighted with a red underline. The background shows a window titled "NetExam" from the Sri Lanka Institute of Information Technology, and the taskbar indicates the weather is 29°C with mostly clear skies.



# NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

it21006098 Wijesinghe W.M.C.I it21006098

Question 3

Not yet answered

Marked out of 1.0

Flag question

The owner of a company is concerned about security on your network and wants to make sure that no one can identify passwords if they happen to view a configuration on your router. What command will encrypt all passwords on the router?

Select one:

- Router#service password-encryption
- Router(config)#enable secret password
- Router#enable secret password
- Router(config)#service password-encryption

≡ Quiz navigation

Finish attempt ...

Time left 0:53:44

1	2	3	4	5
8	9	10	11	12
15	16	17	18	19
22	23	24	25	26
29	30	31		

Previous page

Next page

**NetExam**  
Sri Lanka Institute of Information Technology

Card Examinations Lockdown Browser Practice Test

8 answered out of 1.0 question

You type the following command into the router and receive the following:

```
Router(config)#show serial 0/0
^
% Invalid input detected at '^' marker.
```

Why was this error message displayed?

Select one or more:

- Part of the command is missing
- You cannot have a space between serial and 0/0
- Administrator only can issue this command
- The router does not have a serial0/0 interface
- You need to be in privileged mode

Previous page



Where does the running configuration file of the router be stored?


Select one:

- Flash Memory
- RAM
- NVRAM
- ROM or RAM
- ROM

page



here to search



DELL

# NetExam

Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

Refer the following router output:

```
Router#show cl  
% Ambiguous command: "show cl"
```

What is the reason to receive this error message?

Select one:

- There is more than one show command that starts with the letters *cl*
- The command is being executed from the wrong router mode
- There is no show command that starts with *cl*
- The command requires additional options or parameters



NetExam

Sri Lanka Institute of Information Technology

Dashboard

Examinations

Lockdown Browser

Practice Test

it21049668 She

**Question 3**

Not yet answered

Marked out of 1.0

Flag question

**Under which circumstance is needed to configure a clock rate on a serial interface?**

Select one:

- When the interface is terminated using a loopback adapter.
- When the interface is terminated using a Category 3 Cable.
- When the interface is terminated using the DCE end of the cable.
- When the interface is terminated with the DTE end of the cable.

[Previous page](#)[Next page](#)



Dashboard

Examinations

Lockdown Browser

Practice Test

it21041716 Sandaruwan.W.S.R it21041716


2037

Question 23

Not yet answered  
Marked out of 1.0

Flag question

Refer to the router topology shown in the diagram. Assuming that all routers are running RIP, which statements describe how the routers exchange their routing tables?

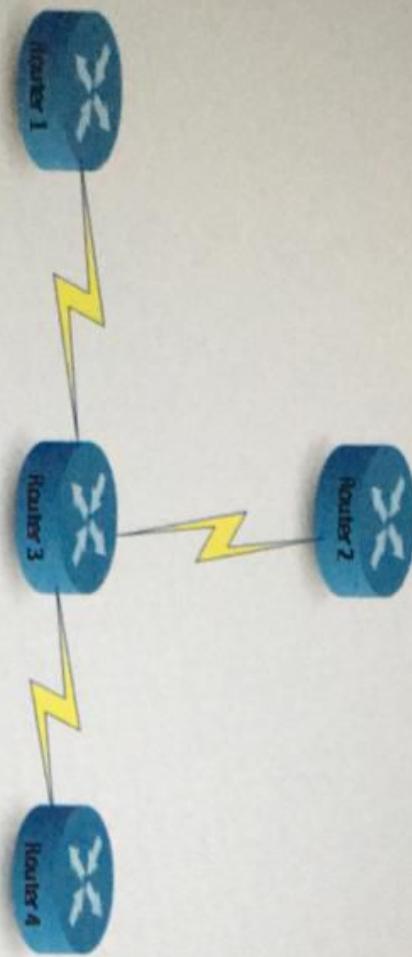

Select one:

- A. Router 1 exchanges with Router 3
- B. Router 1 exchanges with Router 4
- C. Router 1 exchanges with Router 2

Finish attempt...

Time left 0:30:02

1	2	3	4	5	6	7
9	10	11	12	13	14	15
17	18	19	20	21	22	23
25	26	27	28	29	30	31

≡ Quiz navigation

# Sri Lanka Institute of Information Technology

Examinations

Lockdown Browser

Practice Test

Consider classful addressing and choose the broadcast address of 25.10.100.200.

Select one:

- 25.10.100.255
- 25.0.0.0
- 25.255.254.255
- 25.255.255.255

