

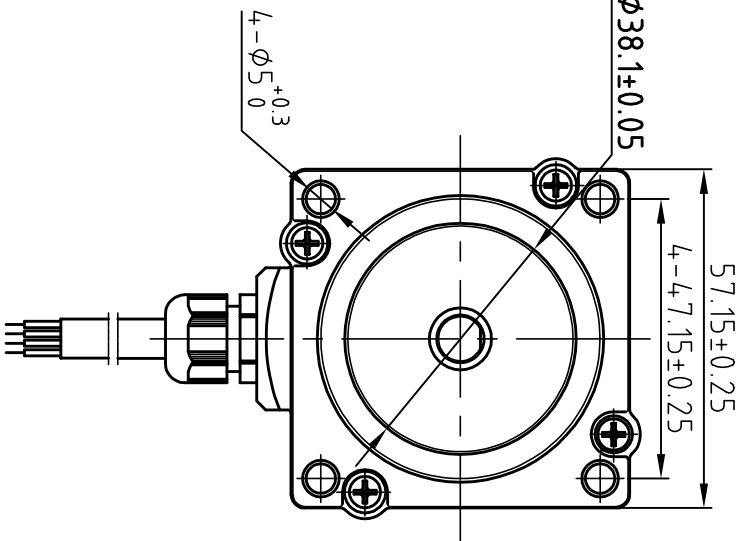


Dimension: (Unit: mm)

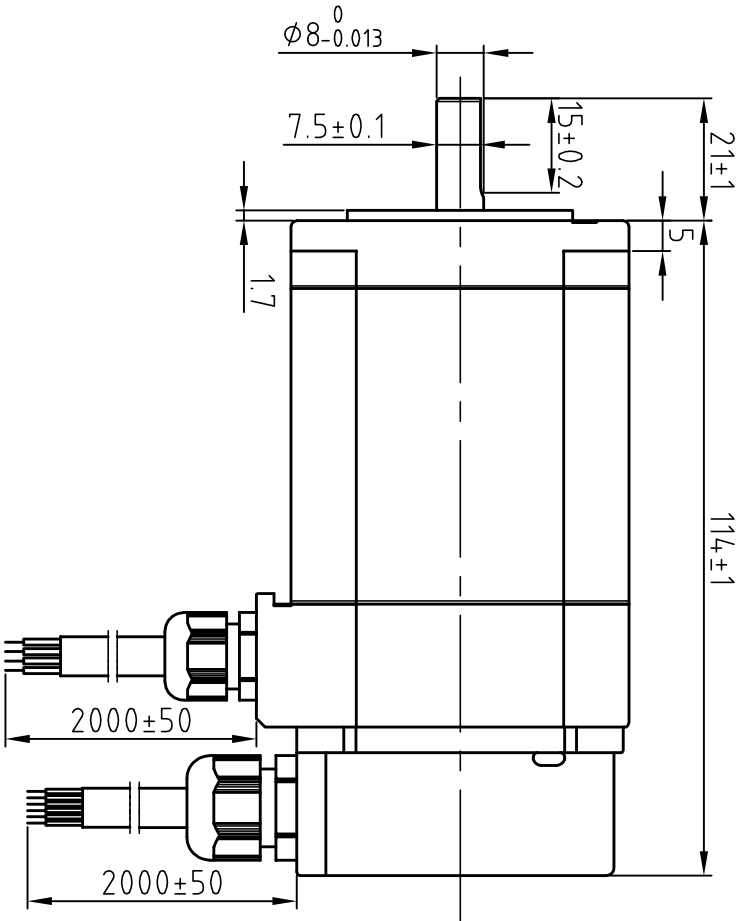

Motor Connections:

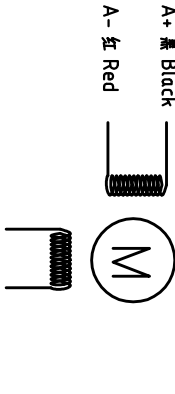

Encoder Signals

颜色	黄	绿	蓝	紫	红	白
定义	B+	B-	A+	A-	VCC	GND

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Protection Level	IP65
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 450g)
Axial play	Max:0.08mm(load 900g)

Motor Specification:

Current/phase	4.0 A
Voltage	2.72 V
DC Resistance/phase ±10%	0.68 Ω
Inductance/phase ±20%	2.0 mH
Holding torque	2.0 N·M
Inertia	0.48 kg·cm <sup>2</sup>
Weight	1.2 kg
Encoder Resolution	1000 cpr

设计	王洪松	日期	2017.10.30	材料	深圳市雷赛智能控制股份有限公司
审核	黄捷连	2017.10.30	第一角画法	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
批准	黄捷连	2017.10.30	版本/版次	比例 Scale	57CME23-FS MS11
图号	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号
Part No.	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	Part No.