




Dimension: (Unit: mm)

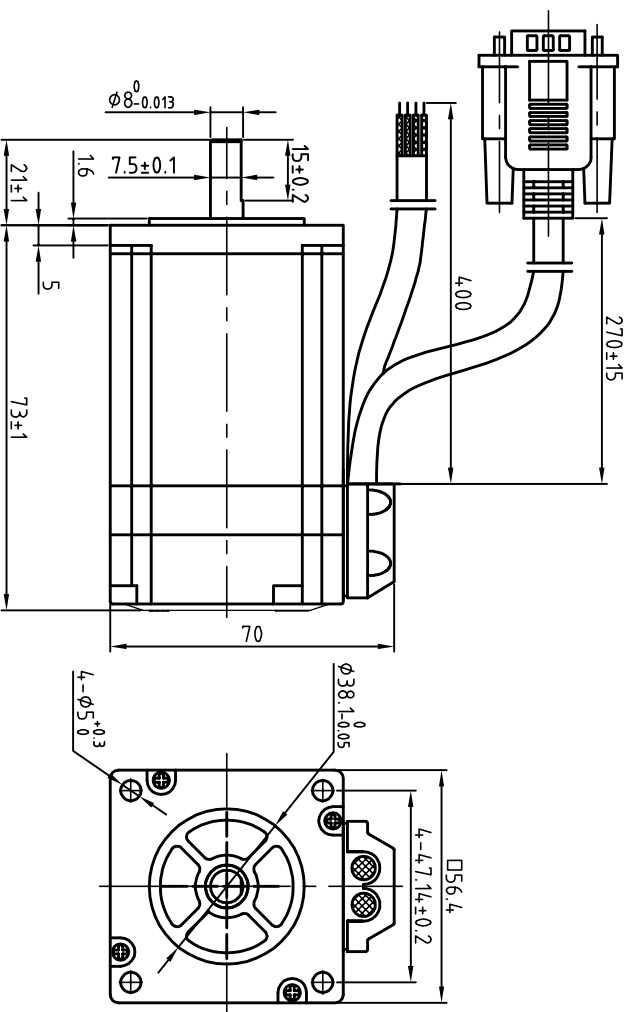

Motor Connections:



Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	3.2 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.55 Ω
Inductance/phase ±20%	2.1mH
Holding torque	1.2 N·M
Inertia	0.3 kg·cm ²
Weight	
Encoder resolution	1000 cpr

设计	王瑞和	日期	2019.1.8	材料	深圳市雷赛智能控制股份有限公司
审核	黄雄波	2019.1.8		第一角画法	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准	黄雄波	2019.1.8		First Angle projection	混合伺服电机
图号	LS-MT-01-07A	图号	LS-57CME12C MS30	比例尺	57CME12C MS30
图号	LS-MT-01-07A	图号	LS-57CME12C MS30	比例尺	57CME12C MS30