

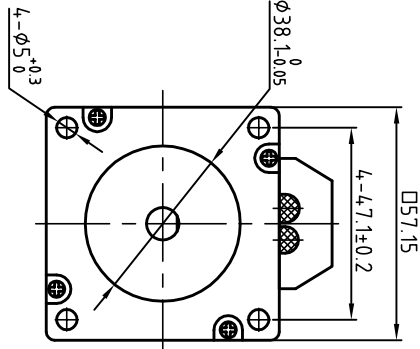



Dimension: (Unit: mm)

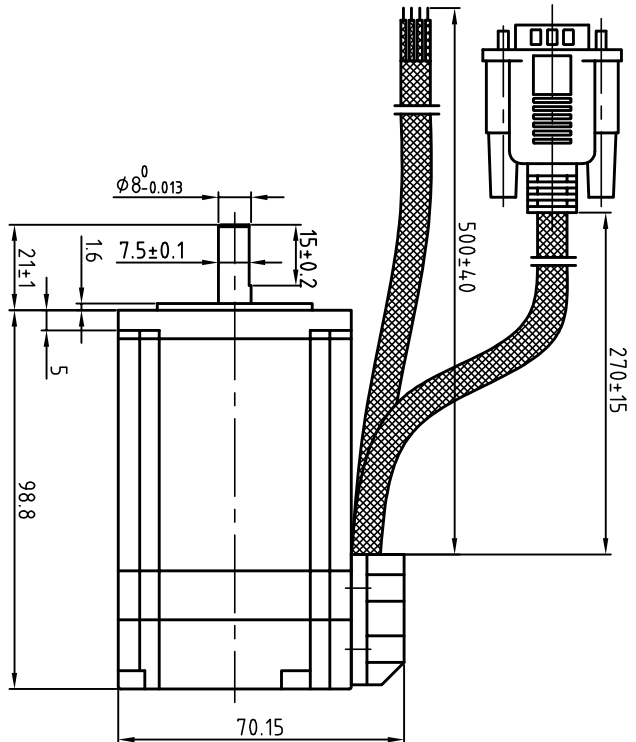

Motor Connetions:

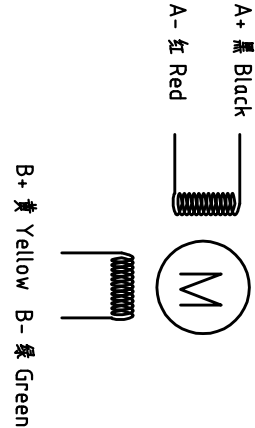

Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	24 V
DC Resistance/phase ±10%	0.4 Ω
Inductance/phase ±20%	1.7 mH
Holding torque	2.0 N·M
Inertia	0.4 kg·cm <sup>2</sup>
Weight	1.2 kg
Encoder resolution	1000 cpr

设计	王洪松	日期	2021.07.02	材料	深圳市雷赛智能控制股份有限公司
审核	黄捷建	2021.07.02	第一角画法	First Angle projection	深圳市雷赛智能控制股份有限公司
批准	黄捷建	2021.07.02	版本/版次	A/01	混合伺服电机
图号	LS-MT-01-07A	共 1 套 第 1 套	图号	LS-57CME21X	57CME21X