




Dimension: (Unit: mm)

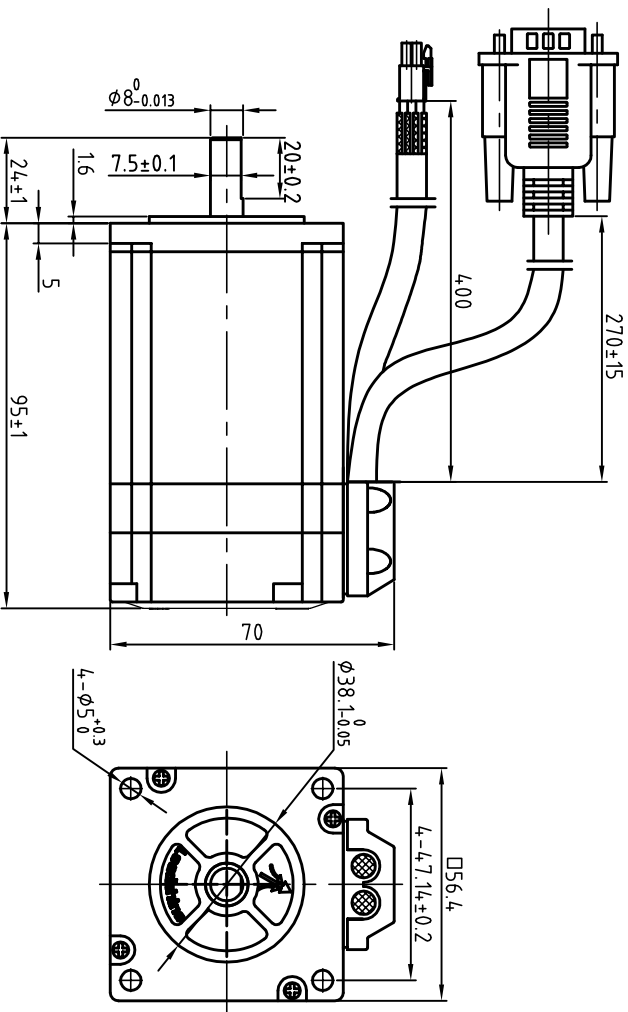

Motor Connctions

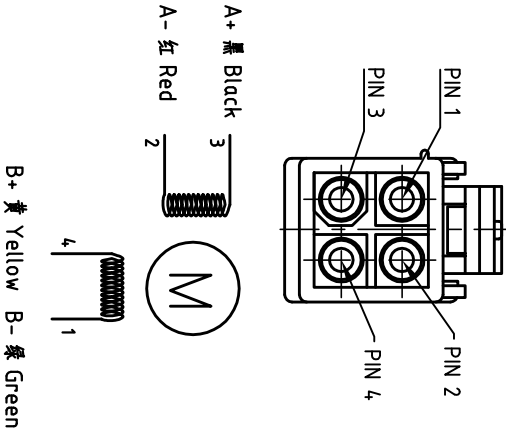

Encoder Signals

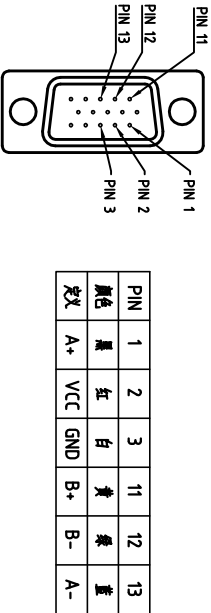

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	19 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.75mH
Holding torque	2.3 N·M
Inertia	0.48 kg·cm ²
Weight	
Encoder resolution	1000 cpr

设计	王瑞松	日期	19.9.12	材料	深圳市雷赛智能控制股份有限公司
审核	袁雄章	19.9.12		第一角画法	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准	袁雄章	19.9.12		版本/版次	混合伺服电机
图号	LS-MT-01-07A	共 1 套	第 1 套	比例 Scale	57CME23-JS MS30
图号	LS-MT-01-07A	共 1 套	第 1 套	比例 Scale	57CME23-JS MS30
图号	LS-MT-01-07A	共 1 套	第 1 套	比例 Scale	57CME23-JS MS30