




Dimension: (Unit: mm)

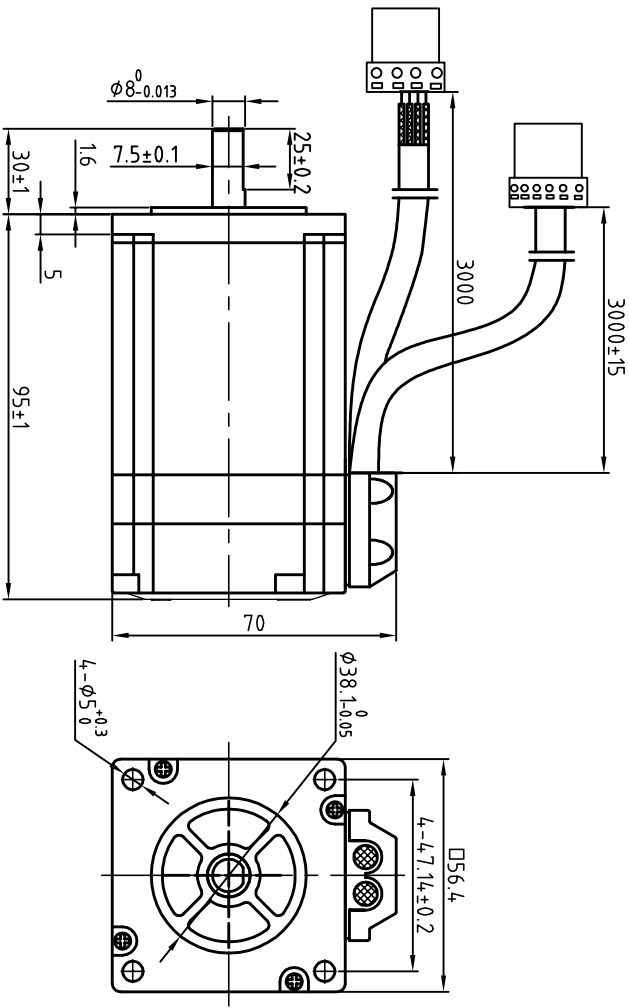

### Motor Connctions

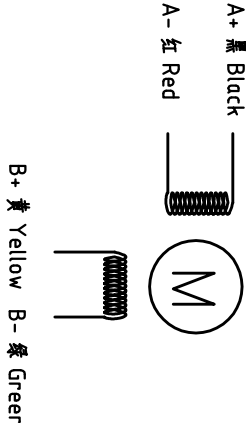

### Motor Connctions: 4PIN和6PIN的3.81端子

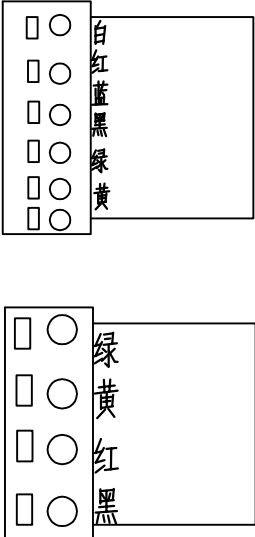

### Common Rating

|                       |                        |
|-----------------------|------------------------|
| Step angle            | 1.8°                   |
| Position accuracy     | 1.8±0.09°              |
| Dielectric strength   | 500VAC 1min            |
| Insulation resistance | 100MΩm(500VDC)         |
| Insulation class      | B                      |
| Temp rise(Max)        | 80K                    |
| Radial play           | Max.0.02mm(Load 4.50g) |
| Axial play            | Max.0.08mm(Load 900g)  |

### Specification:

|                          |                         |
|--------------------------|-------------------------|
| Current/phase            | 5.0 A                   |
| Voltage                  | 1.9 V                   |
| DC Resistance/phase ±10% | 0.38 Ω                  |
| Inductance/phase ±20%    | 1.75mH                  |
| Holding torque           | 2.3 N·M                 |
| Inertia                  | 0.48 kg·cm <sup>2</sup> |
| Weight                   |                         |
| Encoder resolution       | 1000 cpr                |

|    |              |             |              |                        |                        |
|----|--------------|-------------|--------------|------------------------|------------------------|
| 设计 | 王瑞和          | 日期          | 2019.8.9     | 材料                     | 深圳市雷赛智能控制股份有限公司        |
| 审核 | 黄桂章          | 2019.8.9    | 第一角画法        | First Angle projection | 混合伺服电机                 |
| 批准 | 黄桂章          | 2019.8.9    | 版本/版次        | A/01                   | 57CME22C-PY-3M MS30    |
| 图号 | LS-MT-01-07A | 共 1 页 第 1 页 | Sheet 1 of 1 | 图号                     | LS-57CME22C-PY-3M MS30 |