

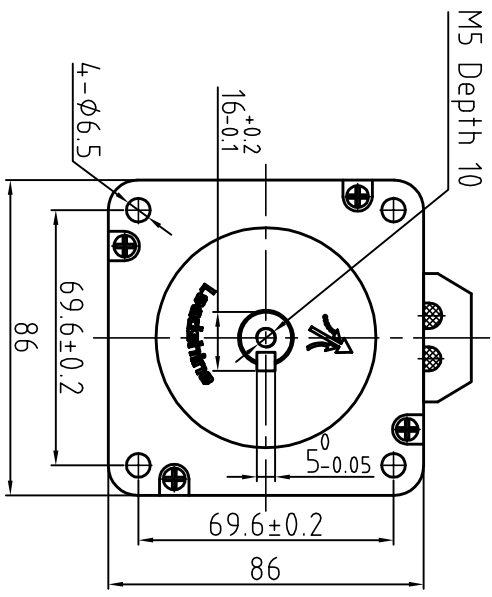



Dimension: (Unit: mm)

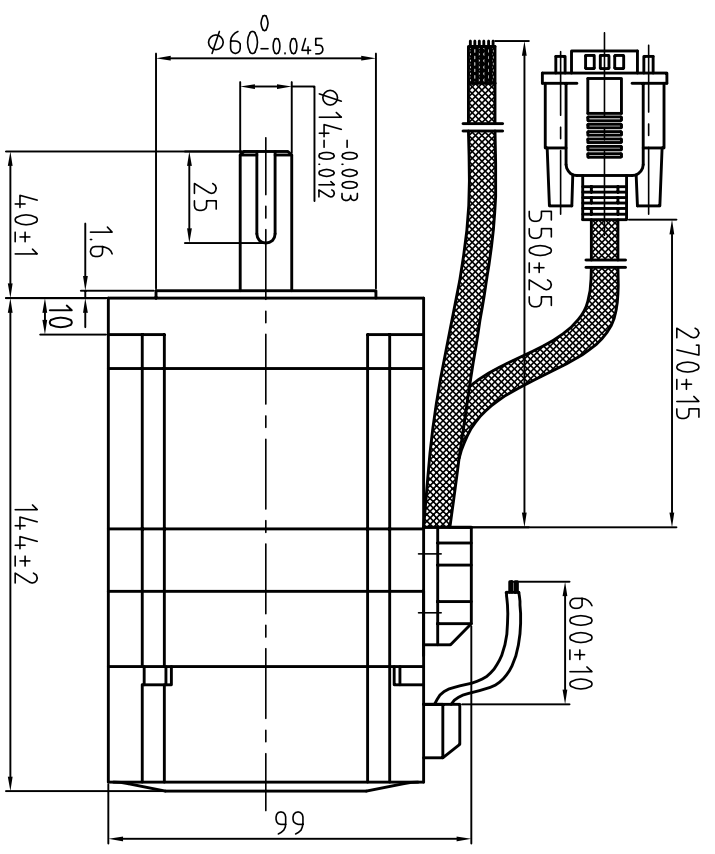


Motor Connetions

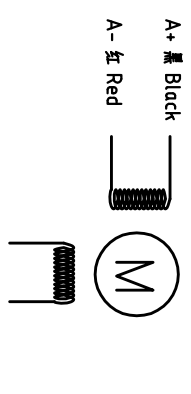

Brake Connetions

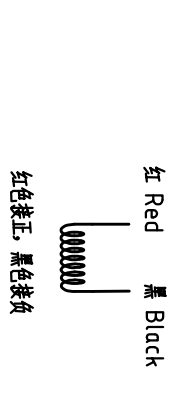

Encoder Signals



Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Common Rating

Specification

Current/phase	4.0 A
Voltage	2 V
DC Resistance/phase	±10% 0.47 Ω
Inductance/phase	±20% 3.6 mH
Holding torque	4 N·M
Inertia	1.95 kg·cm²
Weight	2.7 kg
Encoder Resolution	1000 cpr

Brake Specification

Voltage	24Vdc
Friction torque	6N·M

设计	杨阳	日期	2021.07.01	材料	深圳市雷赛智能控制股份有限公司
审核	王涛松	2021.07.01	第一角画法	比例	86CME4.5-BZ MS30
批准	黄捷建	2021.07.01	版本/版次	比例	86CME4.5-BZ MS30
零件图	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号
零件图	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号