



Dimension: (Unit: mm)

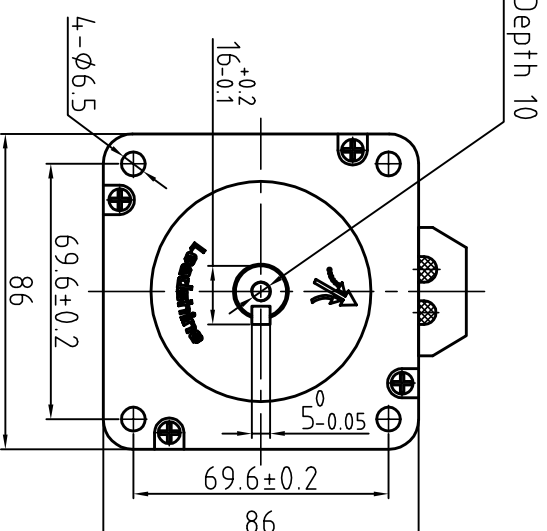


### Motor Connctions

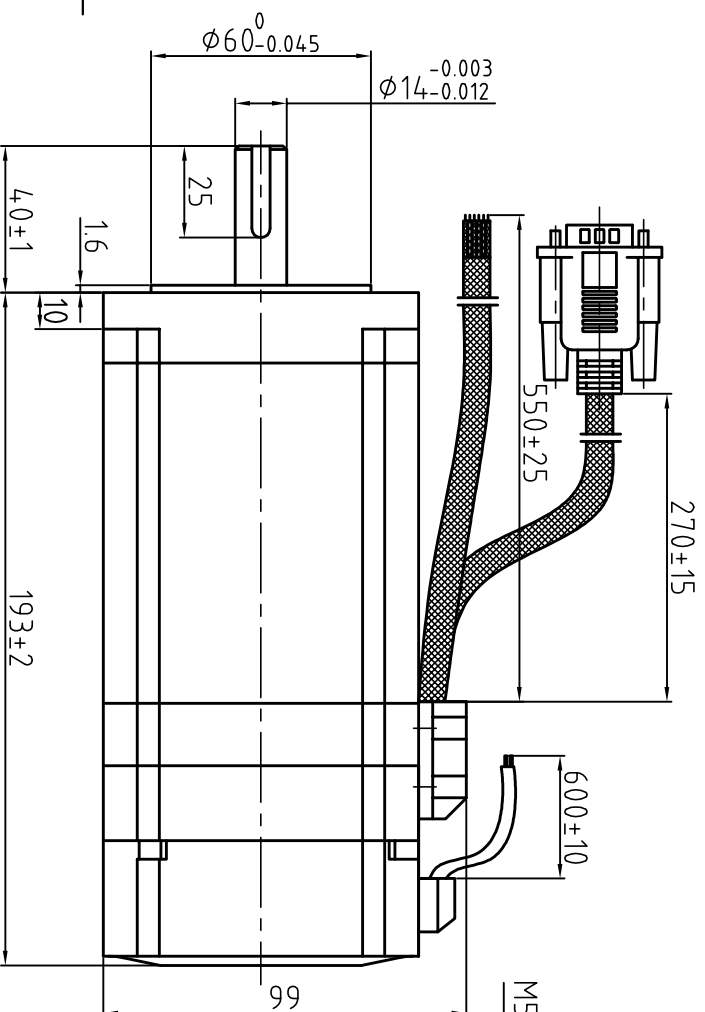

### Brake Connctions



### Encoder Signals



### Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

### Specification

Current/phase	6 A
Voltage	5 V
DC Resistance/phase	±10% 0.7 Ω
Inductance/phase	±20% 6 mH
Holding torque	12 N·M
Inertia	3 kg·cm <sup>2</sup>
Weight	5.4 kg
Encoder Resolution	1000 cpr

### Brake Specification

Voltage	24Vdc
Friction torque	6N·M

设计	杨阳	日期	2021.07.01	材料	深圳市雷赛智能控制股份有限公司
审核	王洪松	日期	2021.07.01	第一角画法	SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准	黄建建	日期	2021.07.01	版本/版次	86CME120-BZ MS30
零件号	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号
零件号	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号
零件号	LS-MT-01-07A	共 1 套	第 1 套	Sheet 1 of 1	图号