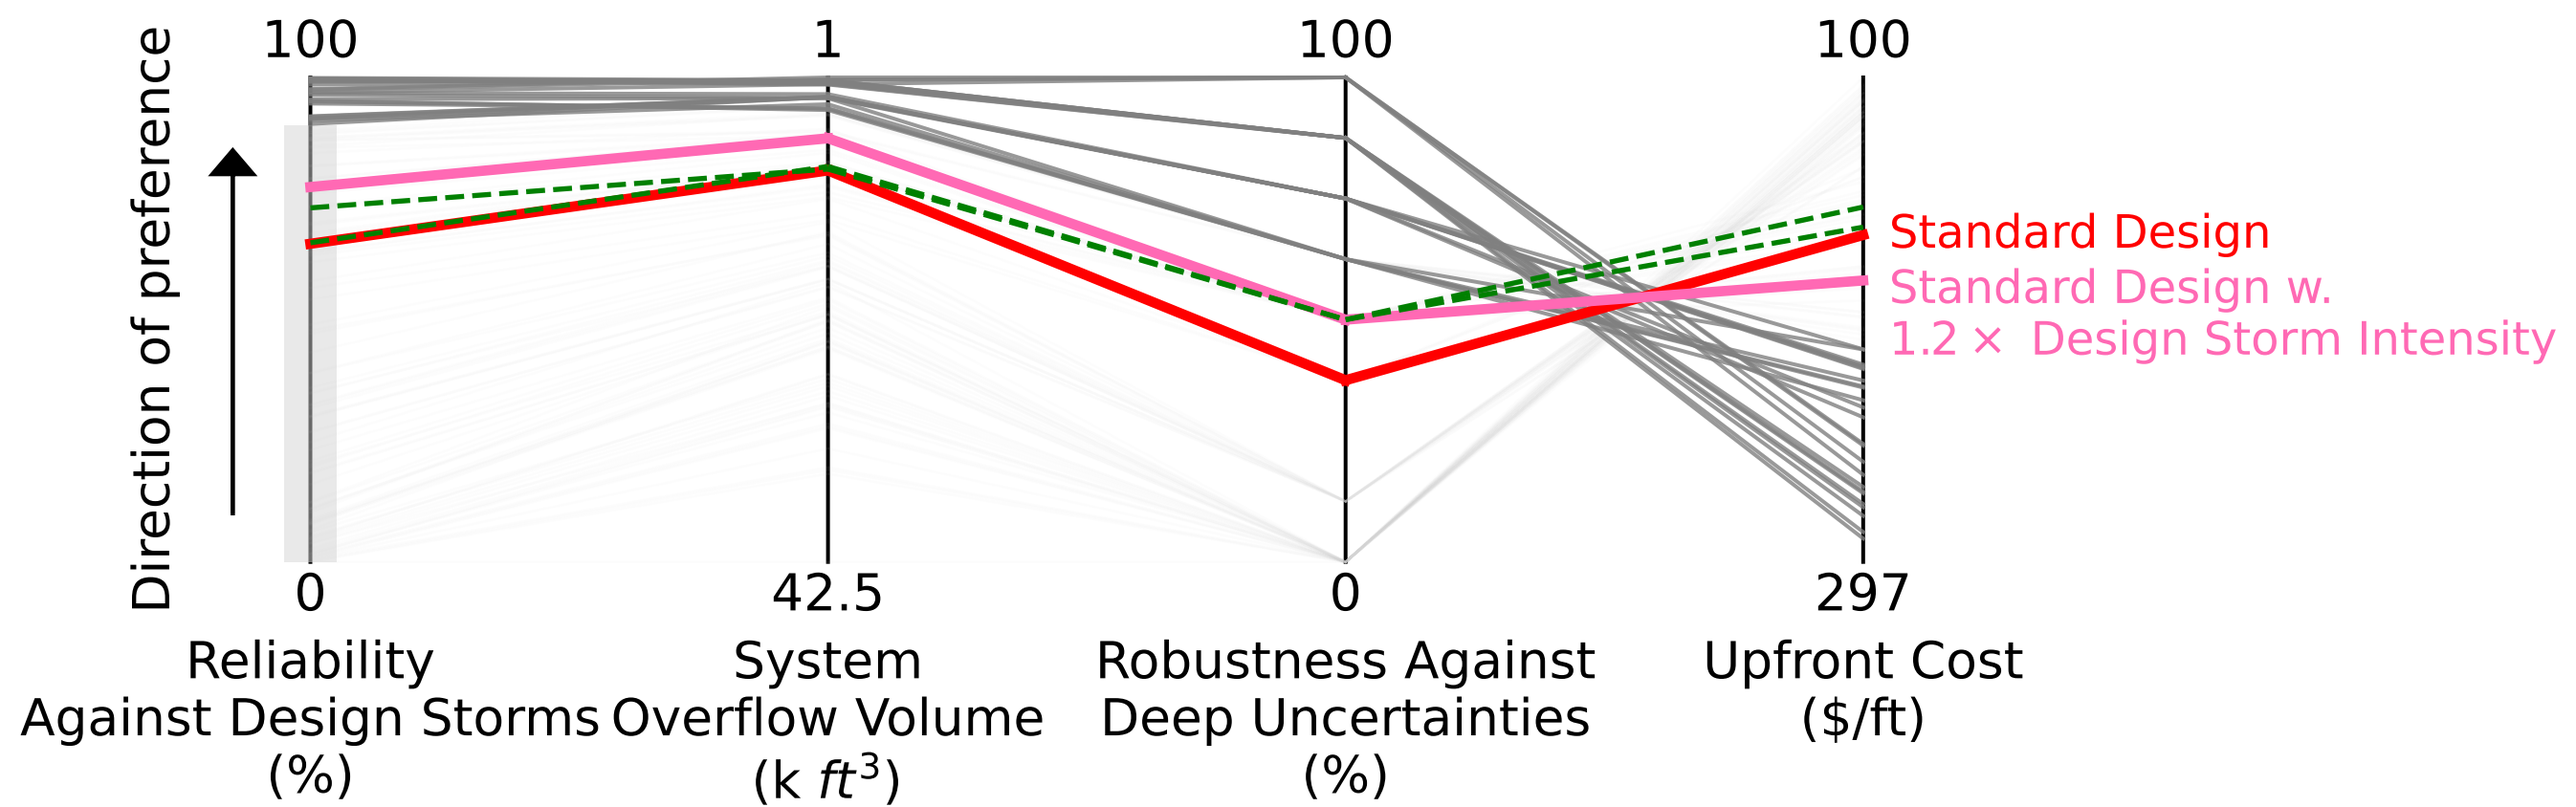
100
1
100
100
Direction of preference
Standard Design
Standard Design w.
1.2 × Design Storm Intensity
0
42.5
0
297
Reliability
Against Design Storms
(%)
System
Overflow Volume
(k ft^3)
Robustness Against
Deep Uncertainties
(%)
Upfront Cost
($/ft)
Satisfying designs with reliability >= 90%
Non satisfying designs
Pareto-improving example designs