

TECHNICAL BULLETIN

DIXIE CHEMICAL


10601 Bay Area Blvd.
Pasadena, TX 77507
Tel: (281) 474-3271
Fax: (281) 291-3384
E-Mail: info@dixiechemical.com

Monoacryloxy Hexahydrophthalate (MAHP) CAS RN 57043-35-3

Properties

Property	Values	Test Method
Color, Gardner	2 MAX	D-150G
Acid Value mg KOH/G	195-215	D-195C
EGDA, %	0.4 MAX	D-196A
HHPA, %	3.0 MAX	D-196A
MAHP, %	91 MIN	D-196A
Residual HEA, %	1.5 MAX	D-196A
Viscosity (Brookfield, cps @ 25°C)	5000 - 7100	D-237A

Viscosity as a Function of Temperature

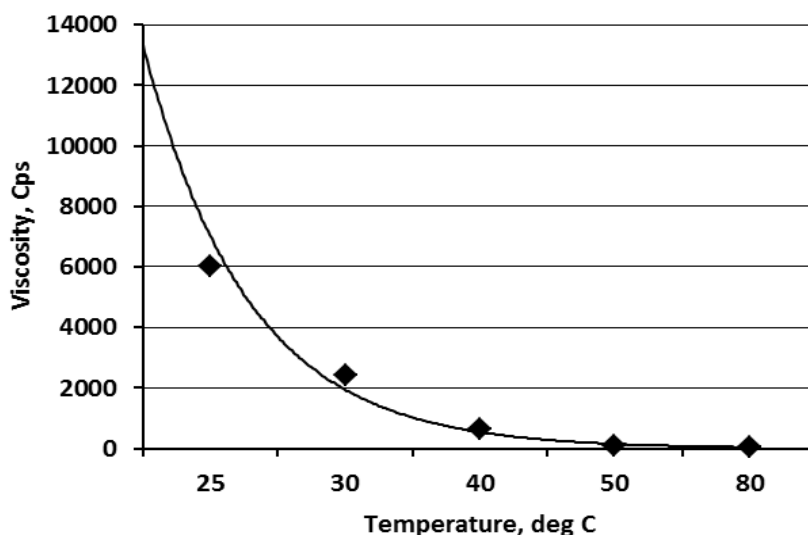

TECHNICAL BULLETIN

MAHP

Applications

MAHP is used in adhesives, coatings and other specialty polymers.

Handling & Storage

MAHP is a polymerizable monomer. It is inhibited with BHT, which requires dissolved oxygen to be effective. Use DRY AIR rather than nitrogen to pad vessels. Avoid excessive storage temperatures to prolong storage life. MAHP reacts with water to form acids. Protect from moisture contamination during storage.

Health Hazards

Read and understand Material Safety Data Sheets on all products before use. MAHP may cause severe irritation to eyes, skin, nose, throat and lungs. Avoid contact with skin, eyes and clothing. Use only with adequate ventilation. In case of contact, immediately flush skin or eyes with copious amounts of water for at least 15 minutes; get medical attention. Wash contaminated clothing before reuse.

Follow the recommendations in the MSDS for personal protective equipment when handling these materials.

Availability

MAHP is available from Dixie Chemical Company in Pasadena, Texas. Contact your Dixie representative for details.