

TECHNICAL BULLETIN

DIXIE CHEMICAL


10601 Bay Area Blvd.
Pasadena, TX 77507
Tel: (281) 474-3271
Fax: (281) 291-3384
E-Mail: info@dixiechemical.com

MHHPA 7030 NC

Typical Properties


Property	Values	Test Method
Molecular Weight	164	
Appearance	Clear and free of Particulate matter	D-104
APHA Color	25 Max	D-103 (ASTM D 1209)
HHPA, %	28-32	D-160
Total Anhydride, %	99 Min	D-160
Acid, %	1 Max	D-160 B4
Acid Number, mg KOH/g	675-695	D-160C

Specific Gravity as a Function of Temperature

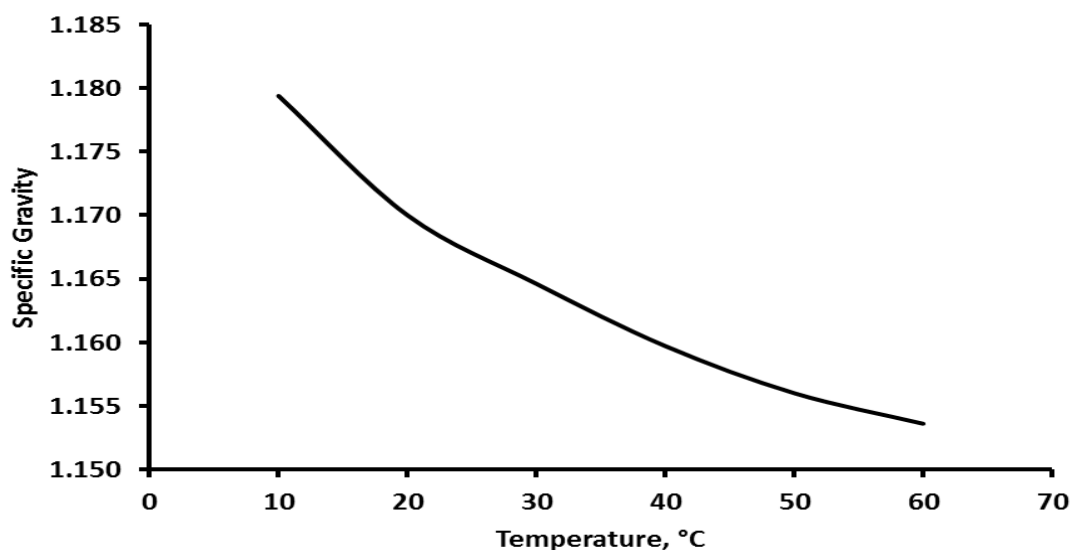

The data contained herein are furnished for information only and are believed to be reliable. This information is provided only as guidance and is not to be considered a warranty or quality specification. Dixie Chemical Company, Inc. makes no warranties (expressed or implied) as to its accuracy and assumes no liability in connection with any use of this product.

TECHNICAL BULLETIN MHHPA 7030 NC

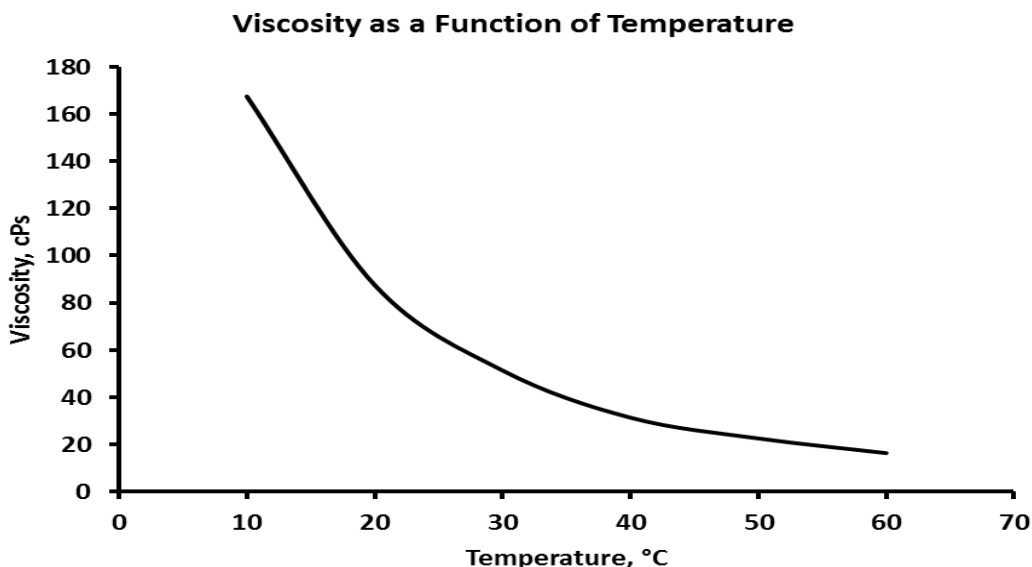

About

MHHPA 7030 NC is a low viscosity liquid anhydride blend designed for curing epoxy resins. It is composed of 70 parts methylhexahydrophthalic anhydride and 30 parts hexahydrophthalic anhydride.

Applications

MHHPA 7030 NC is used as an epoxy curative for applications such as coatings, castings and filament winding. The low viscosity of MHHPA 7030 NC and its high mix ratio with epoxy make the product particularly suitable for use in composite applications with high fiber loadings.

Example Formulation

Samples were prepared using a standard liquid BPA epoxy resin and 85 phr MHHPA 7030 NC. These were catalyzed with 1.06 phr BDMA. Gel time of the uncured blend was measured using a Shyodu Hot Pot at 130°C. Samples were cured for 4 hours at 130°C, followed by measurement of T_g .

Property	Measured
----------	----------

The data contained herein are furnished for information only and are believed to be reliable. This information is provided only as guidance and is not to be considered a warranty or quality specification. Dixie Chemical Company, Inc. makes no warranties (expressed or implied) as to its accuracy and assumes no liability in connection with any use of this product

TECHNICAL BULLETIN

MHHPA 7030 NC

Cured T _g	147°C
Gel Time	20 min

For more information on the use of anhydrides like MHHPA 7030 NC as epoxy curing agents, please consult the Technical Bulletin, FORMULATING ANHYDRIDE-CURED EPOXY SYSTEMS, available from Dixie Chemical Company.

Handling & Storage

MHHPA 7030 NC will react with water to form diacids. This is normally undesirable, so MHHPA 7030 NC should be stored in such a way that it is carefully protected from moisture contamination. When properly stored, MHHPA 7030 NC has a shelf life of 24 months.

Health Hazards

Read and understand the relevant Safety Data Sheets (SDS) for all products before use. These anhydrides are primary skin and eye irritants. Avoid contact with skin, eyes, and clothing. Use only with adequate ventilation. In case of contact, follow the procedures outlined in the SDS. Generally, these procedures include immediately flushing the affected skin or eyes with copious amounts of water for at least 15 minutes. In the case of eye contact, get medical attention. Wash contaminated clothing before reuse.

Follow the recommendations in the SDS for personal protective equipment when handling these materials. At a minimum, these procedures typically include protective chemical goggles, impenetrable gloves, and measures to avoid breathing chemical vapors.

Availability

MHHPA 7030 NC is available from Dixie Chemical in Pasadena, Texas. Contact your Dixie representative for details.