



BLOCK WORK ACCESSORIES



Block Reinforcement – Ladder / Truss Type


General:

Ladder / Truss types are used for the reinforcement of brick and block masonry to give improved tensile strength to walls subjected to lateral.


Applications:

Metal block reinforcements reduces the risk of cracking either at stress concentration around opening.


Specification:

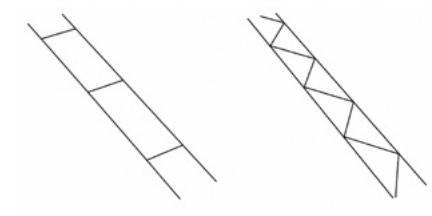

Width	Wall width	Length (Meter)	Thickness
50 mm	100 mm	3	3.8 / 4.8 mm
100 mm	150 mm	3	3.8 / 4.8 mm
150 mm	200 mm	3	3.8 / 4.8 mm

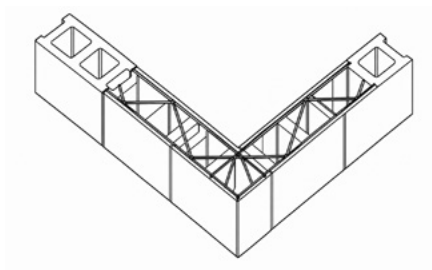

Width	Wall width	Thickness
50 mm	600X600mm	3.8 / 4.8 mm
100 mm	600X600mm	3.8 / 4.8 mm
150 mm	600X600mm	3.8 / 4.8 mm

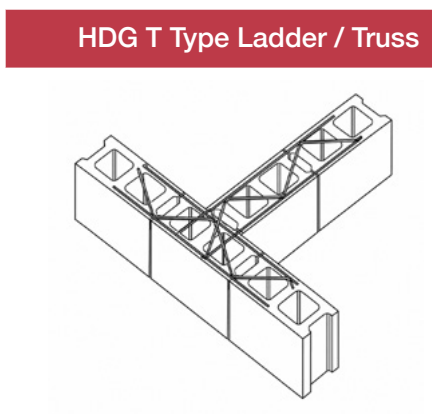

HDG T Type Ladder / Truss	Width	Wall width	Thickness
	50 mm	600X600mm	3.8 / 4.8 mm
	100 mm	600X600mm	3.8 / 4.8 mm
	150 mm	600X600mm	3.8 / 4.8 mm

Manufactured to : BS EN 10346 : 2009 (formerly BS EN 10142:1991) - ASTM A951/A951M Coating type : As Per ASTM A153 & ASTM A641


Dove Tail - Straight / Angle Wall Ties:

General:


Wall ties are used in one way of connecting masonry to concrete. This wall ties allows the two parts to act as a homogeneous unit. Hidden from view after construction, wall ties play a vital role in ensuring the stability of a building.

Applications:

Straight / Angle ties - Used for anchoring masonry to concrete.

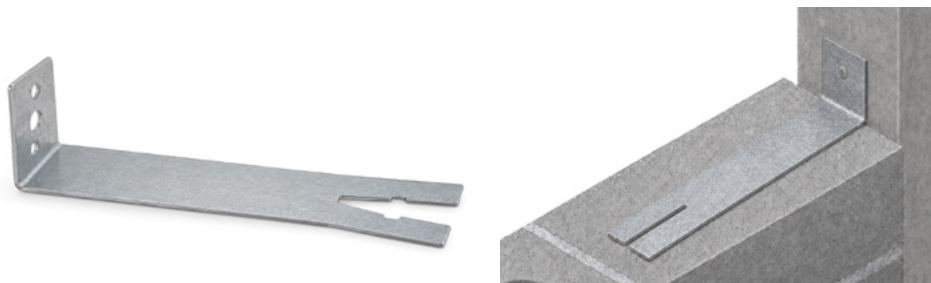

Code	Description	Width (mm)	Thickness (mm)	Length (mm)
K5-FT-01	Fish Wall Tie	20 - 50	1.5 - 4	170 - 350

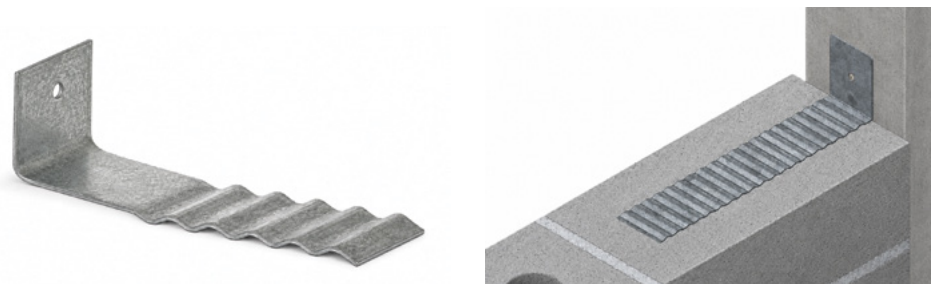

Code	Description	Width (mm)	Thickness (mm)	Length (mm)
K5-CT-01	Corrugated Wall Tie	20 - 50	1.5 - 4	170 - 350

Manufactured to : Galvanized – Steel sheet : BS EN 845 / BS EN 10346
Zinc coating: ASTM A 123 / 153 - ASTM A653
Stainless Steel to ASTM A240 / ASTM A666



Butterfly Wall Ties:

General:



Butterfly wall ties are steel reinforcement accessories designed to provide structural stability and effective bonding between the inner and outer leaves of cavity block walls. The butterfly shape enhances mortar bond, prevents slippage, and improves performance in load transfer.

Material & Finish Options:

- Electro-Galvanized Steel Wire
- Hot-Dip Galvanized Steel
- Stainless Steel Grade 304/ 316

Dimensions & Technical Data

Parameter	Typical Value / Range
Code	K5-BT
Tie Shape	Butterfly
Wire Diameter	3.0 -5.0 mm
Length (mm)	100-500 mm
Width (mm)	60-120 mm
Cavity Width (mm)	50-400 mm
Tensile Strength	> 500 N/mm2

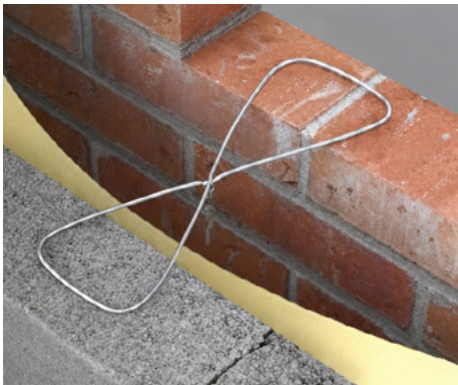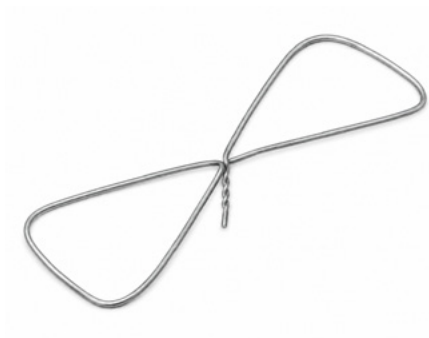



Double Triangle Wall Ties:

General:



Double Triangle Wall Ties, is essential for cavity wall reinforcement, holding the wall bracket inward the other cavity, for tightening the construction facility.

Code	Description	Dimension	Width (mm)	Length (mm)
K5-DT-02	Double Triangle Wall Ties	3.0-3.8	65-75	200 to 300

Wire Description: Carbon steel prefabricates from Cold Drawn Steel wire.

Available Finishes: Hot Dip Galvanized, Electro Galvanized

Specification Comply to: BS 729

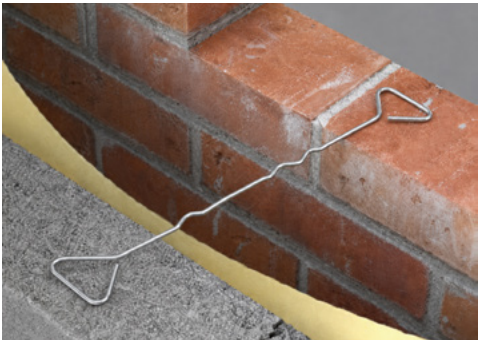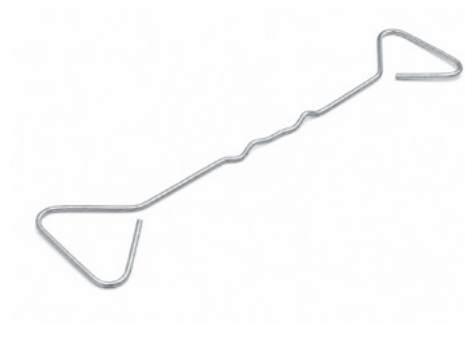

Installation Guidelines

- Embed ties minimum 38 mm into each leaf.
- Typical spacing: 450 mm vertically × 900 mm horizontally.
- Additional ties required around openings, corners, and movement joints.

General ASTM Requirements:

- Embedment: Wall ties must be embedded at least 38 mm (1.5 in.) into the mortar bed of each masonry leaf and Maintain a minimum 16 mm cover from the exposed masonry face to prevent corrosion.
- Spacing: Generally, 450 mm vertically × 900 mm horizontally; closer spacing may be required for wide cavities or higher wind/seismic loads.

Manufacturer Recommended Wall Tie Length vs. Cavity Width:

Cavity Width (mm)	Tie Length (mm)
Code	(130-200) mm
Tie Shape	(205 -230) mm
Wire Diameter	250 mm + (Project design)

Specification:

- *Electro-Galvanized Steel Wire: ASTM A641
- *Mild Steel: ASTM A82 / Hot-Dip Galvanized: ASTM A153 / BS EN ISO 1461
- *Stainless Steel: ASTM A276 / BS EN 10088

Other Ties & Anchors:- Movement Ties:

General:

Restrains the masonry against the lateral wind loads while the sleeve will allow the masonry to contract or expand during movement.




Code	Description	Width (mm)	Length (mm)	Thickness (mm)
K5-MT	Movement wall ties	25 - 40	190 - 350	1.5 – 4.0

Rigid Anchors:

General:

Fabricate from steel bars, with ends turned up or with cross pins unless otherwise indicated.

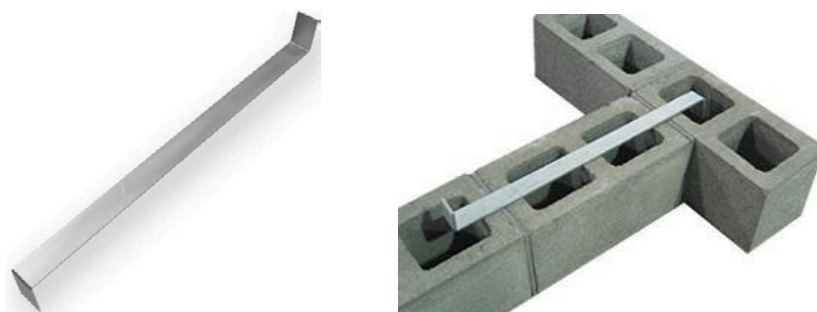

All sizes can be manufactured.


Material: Steel sheet: BS EN 845

Galvanized Zinc coating: ASTM A 123 or A153 - ASTM A653

Wall support – Loading Plate & Bracket

General:


Restraints to allow for vertical or thermal movement of the wall and resists shear or wind loads.

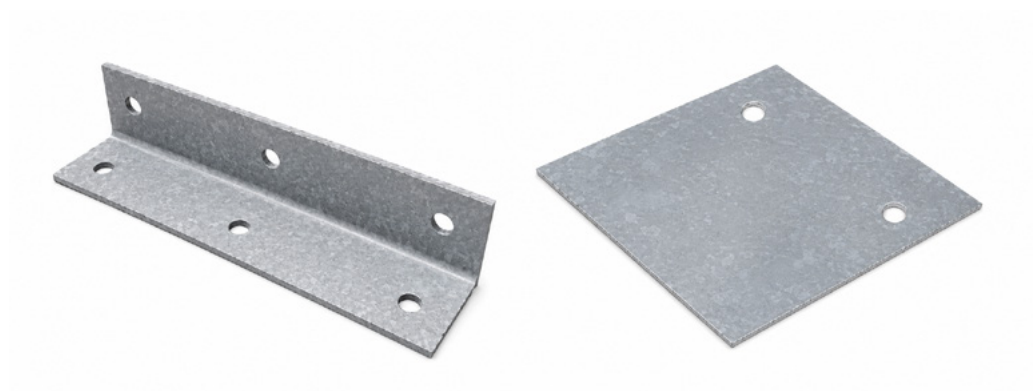

Code	Description	Dimension	Thickness (mm)
K5-AHR	Galv. Angle Head Restraint	As per Site Request	1.5 – 10
K5-PHR	Galv. Plate Head Restraint	As per Site Request	1.5 – 10

Material: Galvanized – Steel sheet: BS EN 845 / BS EN 10346

Zinc coating: ASTM A 123 / 153 - ASTM A653

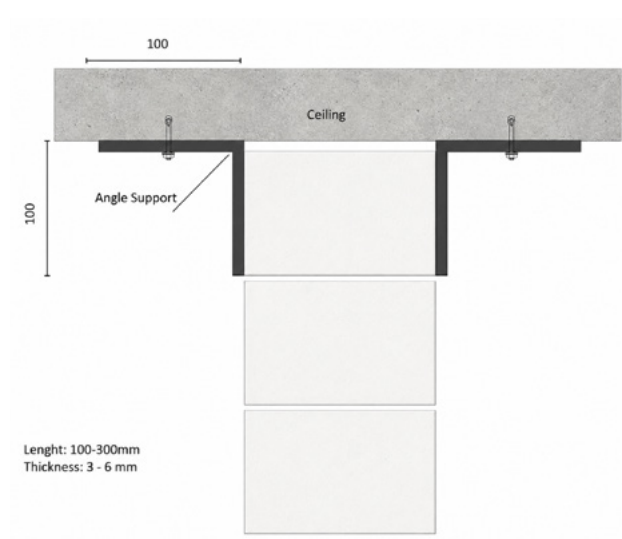


Wall support – Adjustable Head Restraint

General:

Used for restraining the top of internal walls or the top of the inner leaf of a cavity wall. The opening at the bent part of the channel system is sealed to prevent mortar ingress and ensure vertical movement between the block work and the structure.

The base of the stem must be built within a bed joint and an embedment of 50mm from the edge of the lock. The max. joint between the top of the block work and the underside of the frame should not be greater than 25mm.

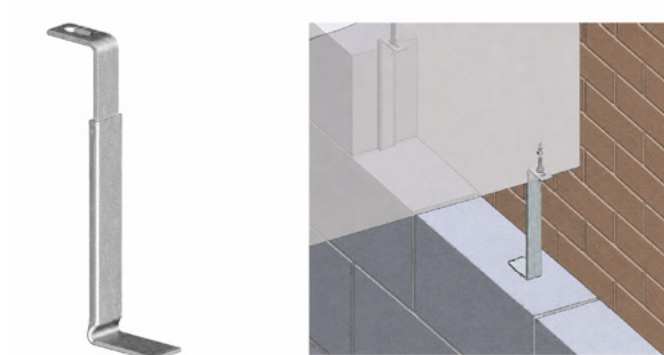

Code	Description	Thickness (mm)	Embedment (mm)	Width (mm)
K5-THR	Galv. Tie	1.5 – 2.0	50 - 70	30 - 40
K5-SHR	Galv. Sleeve	1.0 – 1.2	70 - 100	30 - 40

Material: Galvanized – Steel sheet: BS EN 845 / BS EN 10346

Zinc coating: ASTM A 123 / 153 - ASTM A653



Wall support – Partition Top Anchors

1. Rod (PTA-R)

General:

Partition Top Anchors provides lateral shear resistance at the upper limit of the masonry walls. They permit vertical deflection of the slab above, without transferring compressive loads to the masonry below.

PTA – R is attached to the concrete or steel structure. A neoprene sponge or any compressible filler is placed between the above structure and the masonry below thus allowing vertical expansion and contraction.

The clear butyrate tubes with compressible polyethylene filler placed over the rod anchor isolates the anchor from the surrounding mortar so the anchor will slide vertically.



Code	Plate (mm) – Thick.	Rod (mm) – Dia.
PTA - R	2 to 4mm	8 to 12mm

Material: Steel sheet : BS EN 845

Galvanized Zinc coating: ASTM A 123 or A153 - ASTM A653

2. C Bracket (PTA-C)


General:

Partition top anchors provide lateral shear resistance at the upper limit of masonry walls and it allowing vertical and horizontal expansion for the masonry, they permit vertical deflection of the slab above without transferring compressive loads to the masonry wall below.



Neoprene Sponge or any other compressible filler is placed between the above structure and the masonry below thus allowing vertical expansion and contraction.

- Anchors are suitable for construction using steel or concrete.
- Partition top anchors are for bolted or welded connections.



Code	Plate (mm) – Thick.	Wall Size/C Bracket Width	Side Width
PTA - C	1 to 8 mm	4 to 12mm	Standard 70 mm

Material:

Hot Dip Galvanized or Galvanized Iron or Stainless Steel
 Mill Galvanized - ASTM A 653
 Hot-Dip Galvanized after fabrication - ASTM A 123 / 153
 S.S 304 or 316

Product Data Sheet

K5-Block Work Access

REV 00, July 2026

TDS-08-01-BWA

COIL LATH

General:

Coil lath is a high quality expanded galvanized steel mesh Used in Building construction for reinforcing block / brick work to be embedded to give high strength and crack control.

It also reduces the effects of vibration, settlement and temperature changes.

Applications:

Block Reinforcement Mesh is used to reinforce the joints of the masonry to reduce cracking and reinforce the mortar.



Specification:

Block Reinforcement Mesh is used to reinforce the joints of the masonry to reduce cracking and reinforce the mortar.

Type Code	Mesh Width (mm)	Block Width (mm)	Length (m)	
			Coils	Strip
KCL05	50 (2")	100	25 and 50	2.44
KCL10	100 (4")	150	25 and 50	2.44
KCL15	150 (6")	200	25 and 50	2.44
KCL20	200 (8")	250	25 and 50	2.44

Weights are arranged as per requirements.

Specification:

BS EN 10346 : 2009 (Replaced BS EN 10327) coating type : Z180-275
ASTM A 653/A653M