




C-CHANNEL 21×41×1.8 mm



High-performance pre-galvanized and hot-dip galvanized C-Channels designed for structural framing, suspension, and support systems, manufactured to meet international standards (ASTM/EN/DIN).

Product Specifications:

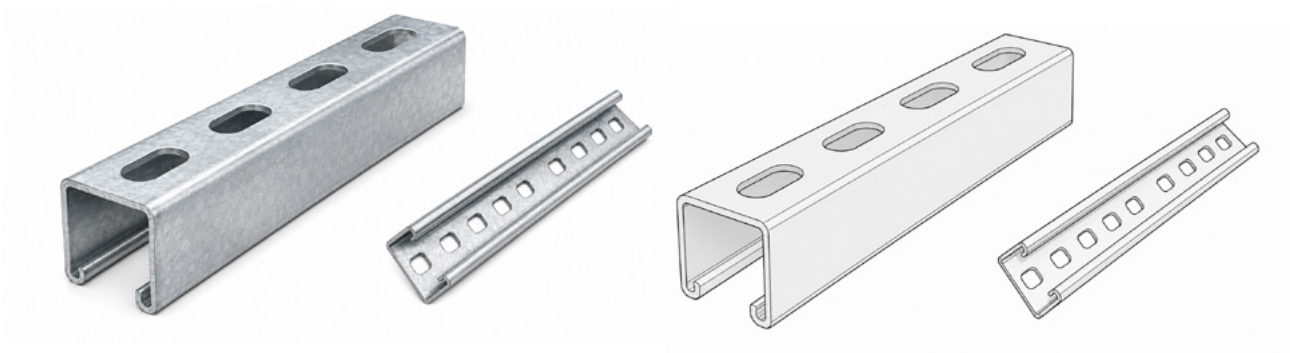

K-Five C-Channel





Material Finish: Pre-Galvanized /HDG

Standard Length :3 Mtr

Custom lengths available upon requests (Max. Length 6 Mtr)

Structural Properties:

Property	Symbol	Unit	Value
Cross Section Area	A	cm ²	1.429
Moment of Inertia	I _y	cm ⁴	3.69
Moment of Inertia	I _z	cm ⁴	6.078
Section Modulus	S _y	cm ³	1.375
Torsional Constant	IT	cm ⁴	0.0154
Plastic Moment Capacity	M _{pl,y}	kNm	0.375
Self-Weight	G	kg/m	1.405

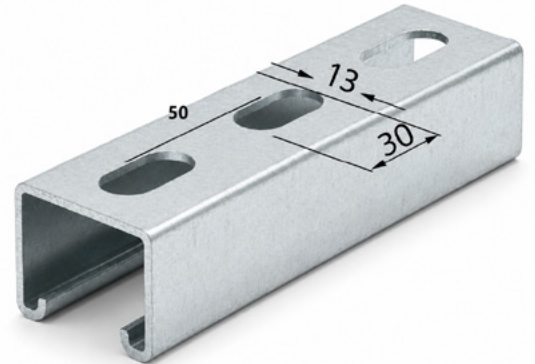

Load Tables:

The following values represent allowable pointed & uniform loads for simply supported beams under uniform load with deflection limits at L/240 According to AISC (Steel Design Manual) with STAAD Pro. reports

Span (cm)	Allowable pointed Load (N)	Allowable uniform Load (N/mm)	Deflection L/240 (mm)
50	980	1.96	2.08
100	242	0.242	4.16
150	101	0.067	6.25
200	62	0.031	8.33
300	27	0.009	12.19





Design Notes & Installation

- Installation spacing should not exceed 1.2 m for typical loads.
- Recommended for use with K-Five brackets and anchor systems.
- For heavy or dynamic loads, consult K-Five technical support for custom design.
- Calculations based on allowable stress design per EN 1993-1-1.

Quality & Standards

Manufactured under ISO 9001:2015 quality management system.

Material traceability and test certificates available upon request.

Galvanizing per EN 10346 with coating options Z140 to Z275.