




C-CHANNEL 21×41×2.0 mm



High-performance pre-galvanized and hot-dip galvanized C-Channels designed for structural framing, suspension, and support systems, manufactured to meet international standards (ASTM/EN/DIN).

Product Specifications:

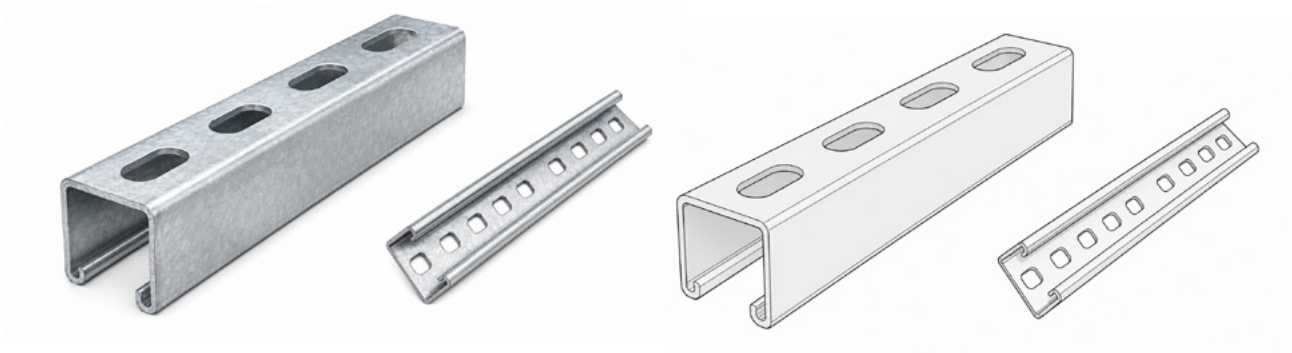

K-Five C-Channel

Material Finish: Pre-Galvanized /HDG

Standard Length :3 Mtr

Custom lengths available upon requests (Max. Length 6 Mtr)

Product Data Sheet



K5-C Channel 21-2

REV 00, July 2026

TDS-01-05-CCL

Structural Properties:

Property	Symbol	Unit	Value
Cross Section Area	A	cm ²	1.62
Moment of Inertia	I _y	cm ⁴	0.88
Moment of Inertia	I _z	cm ⁴	4.25
Section Modulus	S _y	cm ³	0.75
Torsional Constant	IT	cm ⁴	0.02
Plastic Moment Capacity	M _{pl,y}	kNm	0.24
Self-Weight	G	kg/m	1.27

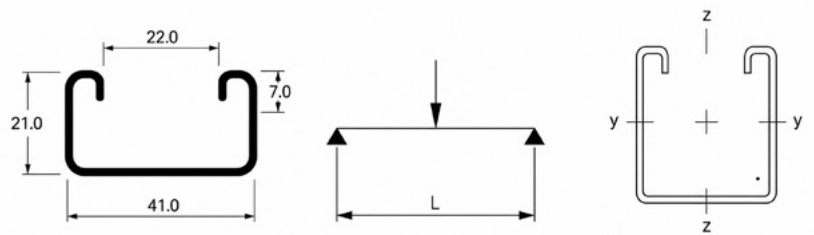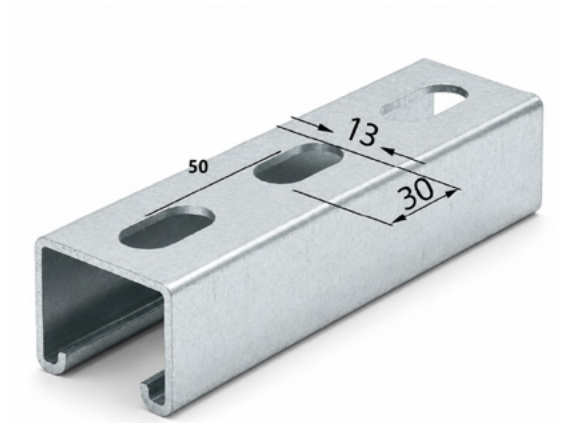

Load Tables:

The following values represent allowable pointed & uniform loads for simply supported beams under uniform load with deflection limits at L/240 According to AISC (Steel Design Manual) with STAAD Pro. reports

Span (cm)	Allowable pointed Load (N)	Allowable uniform Load (N/mm)	Deflection L/240 (mm)
50	1050	2.100	2.04
100	265	0.365	4.16
150	110	0.073	6.21
200	67	0.033	8.33
300	30	0.010	12.40





Design Notes & Installation

- Installation spacing should not exceed 1.2 m for typical loads.
- Recommended for use with K-Five brackets and anchor systems.
- For heavy or dynamic loads, consult K-Five technical support for custom design.
- Calculations based on allowable stress design per EN 1993-1-1.

Quality & Standards

Manufactured under ISO 9001:2015 quality management system.

Material traceability and test certificates available upon request.

Galvanizing per EN 10346 with coating options Z140 to Z275.