




C-CHANNEL 41×41×1.8 mm



High-performance pre-galvanized and hot-dip galvanized C-Channels designed for structural framing, suspension, and support systems, manufactured to meet international standards (ASTM/EN/DIN).

### Product Specifications:

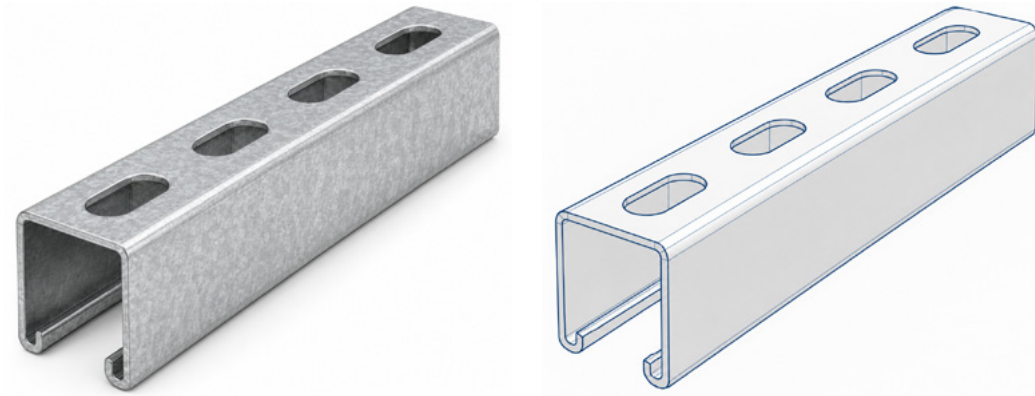

#### **K-Five C-Channel**

Material Finish: Pre-Galvanized /HDG



Standard Length :3 Mtr

Custom lengths available upon requests (Max. Length 6 Mtr)



Structural Properties:

| Property                | Symbol            | Unit            | Value |
|-------------------------|-------------------|-----------------|-------|
| Cross Section Area      | A                 | cm <sup>2</sup> | 2.149 |
| Moment of Inertia       | I <sub>y</sub>    | cm <sup>4</sup> | 2.069 |
| Moment of Inertia       | I <sub>z</sub>    | cm <sup>4</sup> | 6.459 |
| Section Modulus         | S <sub>y</sub>    | cm <sup>3</sup> | 1.009 |
| Torsional Constant      | IT                | cm <sup>4</sup> | 0.023 |
| Plastic Moment Capacity | M <sub>pl,y</sub> | kNm             | 0.372 |
| Self-Weight             | G                 | kg/m            | 1.687 |

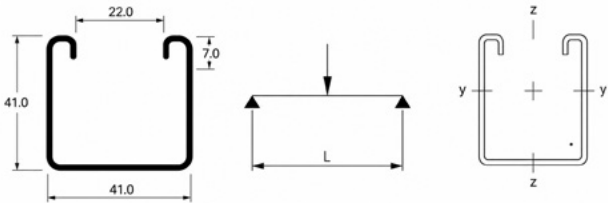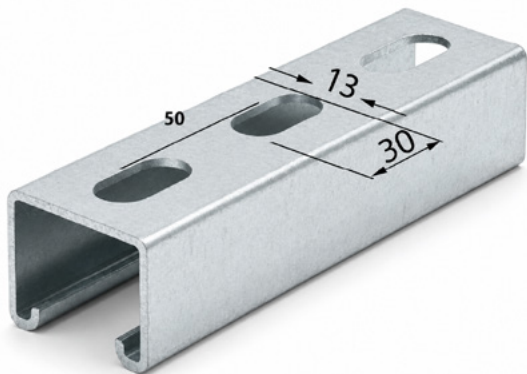

Load Tables:

The following values represent allowable pointed & uniform loads for simply supported beams under uniform load with deflection limits at L/240 According to AISC (Steel Design Manual) with STAAD Pro. reports

| Span (cm) | Allowable pointed Load (N) | Allowable uniform Load (N/mm) | Deflection L/240 (mm) |
|-----------|----------------------------|-------------------------------|-----------------------|
| 50        | 6050                       | 12.10                         | 2.08                  |
| 100       | 1550                       | 1.55                          | 4.16                  |
| 150       | 690                        | 0.46                          | 6.25                  |
| 200       | 395                        | 0.197                         | 8.33                  |
| 300       | 238                        | 0.079                         | 12.50                 |





## Design Notes & Installation

- Installation spacing should not exceed 1.2 m for typical loads.
- Recommended for use with K-Five brackets and anchor systems.
- For heavy or dynamic loads, consult K-Five technical support for custom design.
- Calculations based on allowable stress design per EN 1993-1-1.

## Quality & Standards

Manufactured under ISO 9001:2015 quality management system.

Material traceability and test certificates available upon request.

Galvanizing per EN 10346 with coating options Z140 to Z275.