




C-CHANNEL 41×41×2.5 mm



High-performance pre-galvanized and hot-dip galvanized C-Channels designed for structural framing, suspension, and support systems, manufactured to meet international standards (ASTM/EN/DIN).

Product Specifications:

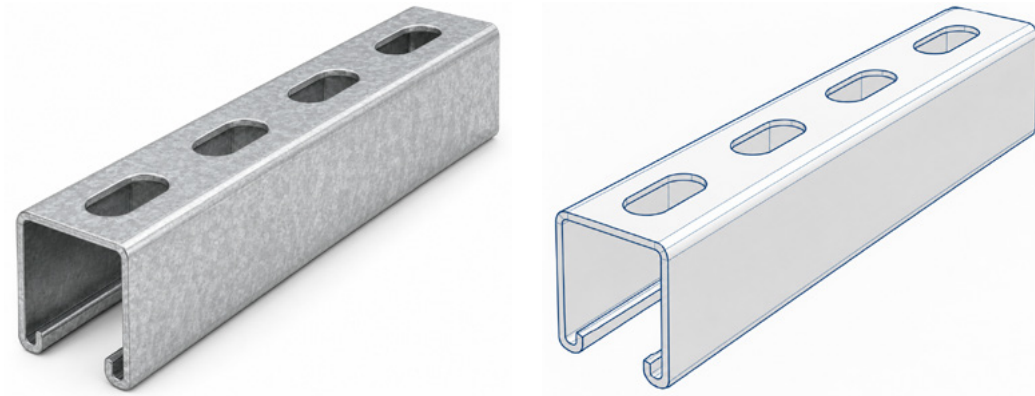

K-Five C-Channel

Material Finish: Pre-Galvanized /HDG



Standard Length :3 Mtr

Custom lengths available upon requests (Max. Length 6 Mtr)



Structural Properties:

Property	Symbol	Unit	Value
Cross Section Area	A	cm ²	2.95
Moment of Inertia	I _y	cm ⁴	5.87
Moment of Inertia	I _z	cm ⁴	8.76
Section Modulus	S _y	cm ³	2.72
Torsional Constant	IT	cm ⁴	0.07
Plastic Moment Capacity	M _{pl,y}	kNm	0.82
Self-Weight	G	kg/m	2.32

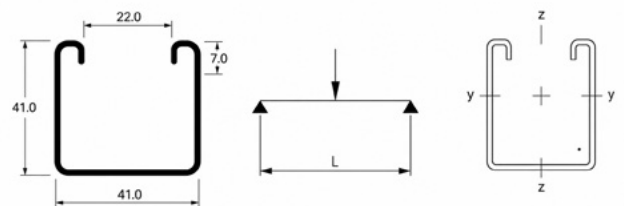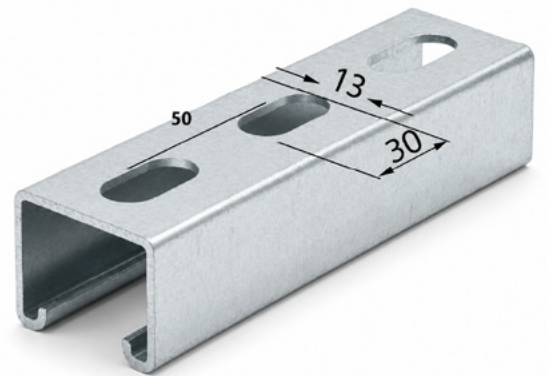

Load Tables:

The following values represent allowable pointed & uniform loads for simply supported beams under uniform load with deflection limits at L/240 According to AISC (Steel Design Manual) with STAAD Pro. reports

Span (cm)	Allowable pointed Load (N)	Allowable uniform Load (N/mm)	Deflection L/240 (mm)
50	8100	16.2	2.08
100	2080	2.08	4.15
150	925	0.61	6.24
200	530	0.265	8.30
300	235	0.078	12.50





Design Notes & Installation

- Installation spacing should not exceed 1.2 m for typical loads.
- Recommended for use with K-Five brackets and anchor systems.
- For heavy or dynamic loads, consult K-Five technical support for custom design.
- Calculations based on allowable stress design per EN 1993-1-1.

Quality & Standards

Manufactured under ISO 9001:2015 quality management system.

Material traceability and test certificates available upon request.

Galvanizing per EN 10346 with coating options Z140 to Z275.