



PLASTERING ACCESSORIES



General Information

K5 plastering accessories are manufactured from high-quality pre-galvanized steel in compliance with ASTM A653 Z180–275 standards. They provide durable reinforcement and precise finishing for all types of plastering and rendering works.

Applications: Suitable for internal and external works.


Finish: Galvanized for corrosion resistance.

Advantages: Strength, easy fixing, impact resistance, prevents cracks & chipping.





METAL LATH SHEETS

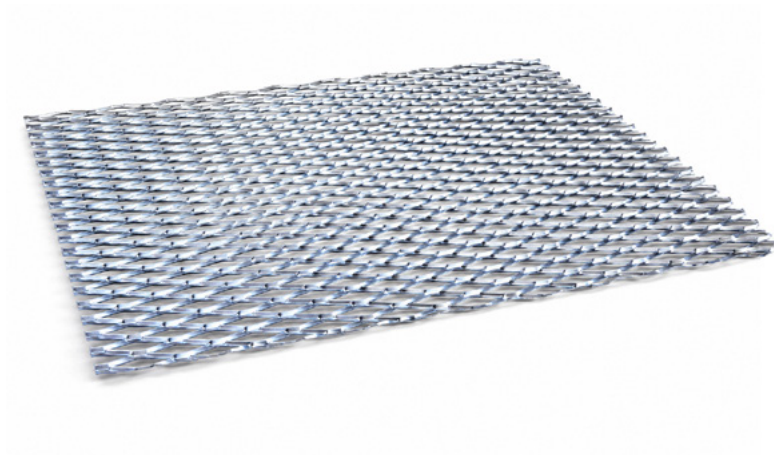


Description:

Expanded lathing for plaster base, ceilings, partitions, and masonry reinforcement

Specification:

Size (mm)	Material	Weight (kg/m ²)	Packing
2440 x 600	Galvanized Steel	0.75 – 1.8	500 Sheets


*Tolerance in Metal lath weight +/-5%

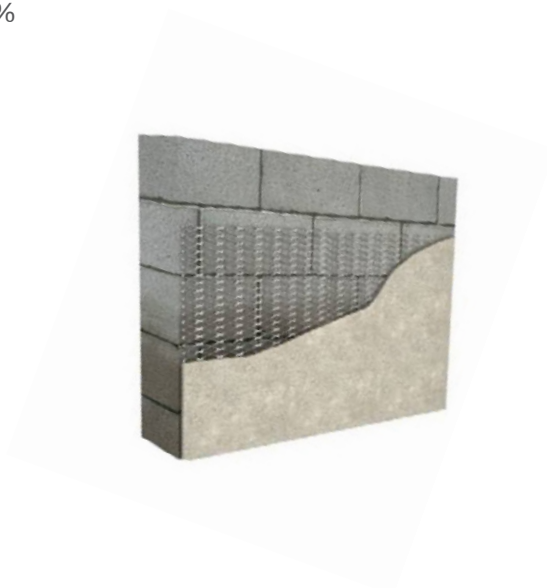

Product Data Sheet
K5-Plaster Access
REV 00, July 2026
TDS-05-01-PA



INTERNAL CORNER MESH

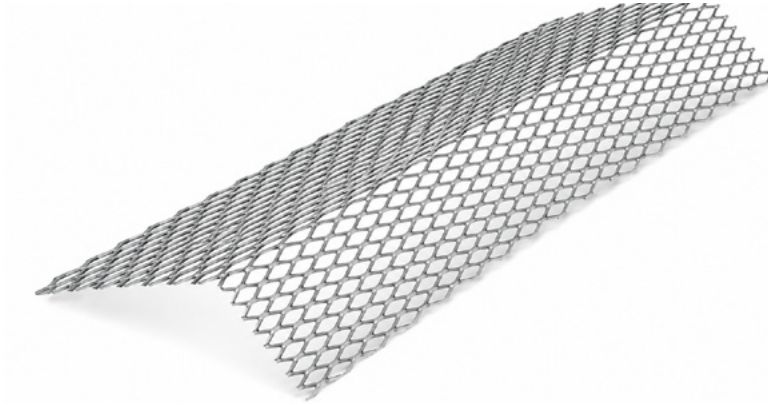


Description:

GI corner angle mesh with expanded wings for reinforcing internal plaster corners. Prevents edge cracks and provides a clean finish.

Specification:

Code	Width	Length	Angle	Weight(kg/m ²)
KB75	50-100 mm	2440 mm	90 °	0.75 – 1.8kg/m ²

ANGLE BEADS

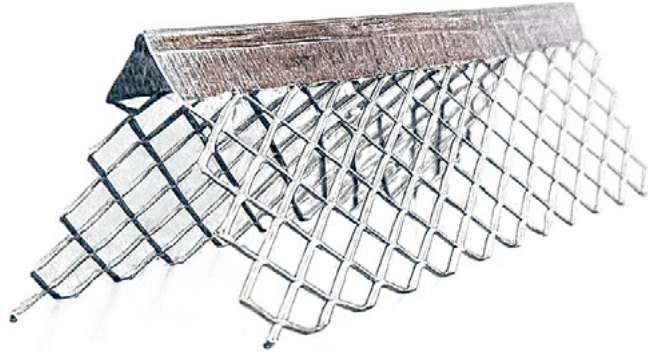

Description:

Expanded Angle bead is designed to offer strong angle reinforcement for conventional applications. Angle beads are resistant to chips, cracks and impact damage. It protects the corner edges and offers good shape.

Applications:

The productions are mainly used for reinforcement purposes and for plaster or render embracing.


Specification:

Code	Size	Wing Width (mm)	Length	Packing
K50	5 cm	50 x 50	3000 mm	50 pcs / Box
K70	7 cm	70 x 70	3000 mm	50 pcs / Box





PLASTER STOP BEADS

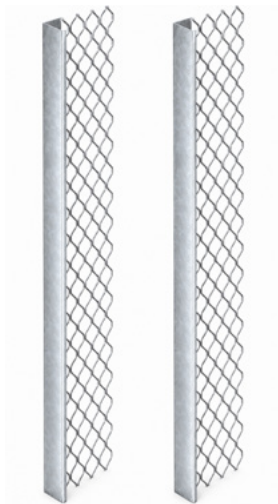

General:

Expanded Stop Beads with expanded wings. Designed to reinforce and define plaster board edges. Ideal for reinforcing external angles when using and undercoat plaster.

Applications:

Common applications of the stop bead on plaster wall are expansion joints, door jambs, skirting and wherever a finished plaster edge is required.


Specification:

Code	Depth (mm)	Length (mm)	Packing
K10	10	3000	50 pcs/box
K13	13	3000	50 pcs/box
K16	16	3000	50 pcs/box
K19	19	3000	50 pcs/box





ARCHITRAVE BEADS

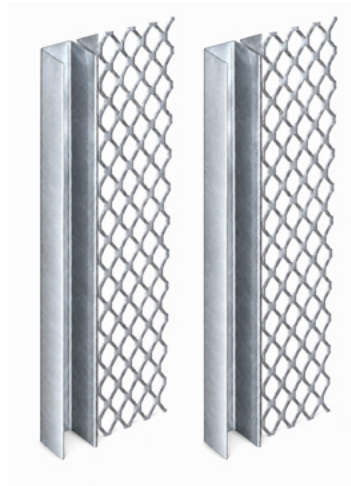

General:


Designed to form a plaster stop and shadow line recess around door frames and elsewhere. They provide a key for plaster and a guide for ruling off.(Give Decorative Joint).

Applications:

Galvanized Architrave bead is used for internal & external plastering purpose. The bead firmly inserts into the plaster and offers a straight line and reinforce to let it more firm.


Specification:

Code	Size	Depth	Length	Packing
K15	1.5 cm	13 mm	3000 mm	25 pcs/box
K22	2.2 cm	13 mm	3000 mm	25 pcs/box

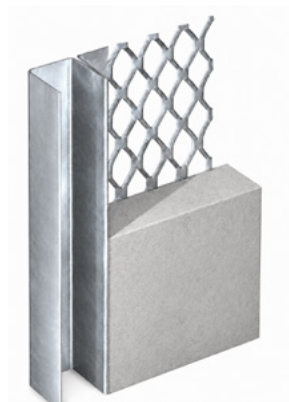



CONTROL JOINT BEADS

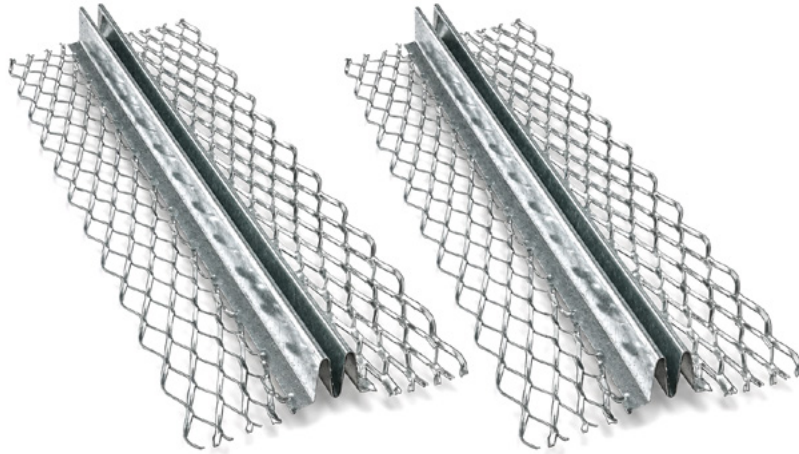

Description:

Galvanized steel control beads for forming joints in large plaster/render areas. Allow expansion & prevent cracking.

Specification:

Code	Plaster Depth	Groove Width	Length	Packing
KCB13	13 mm	10 mm	3000 mm	25 pcs/box





MOVEMENT BEADS




Description:

Two plaster stop beads connected with PVC extrusion, providing ± 3 mm movement. Used for expansion and stress relief.

Specification:

Plaster Depth	Length	Packing
10 mm	2900 mm	20 pcs/box

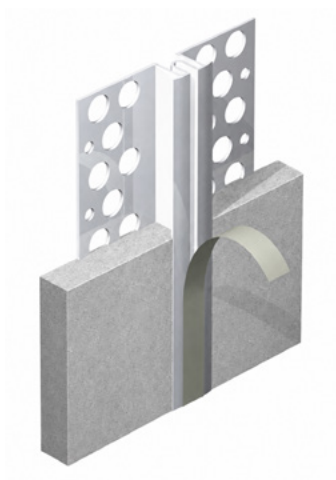



DELIVERY, HANDLING AND STORAGE:

- **Delivery:** Materials are to be delivered in original packages, containers or bundles containing the manufacturers or supplier's identification.
- **Transportation:** In transportation or lifting, handle products with care avoiding excessive stress and preventing damages.
- **Storage:** Store materials under a shaded area and keep them dry and protected against damage due to weather condition, humidity level, job site location, storage condition and surface contamination.

QUALITY ASSURANCE:

Our Quality Assurance Program has been developed and implemented for compliance with ISO9001:2008. We also comply with various industry standards and specifications.