



C-CHANNELS



INTRODUCTION

Our strut support system offers an economical solution for various electrical, mechanical, and industrial supports within the construction industry. Designed with time-saving features, the system is fully adjustable and reusable, with a complete line of channels, fittings, and accessories for multi-purpose applications.

Channel Specifications:

The metal framing channel is cold formed from low carbon steel on modern rolling machines continuous slot allows for attachments at any point along the channel.

Material Specifications:


Standard Finishes:

- Pre-Galvanized finish (ASTM A653 M).
- Hot Dip Galvanized after fabrication (ASTM A123 or BS EN ISO 1461: 2009).


Lengths:

- Standard Length: 3000 mm (+/- 3.2 mm tolerance).
- Custom Lengths: Available upon request (Maximum Length 6 Mtr)

Types of C-Channel:

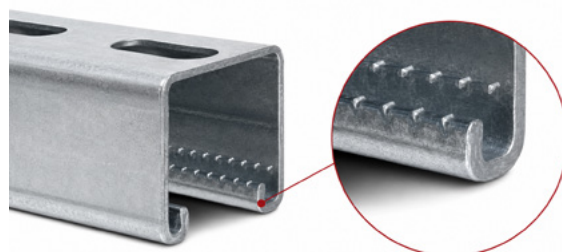

Code	Height (H)	Width (W)	Thickness (T)
K5C18-G (1.0mm)	18.0 mm	27.0 mm	1.0 mm
K5C21-G (1.0mm)	21.0 mm	41.0 mm	1.0 mm
K5C21-E (1.2mm)	21.0 mm	41.0 mm	1.2 mm
K5C21-C (1.4mm)	21.0 mm	41.0 mm	1.4 mm
K5C41-C (1.4mm)	41.0 mm	41.0 mm	1.4 mm
K5C21-A (1.8mm)	21.0 mm	41.0 mm	1.8 mm
K5C41-A (1.8mm)	41.0 mm	41.0 mm	1.8 mm
K5C21.20	21.0 mm	41.0 mm	2.0 mm
K5C21.25	21.0 mm	41.0 mm	2.5 mm
K5C41.20	41.0 mm	41.0 mm	2.0 mm
K5C41.25	41.0 mm	41.0 mm	2.5 mm

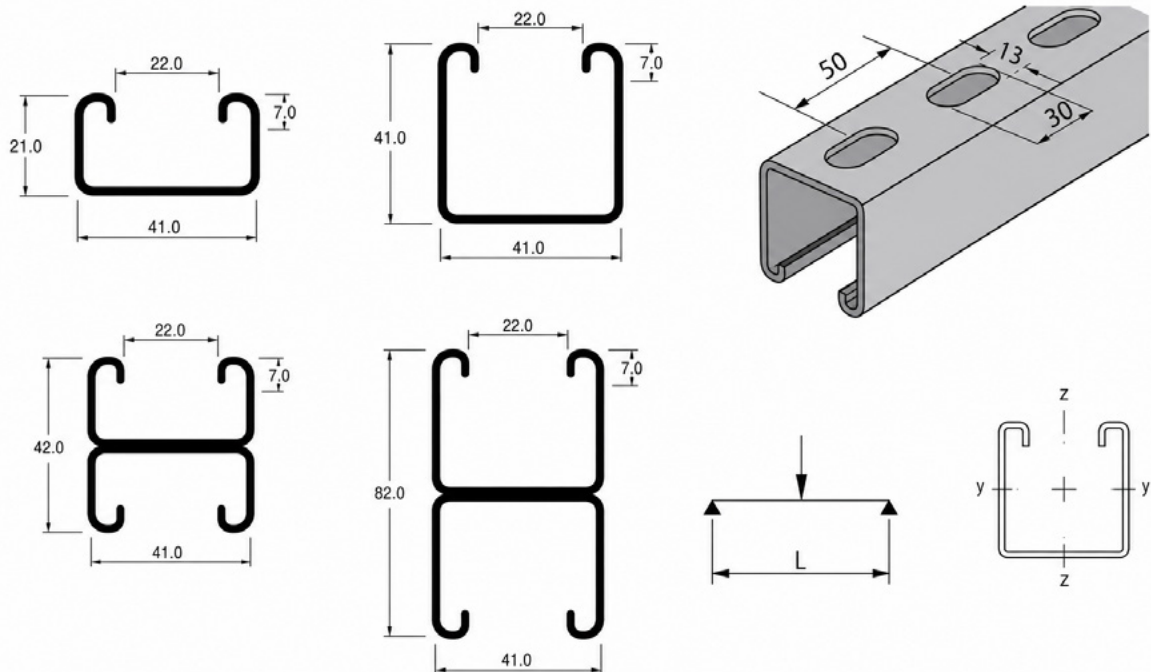




Welding Procedures (Back-to-Back Channels)

Welding procedures align with the American Welding Society (AWS) Standards.

- **MIG Welding (GMAW):** Used when physical dimensions or certain combinations require an alternative to automatic spot welding. The same strict quality control requirements apply to both MIG and spot-welded products.

Quality Assurance

Our Quality Assurance Program is developed and implemented for compliance with **ISO 9001: 2008**. We also adhere to various other industry standards and specifications.

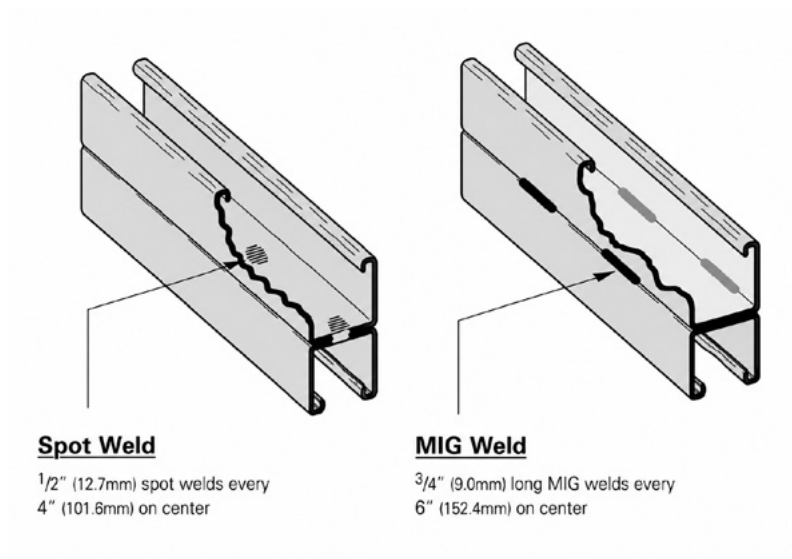





C-Channel Application:

Our strut system provides an economical solution for electrical, mechanical and industrial supports with an unlimited variety of applications in the construction industry.


1. Electrical Application

- Lighting Fixture Supports
- Raceway Systems
- Trapeze Hangers
- Pipe & Conduit Supports
- Cable Tray Supports
- Beam Adjustments

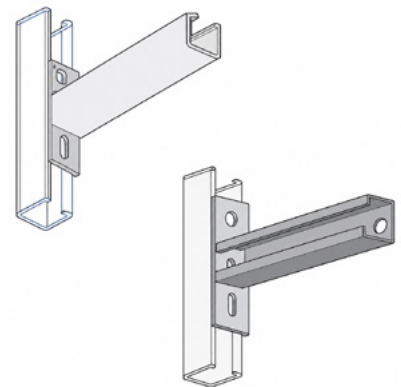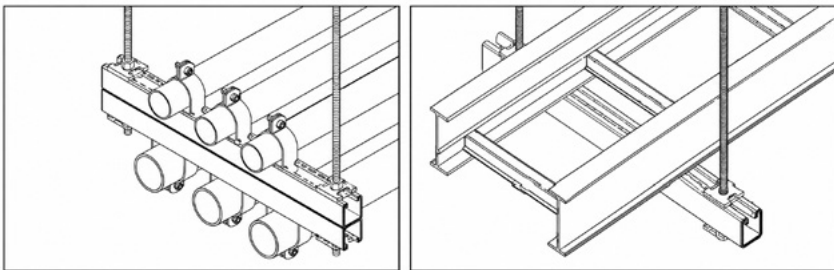

2. Mechanical Application

- Piping Racks
- Tunnel Pipe Stanchions
- Concrete Inserts
- Beam Attachments
- Pipe Risers
- Stone Mechanical Fixing
- HVAC Duct Support

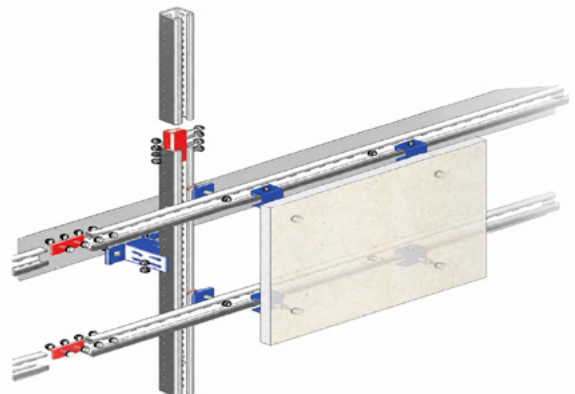

Product Data Sheet

K5-Strut Channels

REV 00, July 2026

TDS-06-01-SC



3. Industrial Applications

- Racks and Shelving
- Partitions
- Production Line Supports
- Trolley Systems
- Wall Framing




4. Unistrut Ceiling Grid System

Unistrut Ceiling Grids are ideal for supporting miscellaneous MEP and decorative panels, and for offering infinite adjustment of lighting. Attachments can be made anywhere along the channel opening without welding or drilling, leading to significant time and labor cost savings. Applications include Architectural, Telecom, Data Grids, and Medical Equipment Support

Application:

- Architectural Grids
- Telecom Grids
- Data Grids
- Medical Equipment

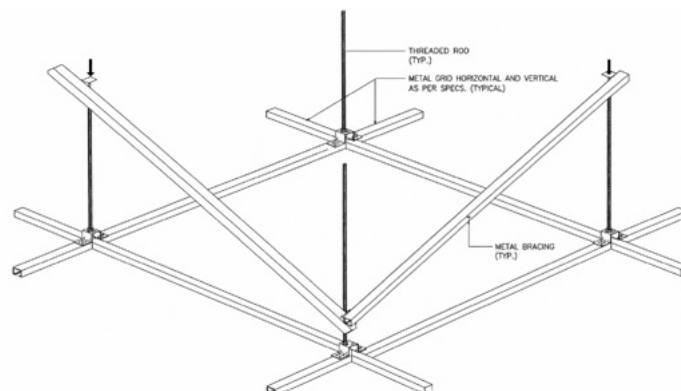

Product Data Sheet

K5-Strut Channels

REV 00, July 2026

TDS-06-01-SC

C-CHANNEL CANTILEVER ARM:



It is designed to provide structural support or act as a load-bearing component in construction projects, and it has the following characteristics: durability, ease of installation, high load bearing capacity, and corrosion resistance. It may be utilized in industries such as construction, manufacturing, and infrastructure projects.



1. Features and Benefits:

The wall plate is welded to strut profile slots arranged at 90° to each other, enabling both internal and external linear welding. The total support length is equal to the cable tray width plus 55 mm, providing adequate clearance from the adjacent wall or surface. This cantilever arm, with a 41 mm strut width, offers a quick, secure, and efficient installation solution when used in conjunction with a strut clamp.

2. Products Information:

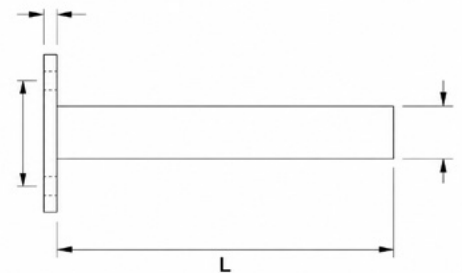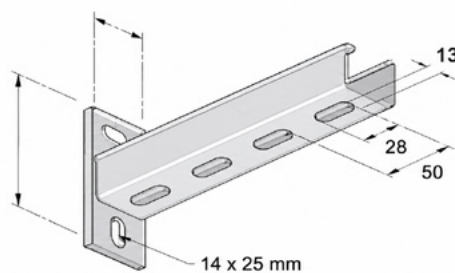

Parameter	Description
Product Name	C-Channel Cantilever arm with Base Plate
Material	Steel
Dimensions	21*41*2.5mm * L 41*41*2.5mm * L 21*41*2.0mm * L 41*41*2.0mm * L Length Depend on site conditions
Finish	Hot Dip Galvanized
Specification	Steel A36 – Galv. ASTM A123 / A153 standards.
Corrosion Resistance	Excellent
Safety Precautions	Use proper lifting techniques



DELIVERY, HANDLING AND STORAGE:

- **Delivery:** Materials are to be delivered in original packages, containers or bundles containing the manufacturers or supplier's identification.
- **Transportation:** In transportation or lifting, handle products with care avoiding excessive stress and preventing damages.
- **Storage:** Store materials under a shaded area and keep them dry and protected against damage due to weather condition, humidity level, job site location, storage condition and surface contamination.

QUALITY ASSURANCE:

Our Quality Assurance Program has been developed and implemented for compliance with ISO9001:2008. We also comply with various industry standards and specifications.

K5 IS THE RIGHT CHOICE FOR YOUR BUILDING MATERIALS