

# Technical specification

Valve-regulated lead-acid battery with Absorbent Glass Mat (AGM) separator. Sealed construction for standby power applications.

**12 V**

6 cells

**26 Ah**

10 h to 10.8 V at 25°C

**115 W/cell**

15 min to 1.67 V/cell at 25°C

## Electrical performance

|                       |                                 |
|-----------------------|---------------------------------|
| 10-hour capacity      | 26 Ah at 2.60 A to 10.8 V, 25°C |
| 20-hour capacity      | 28 Ah at 1.40 A to 10.8 V, 25°C |
| Internal resistance   | <=8.0 mOhms at 25°C             |
| Maximum discharge     | 260A for 5 seconds at 25°C      |
| Self-discharge        | 3% average per month at 20°C    |
| Design life / standby | 12 years                        |

## Charging and operating conditions

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Charge method            | Constant voltage                                           |
| Float / cycle voltage    | 13.38-13.80 V / 14.40-14.70 V at 25°C                      |
| Maximum charge current   | 8.4A                                                       |
| Temperature compensation | Float: -20 mV/°C per battery; cycle: -30 mV/°C per battery |
| Operating temperatures   | Discharge: -20 to +60°C; charge: -10 to +60°C              |
| Storage temperature      | -20 to +60°C                                               |

## Mechanical specification

|                        |                                           |
|------------------------|-------------------------------------------|
| Dimensions (L × W × H) | 165 × 125 × 175 mm; overall height 175 mm |
| Approximate weight     | 9.6 kg ±5%                                |
| Terminal / torque      | See terminal drawing; Not specified       |
| Container              | ABS, UL94-HB                              |

# Construction & applications

High-output AGM construction for UPS standby power. Computer-designed grids, optimized paste and lead-calcium-tin plates support high energy density. Design life: 12+ years at 20°C.

## Battery construction

|                 |                   |
|-----------------|-------------------|
| Positive plate  | Lead dioxide      |
| Negative plate  | Lead              |
| Container / lid | ABS / ABS         |
| Safety valve    | Rubber            |
| Terminals       | Copper            |
| Separator       | Glass fibre (AGM) |
| Electrolyte     | Sulfuric acid     |


## Features

- Insulated intercell connections.
- Gas recombination efficiency up to 99%.
- High-rate discharge performance.
- Special welding process.
- Self-regulating valves; no water topping-up.
- Shelf life without recharge: 6 months at 20°C.
- Low internal pressure; special AGM separators.
- Optimized for 5–15 min; loads up to 1 hour.

## Applications

- Uninterruptible power supplies (UPS).
- Telecommunications backup power.
- Power and energy infrastructure.
- Security and fire alarm systems.
- Renewable-energy systems.
- Medical equipment.
- Emergency lighting.
- Data centres.

## Dimensions and terminal details / mm

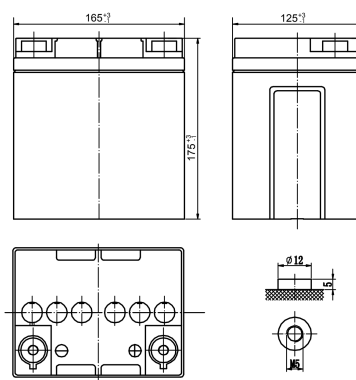

Dimensions and tolerances govern; do not scale the drawing.

# Discharge performance

Fully charged battery / 25°C

## Constant-current discharge / A

| V/cell | 3m     | 5m     | 10m   | 15m   | 20m   | 25m   | 30m   | 45m   | 1h    |
|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
| 1.60   | 168.00 | 131.00 | 90.20 | 67.30 | 56.10 | 48.10 | 42.10 | 31.10 | 24.70 |
| 1.65   | 158.00 | 125.00 | 86.20 | 64.80 | 54.00 | 46.30 | 40.70 | 30.00 | 23.90 |
| 1.67   | 154.00 | 123.00 | 84.60 | 63.80 | 53.20 | 45.60 | 40.20 | 29.50 | 23.50 |
| 1.70   | 148.00 | 116.00 | 78.50 | 60.30 | 50.30 | 43.10 | 38.30 | 28.00 | 22.50 |
| 1.75   | 139.00 | 108.00 | 74.20 | 56.80 | 47.50 | 40.10 | 35.10 | 26.60 | 21.30 |
| 1.80   | 127.00 | 103.00 | 71.10 | 54.80 | 45.60 | 39.40 | 35.00 | 25.70 | 20.80 |


## Constant-power discharge / W per cell

| V/cell | 3m     | 5m     | 10m    | 15m    | 20m   | 25m   | 30m   | 45m   | 1h    |
|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|
| 1.60   | 325.00 | 240.00 | 157.00 | 118.00 | 99.00 | 85.80 | 75.20 | 56.60 | 45.70 |
| 1.65   | 311.00 | 233.00 | 153.00 | 116.00 | 97.00 | 83.80 | 73.40 | 55.40 | 44.80 |
| 1.67   | 306.00 | 230.00 | 152.00 | 115.00 | 96.00 | 83.00 | 72.70 | 54.90 | 44.40 |
| 1.70   | 283.00 | 221.00 | 147.00 | 110.00 | 92.00 | 80.10 | 70.30 | 53.20 | 43.20 |
| 1.75   | 267.00 | 210.00 | 140.00 | 106.00 | 90.00 | 77.30 | 67.80 | 51.50 | 41.90 |
| 1.80   | 253.00 | 200.00 | 134.00 | 102.00 | 85.00 | 74.60 | 65.40 | 49.80 | 40.60 |


End voltage is per cell. Multiply W/cell by 6 for power per 12 V battery. Current is not divided by 6. Values are averages obtained within three charge/discharge cycles, not guaranteed minimums. Fully charge before testing. Product information may change without notice.

### Characteristic curves


#### Constant-current discharge

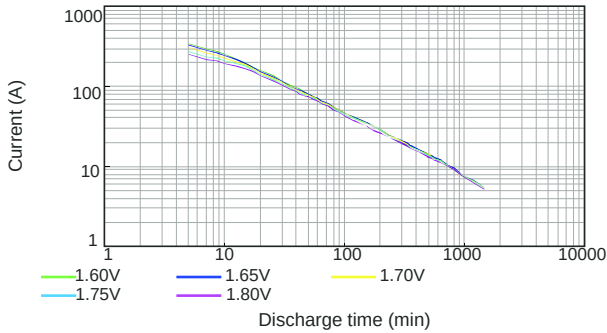


#### Constant-power discharge

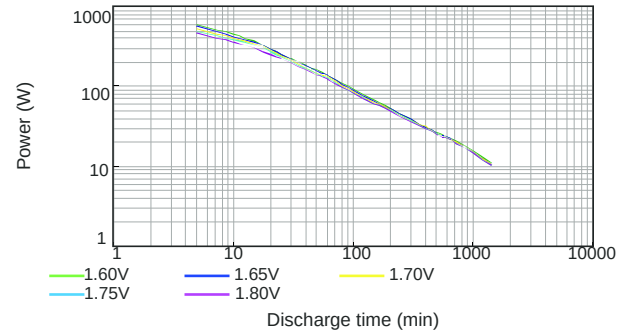


#### Discharge characteristics

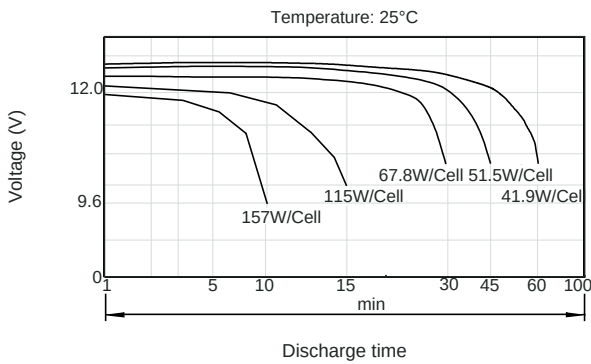


#### Charging characteristics

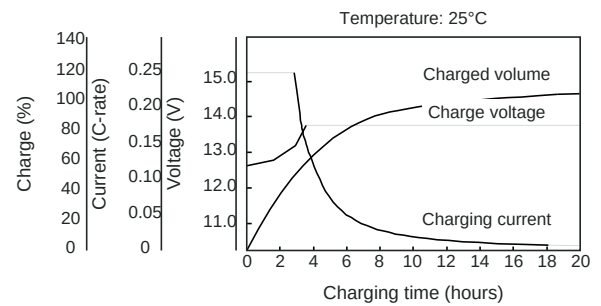


#### Charge voltage vs. temperature

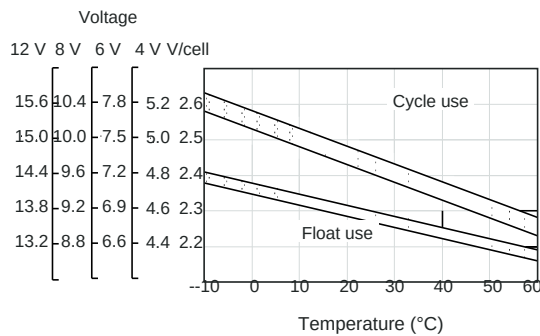


#### Self-discharge

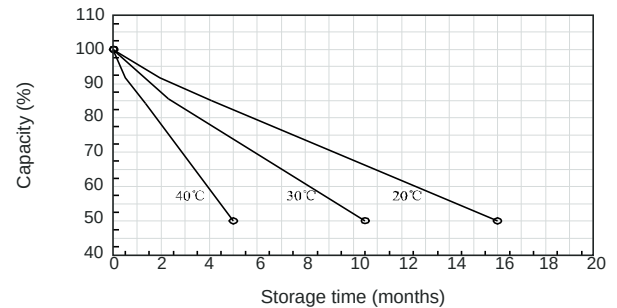

#### Float life vs. temperature

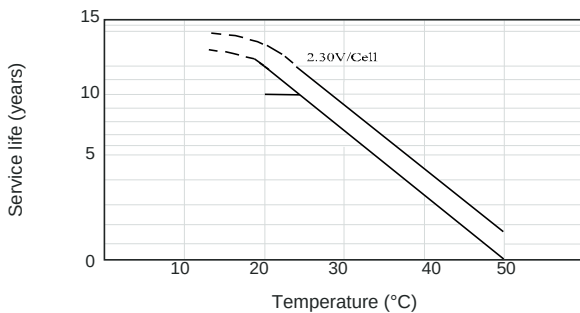

#### Standby service life

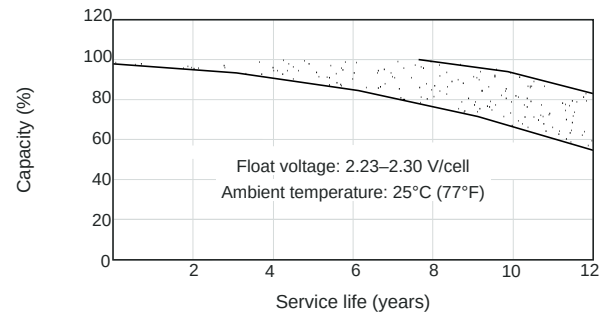

Typical characteristic curves. Model-specific ratings are given on pages 1 and 3. Design life is not a warranty.