

C4U1606 / 4E-PGU 1-60 H CL

Specifications and rack part list

Batteries	0 units; model not specified
Length	6000.00 mm
Width	745.00 mm
Height	1958.00 mm
Height above battery (catalogue)	1958.00 mm
Width B	675.00 mm
Battery weight	0.00 kg
Rack weight	562.00 kg
Total weight	562.00 kg
Projected surface load	125.73 kg/m ²
Load per isolator	56.20 kg
Clearance WR	402.00 mm
Center of gravity: x	373.00 mm
Center of gravity: y	3000.00 mm
Center of gravity: z	979.00 mm

Rack part list (manufacturer data)

Packages	Article	Length, mm	Width, mm	Height, mm	Weight, kg
6.0	5EPGL3	1943.00	715.00	50.00	17.00
10.0	1204	1225.00	115.00	90.00	14.00
2.0	1204C	1225.00	115.00	90.00	13.00
2.0	1206C	1225.00	160.00	90.00	21.00
5.0	CFP5E12	1860.00	1125.00	15.00	35.00
1.0	CSP5EPGL3	1860.00	745.00	90.00	30.00
5.0	CTPPGL312	1200.00	790.00	15.00	7.00
4.0	CEK5E	1860.00	135.00	15.00	3.00

Source state: empty rack. These are not permissible load ratings.


Row dimensions and weights are copied from the manufacturer catalogue; fasteners are not listed.

Manufacturer images may be shared by several rack lengths.


C4U1606 / 4E-PGU 1-60 H CL

Dimension drawing and footprint

Dimension drawing

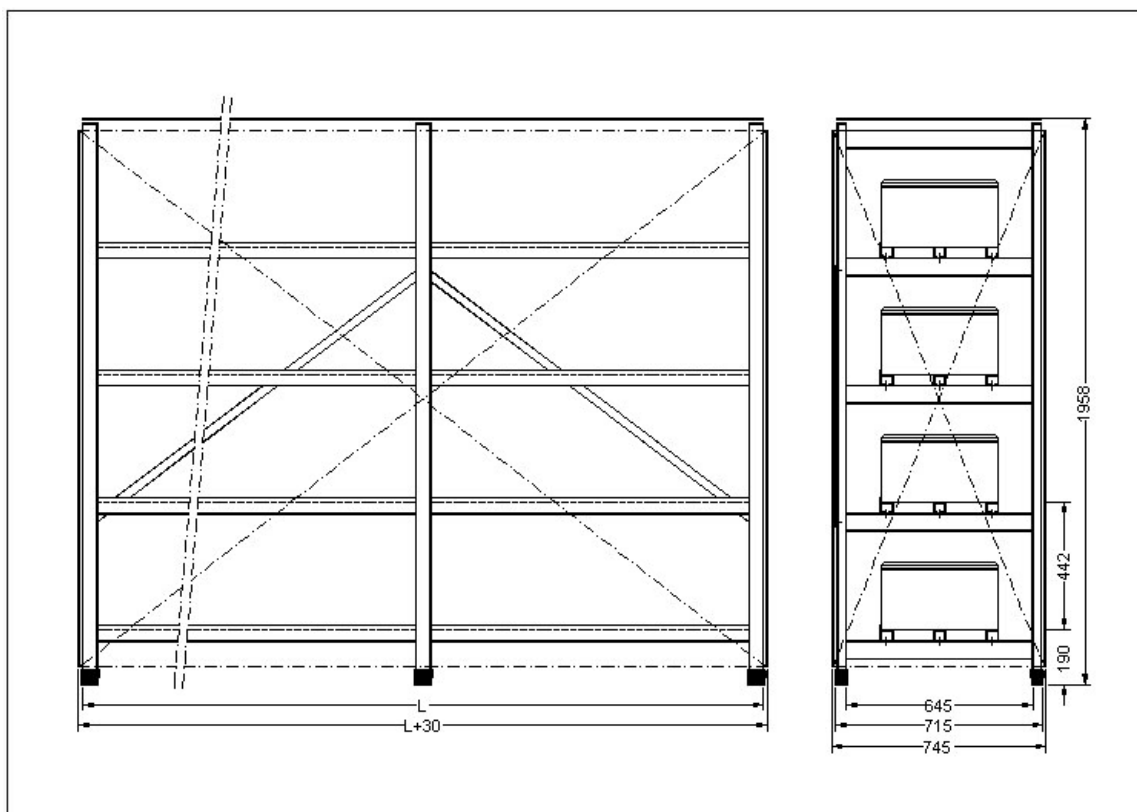

Footprint

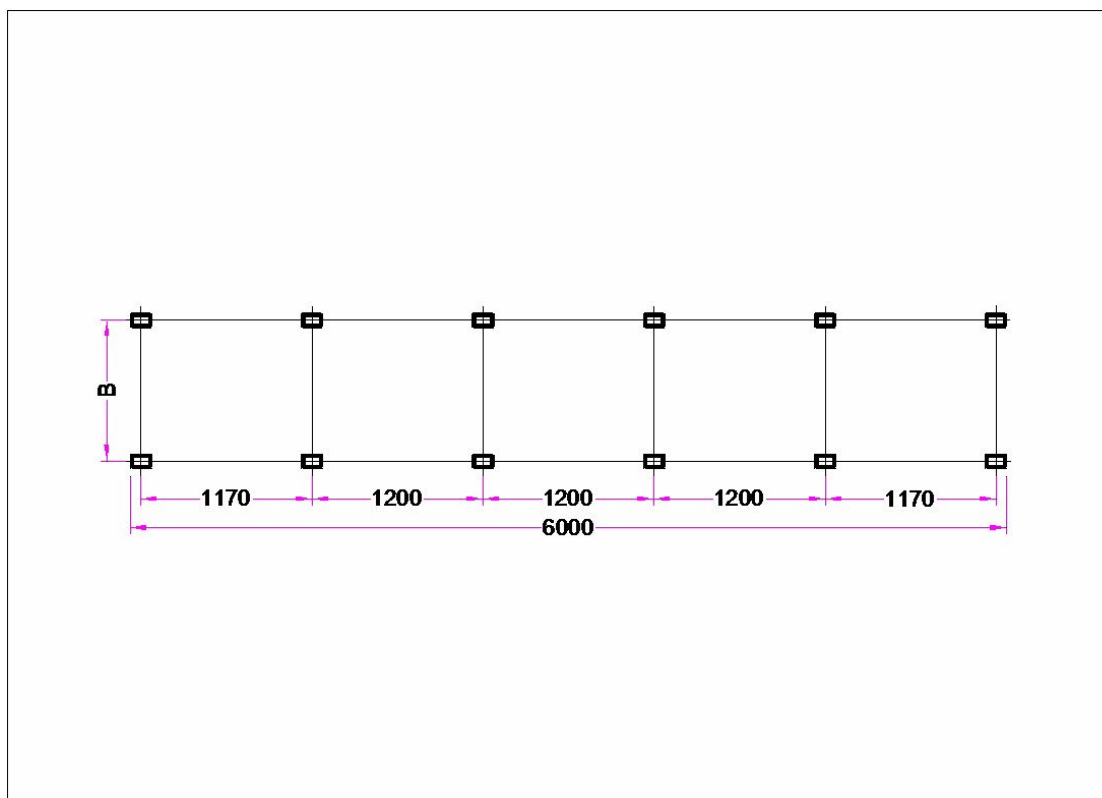

L = length; B = width between supports; H = height. Dimensions in mm.

C4U1606 / 4E-PGU 1-60 H CL

Visualization and clearance

Manufacturer photo / visualization



Clearance: generic explanatory illustration



The generic illustration does not show your battery arrangement.

C4U1606 / 4E-PGU 1-60 H CL

Center of gravity and sources

Center of gravity: generic illustration



Card information

Article: C4U1606

Manufacturer catalogue data.

Images are embedded for offline printing.